
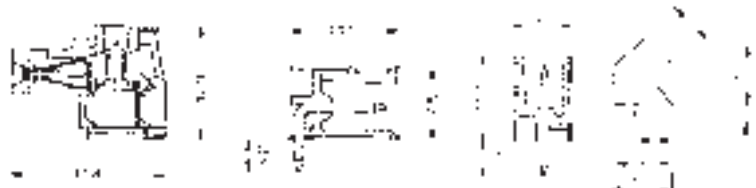


Plug In PCB Mounting Terminal Blocks

Plug-in 10A 3.5mm Pitch

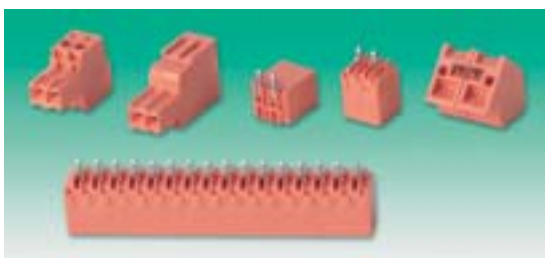

Voltage rating (VDE)	125V ac (Group C) 250V ac (Group B)	Contact pin Housing	Copper alloy, tin plated PBT
Current Rating	10A	Colour	Orange
Temperature Range	-20°C to +100°C	Wire size	0.5-1.5mm ²
Screw clamp	Steel, zinc plated		
Mfrs. List No.	BL3.5/x SL3.5/x/90G BLZ3.5/x SL3.5/x/180G SL3.5/x/135		

Where x = No of ways

209532

No. of Ways	Order Code	1+	25+	100+	250+	+
Free Plug - BL						
2	617-350	65.00	61.00	57.00	53.00	--
2	113-1800	65.00	61.00	57.00	53.00	--
3	617-362	80.00	--	--	--	--
3	113-1802	80.00	--	--	--	--
4	617-374	129.00	121.00	117.00	105.00	--
4	113-1803	129.00	121.00	117.00	105.00	--
5	617-386	195.00	192.00	182.00	160.00	--
5	113-1804	195.00	192.00	182.00	160.00	--
6	617-398	192.00	180.00	175.00	157.00	--
6	113-1805	192.00	180.00	175.00	157.00	--
8	617-404	261.00	246.00	237.00	216.00	--
8	113-1806	261.00	246.00	237.00	216.00	--
10	617-416	321.00	298.00	290.00	262.00	--
10	113-1807	321.00	298.00	290.00	262.00	--
12	617-428	382.00	360.00	345.00	319.00	--
12	113-1808	382.00	360.00	345.00	319.00	--
14	617-430	450.00	427.00	408.00	362.00	--
14	113-1809	450.00	427.00	408.00	362.00	--
16	617-441	652.00	615.00	579.00	509.00	--
16	113-1810	652.00	615.00	579.00	509.00	--
Free Plug - BLZF Series						
2	155-354	119.00	109.00	104.00	92.00	--
2	117-9250	87.00	83.00	80.00	76.00	--
3	155-366	180.00	166.00	158.00	138.00	--
3	117-9252	122.00	115.00	111.00	106.00	--
4	155-378	236.00	220.00	208.00	207.00	--
4	117-9253	236.00	220.00	209.00	--	--
5	155-380	297.00	276.00	262.00	230.00	--
5	117-9254	201.00	192.00	184.00	176.00	--
6	155-391	356.00	331.00	314.00	276.00	--
6	117-9255	242.00	228.00	222.00	211.00	--
8	155-408	472.00	437.00	416.00	364.00	--
8	117-9256	323.00	306.00	296.00	282.00	--
10	155-410	595.00	550.00	524.00	460.00	--
10	117-9248	402.00	382.00	369.00	351.00	--
12	155-421	716.00	663.00	630.00	551.00	--
12	117-9249	484.00	459.00	443.00	422.00	--
16	155-445	954.00	883.00	841.00	735.00	--
16	112-1767	954.00	883.00	841.00	735.00	--
Side Entry PCB Header-Closed End						
2	617-453	26.00	25.00	24.00	22.00	--
2	112-1786	26.00	25.00	24.00	22.00	--
3	617-465	37.00	36.00	34.00	31.00	--
3	112-1791	37.00	36.00	34.00	31.00	--
4	617-477	51.00	50.00	47.00	42.00	--
4	112-1793	51.00	50.00	47.00	42.00	--
		5+	25+	100+	250+	+
5	617-489	72.00	69.00	64.00	57.00	--
5	112-1795	72.00	69.00	64.00	57.00	--
6	617-490	78.00	76.00	71.00	66.00	--
6	112-1798	78.00	76.00	71.00	66.00	--
8	617-507	104.00	103.00	95.00	85.00	--
8	112-1801	104.00	103.00	95.00	85.00	--
10	617-519	126.00	124.00	114.00	103.00	--
10	112-1778	126.00	124.00	114.00	103.00	--
12	617-520	155.00	153.00	140.00	128.00	--
12	112-1780	155.00	153.00	140.00	128.00	--

		Price Each				
		5+	25+	100+	250+	+
14	112-1782	182.00	171.00	164.00	151.00	--
16	617-544	232.00	218.00	206.00	181.00	--
16	112-1784	232.00	218.00	206.00	181.00	--
Top Entry PCB Header-Closed End						
2	617-556	26.00	25.00	24.00	22.00	--
2	112-1785	26.00	25.00	24.00	22.00	--
3	617-568	30.00	--	--	--	--
3	112-1788	28.00	--	--	--	--
4	617-570	39.00	39.00	--	--	--
4	112-1792	37.00	36.00	--	--	--
5	617-581	55.00	53.00	53.00	50.00	--
5	112-1794	55.00	53.00	50.00	47.00	--
6	617-593	78.00	76.00	70.00	64.00	--
6	112-1797	78.00	76.00	70.00	64.00	--
8	617-600	103.00	102.00	94.00	86.00	--
8	112-1800	103.00	102.00	94.00	86.00	--
10	617-611	127.00	126.00	115.00	104.00	--
10	112-1776	127.00	126.00	115.00	104.00	--
12	617-623	155.00	153.00	140.00	128.00	--
12	112-1779	155.00	153.00	140.00	128.00	--
14	617-635	182.00	171.00	163.00	150.00	--
14	112-1781	182.00	171.00	163.00	150.00	--
16	617-647	194.00	184.00	175.00	166.00	--
16	112-1783	194.00	184.00	175.00	166.00	--
135° PCB Header - with fixing flange						
3	617-660	46.00	43.00	42.00	36.00	--
3	112-1787	46.00	43.00	42.00	36.00	--
6	617-696	94.00	88.00	83.00	74.00	--
6	112-1796	94.00	88.00	83.00	74.00	--
8	617-702	123.00	117.00	109.00	97.00	--
8	112-1799	123.00	117.00	109.00	97.00	--
10	617-714	155.00	147.00	138.00	122.00	--
10	112-1775	155.00	147.00	138.00	122.00	--

MC1.5 Series, Plug-in 8A
3.81mm Pitch




- Headers plug in direction parallel to the conductor axis
- Pitch 3.81mm

Current Rating	8A
Wire Size	0.14mm ² to 1.5mm ²

230300

No. of Mfrs. Ways	Type No.	Mfrs. List No.	Order Code	1+	25+	100+	250+
2	MC1.5/2-ST-3.81	1803578	370-4907	86.00	76.00	69.00	52.00
3	MC1.5/3-ST-3.81	1803581	370-4919	128.00	113.00	103.00	78.00
4	MC1.5/4-ST-3.81	1803594	370-4920	171.00	150.00	137.00	104.00
5	MC1.5/5-ST-3.81	1803604	370-4932	215.00	190.00	175.00	131.00
6	MC1.5/6-ST-3.81	1803617	370-4944	256.00	226.00	208.00	165.00
8	MC1.5/8-ST-3.81	1803633	370-4956	342.00	302.00	276.00	207.00
9	MC1.5/9-ST-3.81	1803646	370-4968	385.00	338.00	310.00	234.00
10	MC1.5/10-ST-3.81	1803659	370-4970	426.00	376.00	344.00	258.00
12	MC1.5/12-ST-3.81	1803675	370-4981	511.00	451.00	414.00	330.00

Plug-in 8A
3.81mm Pitch

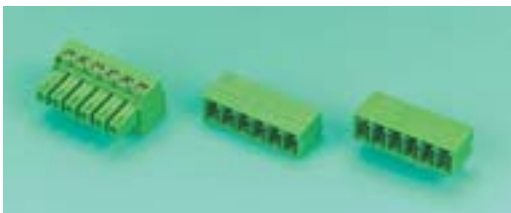

- Rising clamp terminals for wire protection
- Horizontal and vertical PCB Headers
- UL94V-0 flammability rating
- UL / IEC recognised

Rated Voltage	300V	Solid wire entry	1.5mm ²
Current Rating	8A	Screw size	M2
Temperature Range	-40°C to +105°C	Torque rating	0.25Nm
Flammability Class	UL94V-0	Colour	Green

411954

No of Mfrs. Ways	List No.	Order Code	1+	25+	100+	250+	+
Free Plug							
2	21.1550M/2	963-2735	62.00	58.00	55.00	49.00	--
3	21.1550M/3	963-2743	93.00	88.00	83.00	74.00	--
4	21.1550M/4	963-2751	123.00	118.00	111.00	99.00	--
5	21.1550M/5	963-2760	154.00	147.00	138.00	124.00	--
6	21.1550M/6	963-2778	185.00	176.00	166.00	148.00	--

6

Connectors - PCB

Compliant
Non-compliant
RoHS
+ Limited stock - RoHS replacement available