

## 3.5 Amp Bi-polar stepper motor drive

## MSE570 Evo 2

The MSE570 is a low cost high performance Eurocard Bi-polar drive designed for mounting in 3U high Euro-racks. Ideally suited for use with Nema size 23 & 34 stepper motors, the unit provides a wide range of current options. Designed for use by original equipment manufacturers, the unit provides a reliable and economic in-service proven' drive solution. Furthermore, the MSE570 design enables users to customise the unit to meet their exact requirements by providing a series of up-grade options which can easily be implemented.



### Improved Output stage efficiency

The MSE570 *Evo 2* features a chopped constant current output stage with on-board current settings from 0.5 to 3.5 Amps per phase to meet the requirements of virtually any 2 or 4 phase hybrid stepper motor in the Nema 17, 23 & 34 frame sizes. The use of chopped constant current drive techniques combined with the latest developments in power stage technology results in significant advances in efficiency. Furthermore, the output current may be reduced via an external input when the motor is at standstill to reduce temperature rise in the drive and the motor. The drive is designed for use with rail voltages from 24 to 48 Vdc such as MSE173 when up to 7 drives can be incorporated in a single rack together with the power supply. For high speed operation the 35 Vdc Power supply type MSE562 is recommended for single and dual axis applications depending on motor current settings.

### New Features

- Increased efficiency
- No heatsink required
- reduces width
- Increased operating voltage
- Single rail supply for both logic and motor
- Standard Thermal protection & condition monitoring

### Choice of full or half step drive

The MSE570 may be set to operate in full step or half step drive. Half step drive is recommended since it provides increased resolution ( 400 steps/rev. using conventional hybrid stepper motors ) together with improved smoothness and damping of motor resonance.

### Thermal Protection

A thermal sensor is fitted to prevent overheating of the output stages. The drive may be automatically disabled on over-temperature by setting switch SW1-1 on.

### Status LED's for condition monitoring

Provision on the MSE 570 drive board has been made for the user to add five status LED's. These may be soldered in location at the front edge of the board to provide a visual indication of drive condition. The function of each indicator is shown in the table.

LED 1	Green	Power in on
LED 2	yellow	Output is disabled
LED 3	Red	Over-temperature fault detected
LED 4	Red	Overload fault detected
LED 5	Yellow	Home phase output

## Customising the MSE 570 to meet individual application requirements

### Choice of external or internal step control


In most applications MSE570 will be operated in conjunction with an external control source consisting of a clock pulse train to determine rate and distance together with a direction signal. Where operation off line from the control processor is required a print on the circuit board is provided for the user to add a simple voltage controlled oscillator to facilitate manual control of the motor drive system.

# Specification



# MSE570

Type without front panel Type with front panel		<b>MSE570 Evo 2 PM 570</b>	Notes
Supply Voltage	Vdc	15-42 + 10% max.	Max ripple: 3 V peak/Peak Depending on motor selected Chopped constant current Open circuit for full step
Current consumption	Amps	1-3 A	
Output Stage		2 Phase Bi-polar	
Step logic		Full step / half step	
Logic Supply Voltage	Vdc	No separate supply required	Use motor supply
Output Stage			
Output current per phase	Amps	2 Phase Bi-polar 0.5 to 3.5	Chopped constant current Set by on-board DIP switch Open circuit for full step
Step logic		Full step / half step	
Control signals		CMOS Schmidt trigger	@ 12V with 10KΩ pull-up resistors & diode isolation or contact closure to 0V or open circuit
Logic 0: ( Low )	Volts	0 to 2	
Logic 1: ( high )	Volts	9V to 30V max.	
Monitor Outputs			Referenced to 0V @ 30mA max. + 24V max.
Low Level	Volts	1 max.	
High Level	Volts	Open Circuit	
Auxiliary outputs	Vdc Vdc	Regulated +12 @ 50mA max. Regulated + 5 @ 50mA max.	For use with on-board oscillator
Thermal Protection		Standard	Automatic shutdown protection
Condition monitoring		Standard	Via 5 way LED display
Up-grade options			User fit options: refer to manual
On board Oscillator		Optional	
Dimensions	Mm	100 high x 160 long x 60	Std. Eurocard : Use12E wide panel

## Typical Connections

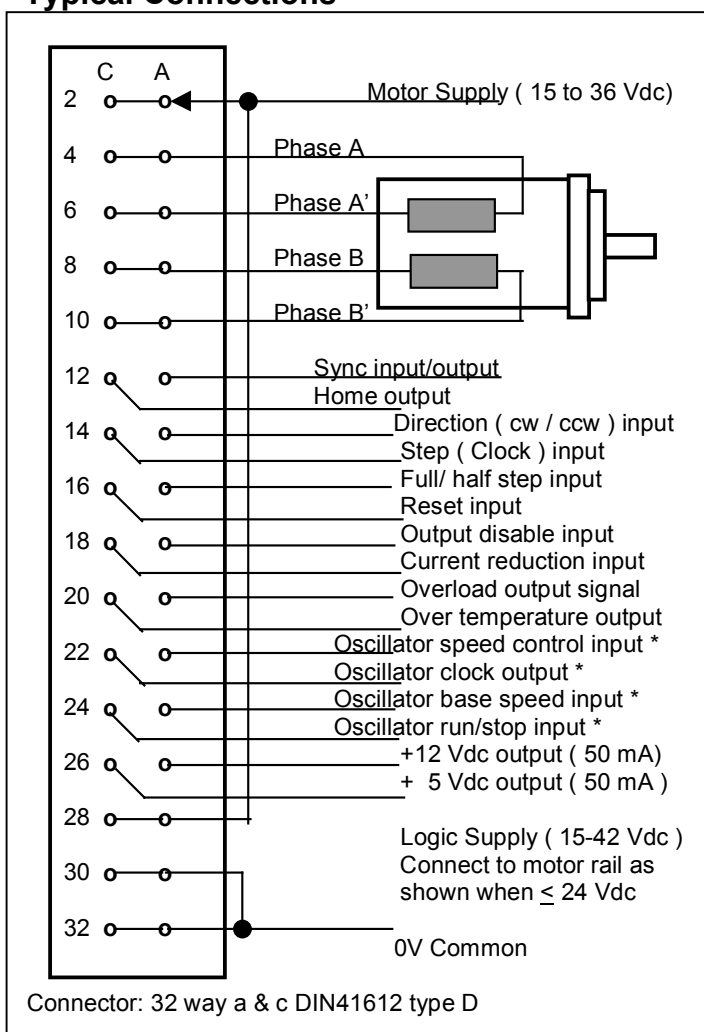

## External Oscillator connections \*

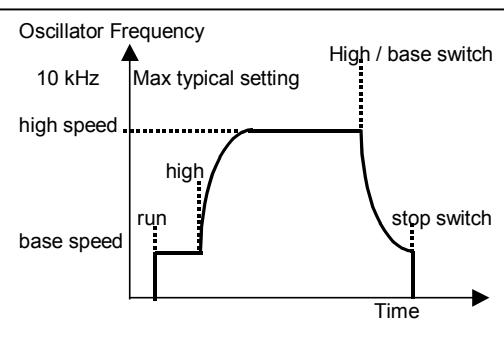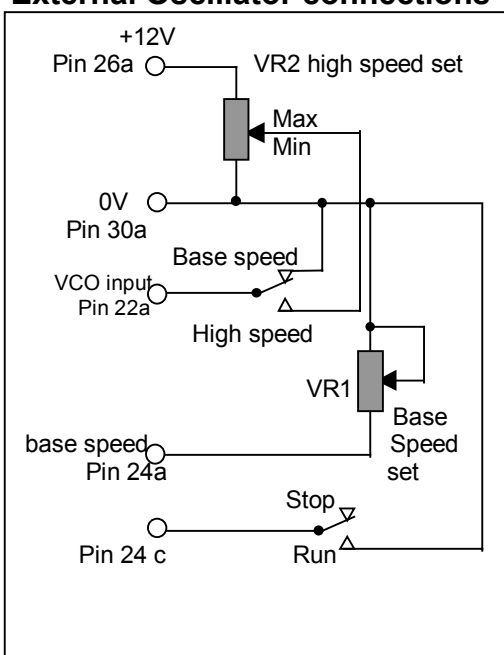

Note\* Oscillator connections when circuit is fitted to MSE 570 Printed circuit board

# Stepper motor drive current settings

# MSE570

The motor phase current can be set to suit the motor to be driven by the use of the on-board DIP switch fitted to the MSE570. The table below shows the nominal phase currents for each setting

Switch Setting				Nominal Current per phase ( Amps )	Typical Motor	Motor Connections	Typical Power Supply consumption @ 36 Vdc ( Amps )
SW2-1	SW2-2	SW2-3	SW2-4				
off	off	off	off	0			
off	off	off	on	0.5			1.0
off	off	on	off	0.9	<b>17HS-020</b>	<b>4 lead</b>	1.1
off	off	on	on	1.2	<b>23HS-102</b>	<b>parallel</b>	1.2
off	on	off	off	1.3	<b>23HSX-102</b>	<b>parallel</b>	1.3
off	on	off	on	1.6			1.4
off	on	on	off	1.85	<b>17HS-240</b>	<b>4 lead</b>	1.5
off	on	on	on	2.1	<b>23HS-104</b>	<b>parallel</b>	1.6
on	off	off	off	2.3	<b>23HS-304</b>	<b>parallel</b>	1.7
on	off	off	on	2.5	34HS-109	series	2.0
on	off	on	off	2.7	23HSX-202	parallel	2.2
on	off	on	on	2.9	<b>34HS-106</b>	<b>parallel</b>	2.4
on	on	off	off	3.0	34HS-209	series	2.5
on	on	off	on	3.1	23HS-109	series	2.6
on	on	on	off	3.3	<b>23HSX-206</b>	<b>parallel</b>	2.8
on	on	on	on	3.5	<b>23HS-309</b> <b>23HSX-306</b> <b>34HS-109</b> <b>34HS-209</b> <b>34HSX-108</b> <b>34HSX-208</b> <b>34HSX-312</b>	<b>parallel</b> <b>parallel</b> <b>parallel</b> <b>parallel</b> <b>parallel</b> <b>parallel</b> <b>series</b>	3.0

Recommended motor-drive-connection combinations shown in **BOLD**

## Rack mounting power supply

## MSE562

The MSE 562 is designed for mounting in a 3U high Eurorack and is ideal for use with the MSE570 drive card. The unit will power up to 2 small motor axes or a single axis using a 34HS size motor. For applications requiring multi-axis operation using a combination of motors requiring high current settings the MSE173 Power supply is recommended to drive up to 4 motors.

MSE562 provides a 35 Vdc motor rail for optimum high speed operation using the MSE570 drive together with a 24 Vdc supply for the drive's on-board logic circuits.

Alternatively where a small motor is to be used with the PM546 Drive to obtain ultra high speed operation the 70 Vdc rail may be utilised.



### Specification

Width 142.2 mm ( 28E )  
 Depth 220 mm  
 Mounting 3U high rack installation  
 Connector DIN41612 type D ( 32 way a & c )  
 AC Supply 230 / 115 Vac 50 or 60 Hz.

### Outputs:

5V  $\pm$ 0.25 V 1.5A Max 100mV ripple max.  
 24V  $\pm$  2.0 V 1.0 A Max. 2.5 V ripple max.  
 35V  $\pm$ 3.0 V 3.0A Max 4.0 V ripple max.  
 70V  $\pm$ 3.0 V 2.0 A Max 14.0 V ripple max.

**Connections:** Refer to handbook