

Variable Transformers

Single Phase - 1A to 28A





Features:


- Low cost.
- Precision wound.
- Rugged construction.
- Standard connections.
- Simple to use.
- Easy to install.
- Open Wound.

Input voltage : 240V ac.

Output voltage : 0 to 240/270V ac.

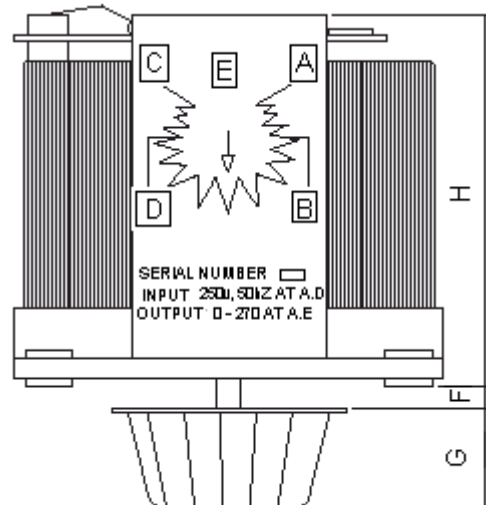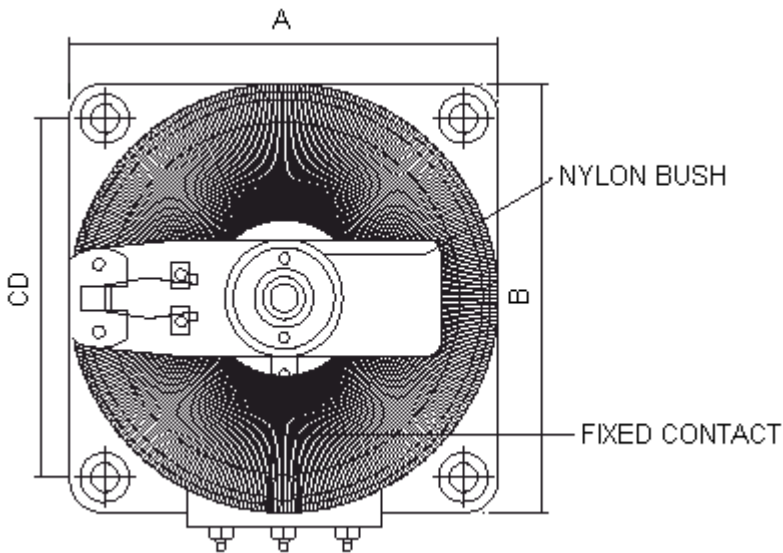

Single Phase Variac

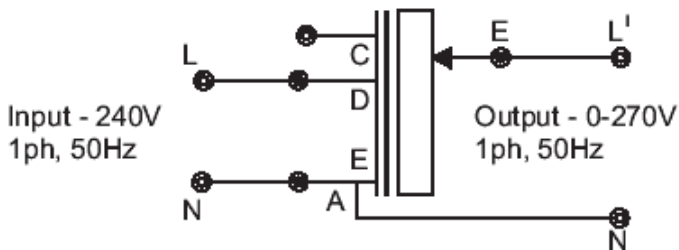

Connection Arrangement



Variable Transformers

Single Phase - 1A to 28A



Installation and Safety Instructions:

1. Installation, commissioning and maintenance should only be carried out by suitably qualified personnel.
2. Read all of the instructions before you use the transformer.
3. The input must always be applied across the appropriate terminals. Never connect the transformer in series with the load.
4. The transformer should be properly earthed using the earth stud or earth terminal.
5. This transformer operates at mains Voltage. DO NOT EXCEED THE MAXIMUM VOLTAGE AND CURRENT RATING.
6. This transformer is not designed to provide mains isolation.
7. Please note that when connected to the electrical supply the terminal brushes and tracks surface are at mains voltage which is potentially lethal.
8. The carbon brushes should be inspected for damage or wear, faulty or over worn brushes will result in damage to the windings.

Specifications

Maximum Current Rating (A)	Maximum VA	Height (Excluding Knob) (H)	Overall Width (A)	Overall Diameter (B)	Fixing Centres (C x D)	Diameter Fixing Hole	E	F	Height of the Knob (G)	Approximate Weight (Kg)	Part Number
1	240	99	83	99	-	-	-	-	20	1.550	MC1F-1
2	480	95	110	99	92 x 92	7.5	10	6	25	2.900	MC2F-1
3	720	115								3.300	MC3F-1
4	960	102	175	146 x 146	146 x 146	10	25	35	5.900	MC4F-1	
6	1440	110							6.800	MC6F-1	
10	1920	130							8.100	MC8F-1	
	2400	135	225	176 x 176	11	10	10	35	9.000	MC10F-1	
15	3600								12.000	MC15F-1	
20	4800	145	300	238 x 238	13	60	10	35	15.000	MC20F-1	
28	6720	160							22.000	MC28F-1	

Dimensions : Millimetres



Variable Transformers

Single Phase - 1A to 28A



Notes:

International Sales Offices:

 AUSTRALIA – Farnell InOne Tel No: ++ 61 2 9645 8888 Fax No: ++ 61 2 9644 7898	 FINLAND – Farnell InOne Tel No: ++ 358 9 560 7780 Fax No: ++ 358 9 345 5411	 NETHERLANDS – Farnell InOne Tel No: ++ 31 30 241 7373 Fax No: ++ 31 30 241 7333	 SWITZERLAND – Farnell InOne Tel No: ++ 41 1 204 64 64 Fax No: ++ 41 1 204 64 54
 AUSTRIA – Farnell InOne Tel No: ++ 43 662 2180 680 Fax No: ++ 43 662 2180 670	 FRANCE – Farnell InOne Tel No: ++ 33 474 68 99 99 Fax No: ++ 33 474 68 99 90	 NEW ZEALAND – Farnell InOne Tel No: ++ 64 9 357 0646 Fax No: ++ 64 9 357 0656	 UK – Farnell InOne Tel No: ++ 44 8701 200 200 Fax No: ++ 44 8701 200 201
 BELGIUM – Farnell InOne Tel No: ++ 32 3 475 2810 Fax No: ++ 32 3 227 3648	 GERMANY – Farnell InOne Tel No: ++ 49 89 61 39 39 39 Fax No: ++ 49 89 613 59 01	 NORWAY – Farnell InOne Tel No: ++ 45 44 53 66 66 Fax No: ++ 45 44 53 66 02	 UK – BuckHickman InOne ++ 44 8450 510 150 ++ 44 8450 510 130
 BRAZIL – Farnell-Newark InOne Tel No: ++ 55 11 4066 9400 Fax No: ++ 55 11 4066 9410	 HONG KONG – Farnell-Newark InOne Tel No: ++ 852 2268 9888 Fax No: ++ 852 2268 9899	 PORTUGAL – Farnell InOne Tel No: ++ 34 93 475 8804 Fax No: ++ 34 93 474 5288	 UK – CPC ++ 44 8701 202 530 ++ 44 8701 202 531
 CHINA – Farnell-Newark InOne Tel No: ++86 10 6238 5152 Fax No: ++86 10 6238 5022	 IRELAND – Farnell InOne Tel No: ++ 353 1 830 9277 Fax No: ++ 353 1 830 9016	 SINGAPORE – Farnell-Newark InOne Tel No: ++ 65 6788 0200 Fax No: ++ 65 6788 0300	 EXPORT – Farnell InOne Tel No: ++ 44 8701 200 208 Fax No: ++ 44 8701 200 209
 DENMARK – Farnell InOne Tel No: ++ 45 44 53 66 44 Fax No: ++ 45 44 53 66 06	 ITALY – Farnell InOne Tel No: ++ 39 02 93 995 200 Fax No: ++ 39 02 93 995 300	 SPAIN – Farnell InOne Tel No: ++ 34 93 475 8805 Fax No: ++ 34 93 474 5107	
 ESTONIA – Farnell InOne Tel No: ++ 358 9 560 7780 Fax No: ++ 358 9 345 5411	 MALAYSIA – Farnell-Newark InOne Tel No: ++ 60 3 7873 8000 Fax No: ++ 60 3 7873 7000	 SWEDEN – Farnell InOne Tel No: ++ 46 8 730 50 00 Fax No: ++ 46 8 83 52 62	

For enquiries from all other markets

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

