

Type D	Mfrs. List No.	Order Code	Price Each		
			1+	5+	10+
Two Pole					
1A	C60HD201	434-5939	2,662.00	--	--
2A	C60HD202	434-5940	2,540.00	--	--
4A	C60HD204	434-5952	2,489.00	2,446.00	--
6A	C60HD206	716-4749	2,418.00	2,374.00	--
10A	C60HD210	434-5964	2,219.00	--	--
16A	C60HD216	716-5067	2,219.00	--	--
20A	C60HD220	434-5976	2,217.00	2,216.00	--
25A	C60HD225	434-5988	2,684.00	--	--
32A	C60HD232	716-5079	2,281.00	--	--
40A	C60HD240	434-4790	2,279.00	--	--
50A	C60HD250	434-4807	2,541.00	--	--
63A	C60HD263	716-5080	2,564.00	--	--
Three Pole					
1A	C60HD301	434-4819	3,579.00	3,676.00	3,501.00
2A	C60HD302	434-4820	3,765.00	3,716.00	--
4A	C60HD304	434-4832	3,694.00	3,629.00	--
6A	C60HD306	716-5092	3,586.00	3,523.00	--
10A	C60HD310	434-4844	3,362.00	3,302.00	--
16A	C60HD316	716-5109	3,362.00	3,302.00	--
20A	C60HD320	434-4856	3,362.00	3,302.00	--
25A	C60HD325	434-4868	3,362.00	3,302.00	--
32A	C60HD332	716-5110	3,362.00	3,302.00	--
40A	C60HD340	434-4870	3,586.00	3,523.00	--
50A	C60HD350	434-4881	3,765.00	3,698.00	--
63A	C60HD363	716-5122	3,802.00	3,733.00	--
Four Pole					
1A	25211	434-4893	5,855.00	6,013.00	5,728.00
2A	25212	434-4900	5,523.00	5,674.00	5,404.00
4A	25214	434-4911	5,523.00	5,674.00	5,542.00
6A	25215	434-4923	5,523.00	5,340.00	5,404.00
10A	25216	434-4935	5,185.00	5,325.00	5,203.00
16A	25217	434-4947	5,509.00	5,325.00	5,072.00
20A	25218	434-4959	5,185.00	5,325.00	5,072.00
25A	25219	434-4960	5,185.00	5,325.00	5,072.00
32A	25220	434-4972	5,185.00	5,325.00	5,072.00
40A	25221	434-4984	5,523.00	5,674.00	5,404.00
50A	25222	434-4996	5,800.00	5,958.00	5,820.00
63A	25223	434-5009	5,855.00	6,013.00	5,877.00

Accessories	Mfrs. List No.	Order Code	Price Each		
			1+	5+	10+
Al. sw. SD	26927	717-1778	1,272.00	--	--
MN Uv rel 220/240V ac	26960	716-5663	3,182.00	--	--
MX Uv rel. 48V ac	26961	716-5675	2,936.00	2,805.00	--
Shield 1 Pole	26975	716-5699	205.00	194.00	186.00
Shield 2 Pole	26976	716-5705	240.00	239.00	--
Sealable Shield	26981	716-5729	169.00	--	--
Barrier	27001	716-5742	222.00	--	--
Lock C60H	20718	716-5766	441.00	--	--
Lock RMG	20719	716-5778	469.00	--	--

RMG Earth Leakage Protection RCDs



- 2 and 4-pole versions in ratings from 16 to 100A
- Positive contact indication in accordance with 16th Edition of the IEE Wiring Regulations
- Sensitivity 10, 30, 100 or 300mA
- Voltage rating 2 pole - 110/240V, 4 pole-240/415V
- Equipped with tunnel terminals for bare cable connection: 16-80A - 35mm², 100A - 50mm²
- Suitable for use as an incoming device on Merlin Gerin type A pan assembly
- Complete range of accessories available

The Merlin Gerin, Multi 9, RMG range of residual current devices provides the functions of isolation, switching and earth leakage protection of electrical circuits. The time-delayed version provides the above features whilst enabling discrimination with downstream devices.

Rating(A)	Poles	Sensitivity (mA)	Mfrs. List No	Order Code
RCDs				
16	2	10	RMG160102	716-8172
25	2	10	RMG250102	716-8184
25	2	30	RMG250302	716-8196
25	4	30	RMG250304	716-8202
25	4	300	RMG253004	716-8214
40	2	30	RMG400302	716-8226
40	4	30	RMG400304	716-8238
40	2	300	RMG403002	716-8240
40	4	300	RMG403004	716-8251
63	2	30	RMG630302	716-8263
63	4	30	RMG630304	716-8275
63	2	100	RMG631002	716-8287
63	4	100	RMG631004	716-8299
63	4	300	RMG633004	716-8317
80	2	30	RMG800302	716-8329
100	2	30	RMG1000302	716-8354
Time Delayed				
63	-	300	23146	716-8494


Accessories	Mfrs. List No	Order Code
MX shunt trip release:		

Rating(A)	Poles	Sensitivity (mA)	Mfrs. List No	Order Code
110V dc or 220/415V ac			26946	716-8548
48V dc or 48-130V ac			26947	716-8550
MN undervoltage release:	220/240V ac		26960	716-5663
Aux sw. OFS	RCD Monitor		26923	716-8603
Aux sw. OF	RCD Monitor		26924	716-8615

204558

Rating (A)	Pole	Mfrs. List No.	Order Code	1+	5+	+
RMG RCDs						
16	2-2	RMG160102	716-8172	6,046.00	--	--
25	2-2	RMG250102	716-8184	6,607.00	--	--
25	2-2	RMG250302	716-8196	4,413.00	4,407.00	--
25	4-4	RMG250304	716-8202	5,697.00	--	--
25	4-4	RMG253004	716-8214	4,941.00	--	--
40	2-2	RMG400302	716-8226	4,654.00	--	--
40	4-4	RMG400304	716-8238	6,087.00	--	--
40	2-2	RMG403002	716-8240	4,229.00	--	--
40	4-4	RMG403004	716-8251	5,328.00	--	--
63	2-2	RMG630302	716-8263	5,595.00	--	--
63	4-4	RMG630304	716-8275	8,199.00	--	--
63	2-2	RMG631002	716-8287	4,839.00	--	--
63	4-4	RMG631004	716-8299	6,852.00	--	--
63	4-4	RMG633004	716-8317	6,054.00	--	--
80	2-2	RMG800302	716-8329	6,863.00	--	--
100	2-2	RMG1000302	716-8354	7,843.00	--	--
63		23146	716-8494	8,150.00	--	--
Accessories						
MX rel. 110 - 415V ac			716-8548	1,893.00	--	--
MX rel.48V ac/dc			716-8550	1,669.00	--	--
Aux sw. OFS			716-8603	1,457.00	--	--
Aux sw. OF			716-8615	1,247.00	1,232.00	--
MN Uv rel 220/240V ac			716-5663	3,182.00	--	--

Type K Miniature Circuit Breakers

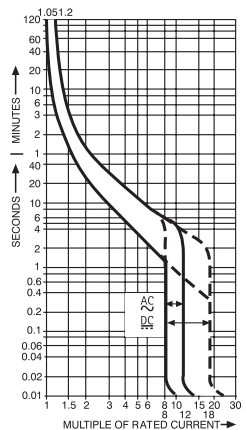

- Single, double and triple pole versions available
- Designed to offer optimal protection in one unit for both overload and short circuit conditions
- Allows for high inrush currents without nuisance tripping
- Thermal settings are identical to that of a conventional thermal overload with a maximum of 1.2 times the rated current
- Electromagnetic trip accepts inrush currents in excess of 8 times rated current without tripping (see tripping curve)
- MCB selected using the rated current of the motor and the selection table below
- Complies to IEC947-4-1
- Padlock accessories include adaptor and padlock with keys

Selection Table Standard Motor Range kW	Current @380VA	Nominal @15VA	Nominal 'K' Type MCB
0.06	0.22	0.2	0.2
0.09	0.33	0.3	0.3
0.12	0.42	0.4	0.3
0.18	0.64	0.6	0.5
0.25	0.88	0.74	0.75/0.5
0.37	1.22	1.1	1
0.55	1.5	1.4	1
0.75	2	2	1.6/2.0
1.1	2.6	2.5	2
1.5	3.5	3.5	3
2.2	5	5	4
3	6.6	6.5	6
4	8.5	8.1	8
5.5	11.5	11	10
7.5	15.5	14.5	16/10
11	22	21	20
15	30	28	25
18.5	37	35	32

Fuses, Circuit Breakers & Consumer Units

19

Compliant Non-compliant + Limited stock - RoHS replacement available

