




86SMX



CM309S




HC49/4H HC33/U, HC49/U



86SMX




CM309S




HC33/U

UM1



HC49/U

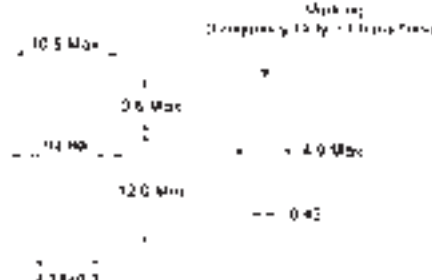

HC49/4H

210570

Frequency MHz	Can Style	Frequency Accuracy ±ppm @ 25°C	Temp. Stability ± ppm	Temperature Range °C	Load Cap
0.3072	HC33/U	◆±100		-10 to +60	30pF
1.8432	HC49/U	20	50ppm	-10 to +60	30pF
2.4576	HC49/U	30	50ppm	-10 to +60	30pF
2.4576	HC49/U	30	50ppm	-10 to +60	30pF
3.2768	HC49/4H	30	50ppm	-10 to +60	12pF
3.579545	HC49/U	30	50ppm	-20 to +70	30pF
3.579545	HC49/U	30	50ppm	-20 to +70	30pF
3.6864	CM309S	50	100ppm	-10 to +70	30pF
3.6864	CM309S	50	100ppm	-10 to +70	30pF
3.6864	HC49/U	30	50ppm	-20 to +70	30pF
4	CM309S	50	100ppm	-10 to +70	30pF
4	CM309S	50	100ppm	-10 to +70	30pF
4	HC49/U	30	50ppm	-20 to +70	30pF
4.096	HC49/U	30	50ppm	-20 to +70	30pF
4.194304	HC49/U	30	50ppm	-20 to +70	12pF
4.194304	HC49/4H	30	50ppm	-10 to +60	30pF
4.433619	HC49/4H	30	50ppm	-10 to +60	20pF
4.608	HC49/4H	50	50ppm	-10 to +60	30pF
4.9152	HC49/U	30	50ppm	-20 to +70	30pF
5	HC49/U	20	50ppm	-10 to +60	30pF
5	HC49/U	20	50ppm	-10 to +60	30pF
6	HC49/U	30	50ppm	-20 to +70	30pF
7.3728	HC49/U	30	50ppm	-20 to +70	30pF
7.68	HC49/4H	30	50ppm	-10 to +60	30pF
7.68	HC49/4H	30	50ppm	-10 to +60	30pF
8	CM309S	50	100ppm	-10 to +70	30pF
8	HC49/U	30	50ppm	-20 to +70	30pF
8.192	UM1	20	50ppm	-10 to +60	30pF
8.867237	HC49/U	20	50ppm	-10 to +60	20pF
8.867237	HC49/U	20	50ppm	-10 to +60	20pF
9.8304	HC49/4H	30	50ppm	-10 to +60	30pF
9.8304	HC49/4H	30	50ppm	-10 to +60	30pF
9.8304	HC49/U	20	50ppm	-10 to +60	30pF
10.752	HC49/4H	30	50ppm	-10 to +60	30pF
12	CM309S	50	100ppm	-10 to +70	30pF
12	HC49/U	30	50ppm	-20 to +70	30pF
12.288	HC49/U	20	50ppm	-10 to +60	30pF
12.288	UM1	20	50ppm	-10 to +60	30pF
12.288	UM1	20	50ppm	-10 to +60	30pF
14	HC49/U	20	50ppm	-10 to +60	30pF
14.31818	HC49/U	20	50ppm	-10 to +60	30pF
14.7456	HC49/4H	30	50ppm	-10 to +60	30pF
15	HC49/U	20	50ppm	-10 to +60	30pF
16	CM309S	50	100ppm	-10 to +70	30pF
16	CM309S	50	100ppm	-10 to +70	30pF
18	HC49/4H	50	50ppm	-10 to +60	30pF
16	HC49/U	20	30ppm	-10 to +60	30pF
18.432	HC49/4H	30	50ppm	-10 to +60	30pF
19.6608	HC49/U	20	50ppm	-10 to +60	Series
19.6608	HC49/U	20	50ppm	-10 to +60	30pF
20	HC49/U	20	50ppm	-10 to +60	30pF
22.1184	HC49/U	20	50ppm	-10 to +60	30pF
24	HC49/4H	50	50ppm	-10 to +60	30pF

Order Code	1+	10+	100+
950-9429	973.00	788.00	733.00
950-9623	184.00	137.00	116.00
569-823‡	133.00	99.00	84.00
950-9631	133.00	99.00	84.00
950-9445	220.00	140.00	102.00
493-065‡	69.00	41.00	36.00
950-9569	69.00	41.00	36.00
SMI 699-810‡	294.00	206.00	155.00
SMI 950-9933	294.00	206.00	155.00
950-9518	69.00	41.00	36.00
SMI 699-822‡	294.00	206.00	152.00
SMI 950-9941	294.00	206.00	152.00
950-9534	69.00	41.00	36.00
950-9593	69.00	41.00	36.00
950-9585	69.00	41.00	36.00
950-9801	92.00	70.00	55.00
950-9810	130.00	93.00	66.00
950-9879	95.00	71.00	56.00
950-9550	69.00	41.00	36.00
641-005‡	93.00	66.00	54.00
950-9909	93.00	66.00	54.00
950-9577	70.00	40.00	35.00
950-9542	69.00	41.00	36.00
638-511‡	130.00	93.00	66.00
950-9828	130.00	93.00	66.00
SMI 950-9950	294.00	206.00	152.00
950-9526	69.00	41.00	36.00
950-9453	271.00	190.00	155.00
177-403‡	159.00	79.00	47.00
950-9461	159.00	79.00	47.00
638-523‡	130.00	93.00	66.00
950-9836	130.00	93.00	66.00
950-9917	103.00	70.00	55.00
950-9844	130.00	93.00	66.00
SMI 950-9968	294.00	206.00	152.00
950-9500	69.00	41.00	36.00
950-9607	145.00	87.00	63.00
177-404‡	268.00	182.00	146.00
950-9470	268.00	182.00	146.00
950-9488	136.00	74.00	47.00
950-9615	173.00	107.00	75.00
950-9852	130.00	93.00	66.00
950-9437	136.00	68.00	46.00
SMI 699-858‡	294.00	206.00	152.00
SMI 950-9976	294.00	206.00	152.00
950-9887	130.00	93.00	66.00
950-9925	103.00	70.00	55.00
950-9860	130.00	93.00	66.00
103-915‡	130.00	86.00	57.00
950-9402	130.00	86.00	57.00
950-9674	81.00	61.00	51.00
950-9410	173.00	107.00	75.00
950-9895	107.00	84.00	73.00

Semiconductors - Integrated Circuits

23

Compliant
Non-compliant
RoHS
+ Limited stock - RoHS replacement available