

Weldy Accessories



WELDY

● All accessories can be used with the 'Weldy Pro' and the 'Weldy Plus' guns



CAB654

	Order Code	Price Each			
		1+	5+	10+	25+
Welding Nozzle	317-8651				
Shrink Reflector Nozzle	317-8663				
Glass Protection Nozzle	317-8675				
Wide Slot Nozzle	317-8687				
Reduction Nozzle	317-8699				
Overlap Welding Nozzle	317-8705				
Pressure Roller	317-8717				
Solder Sleeve Reflector	317-8729				

Cable Sleeving

Binding Sleeves 'Helsyn'

HellermannTyton



Extruded from a polychloroprene rubber compound to **UL94-HB**. Suitable for binding and identification of cable harnesses using indelible markers. Approved to **BS3G198** and **DEF.STAN 59-15**, complies with **BS3858**.

Operating temperature	-65°C to +95°C	Proof voltage	4000V
Intermittent temperature	+120°C	Resistivity	10 ¹² Ω/cm
Maximum Cable Dia.	Internal Dia.	Length	Suitable Tool Prongs
2.4	1.2	20	'SS'
3.0	1.5	20	'SS'
4.0	2.0	20	'SS'
6.0	3.0	25	'SS' or 'S'
10.0	5.0	25	'S'
15.0	7.5	25	'K'

150

100 Per Pack


Max. Cable Dia.	Internal Dia.	Mftrs. List No.	Order Code	1+	10+	25+	50+
2.4	1.2	H12BLACK	.424-924				
		H12BLUE	.424-936				
		H12GREEN	.424-950				
		H12PINK	.424-961				
		H12RED	.424-973				
3.0	1.5	H15BLACK	.424-985				
		H15BLUE	.424-997				
		H15BROWN	.425-000				
		H15GREEN	.425-011				
		H15PINK	.425-023				
		H15RED	.425-035				
4.0	2.0	H20BLACK	.425-047				
		H20BLUE	.425-059				
		H20BROWN	.425-060				
		H20GREEN	.425-072				
		H20PINK	.425-084				
		H20RED	.425-096				
6.0	3.0	H30BLACK	.425-102				
		H30BLUE	.425-114				
		H30BROWN	.425-126				
		H30GREEN	.425-138				
		H30PINK	.425-140				
		H30RED	.425-151				
10.0	5.0	H50BLACK	.425-163				
		H50BLUE	.425-175				
		H50GREEN	.425-199				
		H50PINK	.425-205				
		H50RED	.425-217				
15.0	7.5	H75BLACK	.425-229				
		H75RED	.425-278				

500 Per Pack

Max. Cable Dia.	Internal Dia.	Mftrs. List No.	Order Code	1+	10+	25+	50+
2.4	1.2	H12BLACK	.136-098				
		H12PINK	.136-104				
		H12RED	.136-116				
3.0	1.5	H15BLACK	.136-128				
		H15PINK	.136-130				
		H15RED	.136-141				
4.0	2.0	H20BLACK	.136-153				
		H20BLUE	.136-165				
		H20PINK	.136-177				
		H20RED	.136-189				
6.0	3.0	H30BLACK	.136-190				
		H30BLUE	.136-207				
		H30PINK	.136-219				
		H30RED	.136-220				
10.0	5.0	H50BLACK	.136-232				
		H50RED	.136-244				
15.0	7.5	H75BLACK	.136-256				

Fitting Tools For Binding Sleeves

HellermannTyton

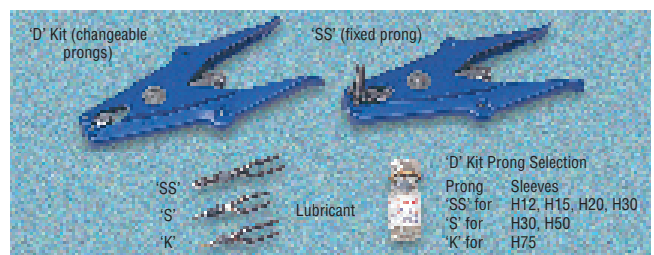

Two robustly constructed sleeve fitting tools, the 'SS' fixed prong tool is suitable for sleeves of an inside diameter up to 3.0mm, the tool with interchangeable prongs will cover all the sleeve ranges in the chart above. The 'D' kit is supplied with three sets of prongs, bottle of lubricant, three prong holding nuts, and a prong locator block which is recommended to be used when tightening the holding nuts.

148

Mftrs. List No.	Order Code	1+	5+	10+
'SS'	.303-150			
'D' kit	.151-080			

Lubricant

HellermannTyton



Recommended when fitting sleeves with the 'SS' and 147-754 tools. It is a non-conductor and can be used with all types of rubber and PVC parts. Supplied in a 10oz (284ml) bottle.

149

Order Code	1+	4+	8+
.101-619	8.01	7.20	6.48

Binding Sleeves



Extruded from a synthetic compound containing no natural rubber.

Colours: Black or Red
Operating temperature: -65°C to +90°C

151

200 Per Pack

Cable Dia.	Internal Dia.	Length	Order Code	1+	10+	50+	100+
Black							
3.0	1.5	12.7	101-611				
6.0	3.0	12.7	101-613				
10.0	5.0	19.0	101-615				
Red							
3.0	1.5	12.7	101-612				
6.0	3.0	12.7	101-614				

continued