

Agilent U1731A/32A Handheld LCR Meters

Data Sheet

LCR testing without the wait

Agilent U1731A/32A handheld LCR meters expand Agilent's portfolio of handheld tools into electronics assembly and passive components troubleshooting. Better yet, these handheld models extend the tradition of Agilent's industry-leading benchtop units to more affordable and portable forms.



Features

- 20,000 counts resolution
- Dual display with backlight (for U1732A)
- Wide LCR ranges with 2 to 4 selectable test frequencies
- Auto-calculation of phase angle (for U1732A), dissipation factor and quality factor
- Tolerance mode: 1%, 5% and 10% (20% with U1732A)
- Relative mode
- Hold and Min/Max/Average recordings
- Data logging to PC with optional IR-to-USB cable

No waiting for quick, basic LCR tests

Sharing a bench LCR meter is practical, but isn't always convenient. With Agilent's new line of handheld LCR meters, you can perform quick, basic LCR measurements at your convenience. Now that they're available at a lower price point compared to traditional benchtop units, everyone on your team can be equipped for passive-component testing—on the bench or on the go—without the wait.

Uncompromised quality and reliability

The U1731A/32A are housed in robust overmold and tested to stringent industrial standards. Each U1731A/32A is also sealed with a three-year warranty and the assurance that you can test your components with confidence.



Figure 1: Automate the recording of continuous readings when you hook the U1731A/32A to a PC



Agilent Technologies

Take a closer look

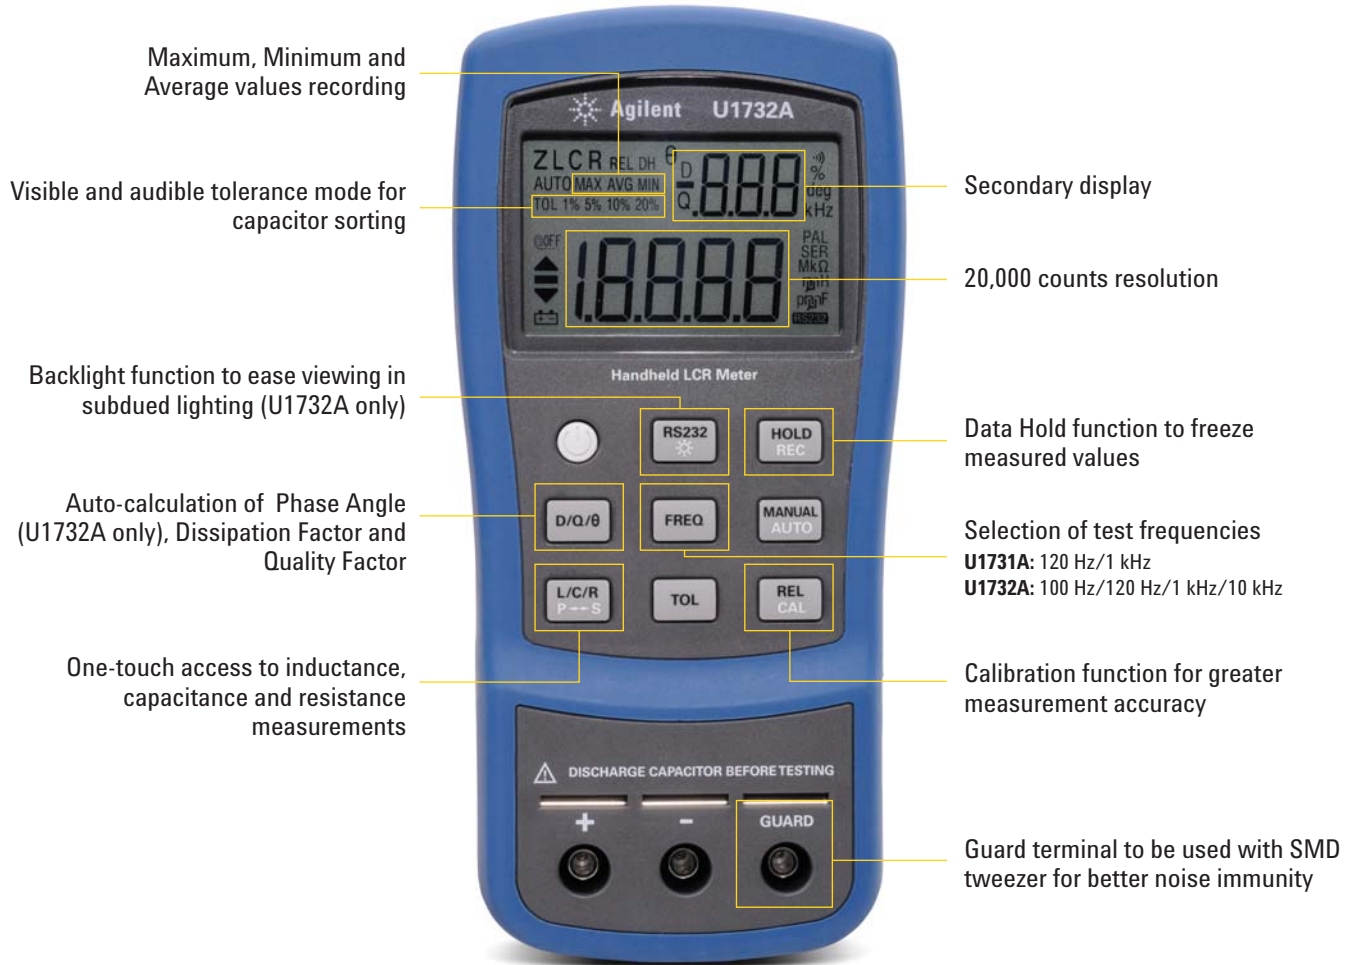


Figure 2: U1732A front view

U1731A Electrical Specifications

Accuracy is expressed as \pm (% of reading + number of least significant digits) at 23 °C \pm 5 °C and <75% R.H.

Resistance (Parallel Mode), Test Frequency = 120 Hz/1 kHz

| Range | Maximum Display | Accuracy | | Note |
|-----------------|-------------------|-----------|-----------|------------------|
| | | @ 120 Hz | @ 1 kHz | |
| 10 M Ω | 9.999 M Ω | 2.0% + 8 | 2.0% + 8 | After open cal. |
| 2000 k Ω | 1999.9 k Ω | 0.5% + 5 | 0.5% + 5 | After open cal. |
| 200 k Ω | 199.99 k Ω | 0.5% + 3 | 0.5% + 3 | - |
| 20 k Ω | 19.999 k Ω | 0.5% + 3 | 0.5% + 3 | - |
| 2000 Ω | 1999.9 Ω | 0.5% + 3 | 0.5% + 3 | - |
| 200 Ω | 199.99 Ω | 0.8% + 5 | 0.8% + 5 | After short cal. |
| 20 Ω | 19.999 Ω | 1.2% + 40 | 1.2% + 40 | After short cal. |

Capacitance (Parallel Mode), Test Frequency = 120 Hz

| Range | Maximum Display | Accuracy | | Note |
|---------|--------------------------|-------------------|----------------------------|------------------|
| | | Capacitance | DF | |
| 10 mF | 19.99 mF ^[1] | 3.0% + 5 (DF<0.1) | 10% + 100/Cx + 5 (DF<0.1) | After short cal. |
| 1000 µF | 1999.9 µF ^[2] | 1.0% + 5 (DF<0.1) | 2.0% + 100/Cx + 5 (DF<0.1) | After short cal. |
| 200 µF | 199.99 µF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 20 µF | 19.999 µF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 2000 nF | 1999.9 nF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 200 nF | 199.99 nF | 0.7% + 5 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | After open cal. |
| 20 nF | 19.999 nF | 1.0% + 5 (DF<0.1) | 2.0% + 100/Cx + 5 (DF<0.1) | After open cal. |

Capacitance (Parallel Mode), Test Frequency = 1 kHz

| Range | Maximum Display | Accuracy | | Note |
|---------|-------------------------|-------------------|----------------------------|------------------|
| | | Capacitance | DF | |
| 1 mF | 1.999 mF ^[1] | 3.0% + 5 (DF<0.1) | 10% + 100/Cx + 5 (DF<0.1) | After short cal. |
| 200 µF | 199.99 µF | 1.0% + 5 (DF<0.1) | 2.0% + 100/Cx + 5 (DF<0.1) | After short cal. |
| 20 µF | 19.999 µF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 2000 µF | 1999.9 µF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 200 nF | 199.99 nF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 20 nF | 19.999 nF | 0.7% + 5 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | After open cal. |
| 2000 pF | 1999.9 pF | 1.0% + 5 (DF<0.1) | 2.0% + 100/Cx + 5 (DF<0.1) | After open cal. |

[1] This reading can be extended up to 1999 MAX display with accuracy that is not specified.

[2] This reading can be extended up to 19999 MAX display with accuracy that is not specified.

[3] Q value is the reciprocal of DF.

[4] Cx = Counts of displayed C value. E.g., If C = 88.88 µF then Cx = 8888.

Inductance (Series Mode), Test Frequency = 120 Hz

| Range | Maximum Display | Accuracy | | Note |
|---------|-----------------|-----------------------------|------------------------|------------------|
| | | Inductance | DF | |
| 1000 H | 999.9 H | $1.0\% + (L_x/10000)\% + 5$ | $2.0\% + 100/L_x + 5$ | After open cal. |
| 200 H | 199.99 H | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 20 H | 19.999 H | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 2000 mH | 1999.9 mH | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 200 mH | 199.99 mH | $1.0\% + (L_x/10000)\% + 5$ | $3.0\% + 100/L_x + 5$ | After short cal. |
| 20 mH | 19.999 mH | $2.0\% + (L_x/10000)\% + 5$ | $10.0\% + 100/L_x + 5$ | After short cal. |

Inductance (Series Mode), Test Frequency = 1 kHz

| Range | Maximum Display | Accuracy | | Note |
|---------|-----------------|-----------------------------|------------------------|------------------|
| | | Inductance | DF | |
| 100 H | 99.99 H | $1.0\% + (L_x/10000)\% + 5$ | $2.0\% + 100/L_x + 5$ | After open cal. |
| 20 H | 19.999 H | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 2000 mH | 1999.9 mH | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 200 mH | 199.99 mH | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 20 mH | 19.999 mH | $1.0\% + (L_x/10000)\% + 5$ | $3.0\% + 100/L_x + 5$ | After short cal. |
| 2000 nH | 1999.9 nH | $2.0\% + (L_x/10000)\% + 5$ | $10.0\% + 100/L_x + 5$ | After short cal. |

[1] Q value is the reciprocal of DF.

[2] L_x = Counts of displayed L value. E.g., If L = 88.88 H then L_x = 8888.

U1732A Electrical Specifications

Accuracy is expressed as \pm (% of reading + number of least significant digits) at $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ and $<75\%$ R.H.

Resistance (Parallel Mode), Test Frequency = 100 Hz/120 Hz

| Range | Maximum Display | Accuracy | | Note |
|-----------------|-------------------|-----------|-----------|------------------|
| | | @ 100 Hz | @ 120 Hz | |
| 10 M Ω | 9.999 M Ω | 2.0% + 8 | 2.0% + 8 | After open cal. |
| 2000 k Ω | 1999.9 k Ω | 0.5% + 5 | 0.5% + 5 | After open cal. |
| 200 k Ω | 199.99 k Ω | 0.5% + 3 | 0.5% + 3 | - |
| 20 k Ω | 19.999 k Ω | 0.5% + 3 | 0.5% + 3 | - |
| 2000 Ω | 1999.9 Ω | 0.5% + 3 | 0.5% + 3 | - |
| 200 Ω | 199.99 Ω | 0.8% + 5 | 0.8% + 5 | After short cal. |
| 20 Ω | 19.999 Ω | 1.2% + 40 | 1.2% + 40 | After short cal. |

Resistance (Parallel Mode), Test Frequency = 1 kHz/10 kHz

| Range | Maximum Display | Accuracy | | Note |
|-----------------|-------------------|-----------|------------|------------------|
| | | @ 1 kHz | @ 10 kHz | |
| 10 M Ω | 9.999 M Ω | 2.0% + 8 | 3.5% + 10 | After open cal. |
| 2000 k Ω | 1999.9 k Ω | 0.5% + 5 | 2.0% + 10 | After open cal. |
| 200 k Ω | 199.99 k Ω | 0.5% + 3 | 1.5% + 5 | - |
| 20 k Ω | 19.999 k Ω | 0.5% + 3 | 1.5% + 5 | - |
| 2000 Ω | 1999.9 Ω | 0.5% + 3 | 1.5% + 5 | - |
| 200 Ω | 199.99 Ω | 0.8% + 5 | 2.0% + 10 | After short cal. |
| 20 Ω | 19.999 Ω | 1.2% + 40 | 2.5% + 200 | After short cal. |

Capacitance (Parallel Mode), Test Frequency = 100 Hz/120 Hz

| Range | Maximum Display | Accuracy | | Note |
|---------|--------------------------|-------------------|----------------------------|------------------|
| | | Capacitance | DF | |
| 10 mF | 19.99 mF ^[1] | 3.0% + 5 (DF<0.1) | 10% + 100/Cx + 5 (DF<0.1) | After short cal. |
| 1000 µF | 1999.9 µF ^[2] | 1.0% + 5 (DF<0.1) | 2.0% + 100/Cx + 5 (DF<0.1) | After short cal. |
| 200 µF | 199.99 µF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 20 µF | 19.999 µF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 2000 nF | 1999.9 nF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 200 nF | 199.99 nF | 0.7% + 5 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | After open cal. |
| 20 nF | 19.999 nF | 1.0% + 5 (DF<0.1) | 2.0% + 100/Cx + 5 (DF<0.1) | After open cal. |

Capacitance (Parallel Mode), Test Frequency = 1 kHz

| Range | Maximum Display | Accuracy | | Note |
|---------|-------------------------|-------------------|----------------------------|------------------|
| | | Capacitance | DF | |
| 1 mF | 1.999 mF ^[1] | 3.0% + 5 (DF<0.1) | 10% + 100/Cx + 5 (DF<0.1) | After short cal. |
| 200 µF | 199.99 µF | 1.0% + 5 (DF<0.1) | 2.0% + 100/Cx + 5 (DF<0.1) | After short cal. |
| 20 µF | 19.999 µF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 2000 nF | 1999.9 nF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 200 nF | 199.99 nF | 0.7% + 3 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | - |
| 20 nF | 19.999 nF | 0.7% + 5 (DF<0.5) | 0.7% + 100/Cx + 5 (DF<0.5) | After open cal. |
| 2000 pF | 1999.9 pF | 1.0% + 5 (DF<0.1) | 2.0% + 100/Cx + 5 (DF<0.1) | After open cal. |

Capacitance (Parallel Mode), Test Frequency = 10 kHz

| Range | Maximum Display | Accuracy | | Note |
|---------|-----------------|-------------------|------------------------------|------------------|
| | | Capacitance | DF | |
| 50 µF | 50.0 µF | 3.0% + 8 (DF<0.1) | 12.0% + 100/Cx + 10 (DF<0.1) | After short cal. |
| 20 µF | 19.999 µF | 3.0% + 6 (DF<0.2) | 5.0% + 100/Cx + 8 (DF<0.2) | After short cal. |
| 2000 nF | 1999.9 nF | 1.5% + 5 (DF<0.5) | 1.5% + 100/Cx + 6 (DF<0.5) | - |
| 200 nF | 199.99 nF | 1.5% + 5 (DF<0.5) | 1.5% + 100/Cx + 6 (DF<0.5) | - |
| 20 nF | 19.999 nF | 1.5% + 5 (DF<0.5) | 1.5% + 100/Cx + 6 (DF<0.5) | - |
| 2000 pF | 1999.9 pF | 2.0% + 6 (DF<0.5) | 3.0% + 100/Cx + 6 (DF<0.1) | After open cal. |
| 200pF | 199.99 pF | 3.0% + 8 (DF<0.1) | 5.0% + 100/Cx + 8 (DF<0.1) | After open cal. |

[1] This reading can be extended up to 1999 MAX display with accuracy that is not specified.
 [2] This reading can be extended up to 19999 MAX display with accuracy that is not specified.
 [3] Q value is the reciprocal of DF.
 [4] Cx = Counts of displayed C value. E.g., If C = 88.88 µF then Cx = 8888.

Inductance (Series Mode), Test Frequency = 100 Hz/120 Hz

| Range | Maximum Display | Accuracy | | Note |
|---------|-----------------|-----------------------------|------------------------|------------------|
| | | Inductance | DF | |
| 1000 H | 999.9 H | $1.0\% + (L_x/10000)\% + 5$ | $2.0\% + 100/L_x + 5$ | After open cal. |
| 200 H | 199.99 H | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 20 H | 19.999 H | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 2000 mH | 1999.9 mH | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 200 mH | 199.99 mH | $1.0\% + (L_x/10000)\% + 5$ | $3.0\% + 100/L_x + 5$ | After short cal. |
| 20 mH | 19.999 mH | $2.0\% + (L_x/10000)\% + 5$ | $10.0\% + 100/L_x + 5$ | After short cal. |

Inductance (Series Mode), Test Frequency = 1 kHz

| Range | Maximum Display | Accuracy | | Note |
|--------------|-----------------|-----------------------------|------------------------|------------------|
| | | Inductance | DF | |
| 100 H | 99.99 H | $1.0\% + (L_x/10000)\% + 5$ | $2.0\% + 100/L_x + 5$ | After open cal. |
| 20 H | 19.999 H | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 2000 mH | 1999.9 mH | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 200 mH | 199.99 mH | $0.7\% + (L_x/10000)\% + 5$ | $1.2\% + 100/L_x + 5$ | - |
| 20 mH | 19.999 mH | $1.0\% + (L_x/10000)\% + 5$ | $3.0\% + 100/L_x + 5$ | After short cal. |
| 2000 μ H | 1999.9 μ H | $2.0\% + (L_x/10000)\% + 5$ | $10.0\% + 100/L_x + 5$ | After short cal. |

Inductance (Series Mode), Test Frequency = 10 kHz

| Range | Maximum Display | Accuracy | | Note |
|--------------|-----------------|------------------------------|------------------------|------------------|
| | | Inductance | DF | |
| 1000 mH | 999.9 mH | $2.0\% + (L_x/10000)\% + 8$ | $2.0\% + 100/L_x + 10$ | - |
| 200 mH | 199.99 mH | $1.5\% + (L_x/10000)\% + 8$ | $2.0\% + 100/L_x + 10$ | - |
| 20 mH | 19.999 mH | $1.0\% + (L_x/10000)\% + 10$ | $3.0\% + 100/L_x + 15$ | - |
| 2000 μ H | 1999.9 μ H | $2.0\% + (L_x/10000)\% + 10$ | $8.0\% + 100/L_x + 20$ | After short cal. |

[1] Q value is the reciprocal of DF.

[2] L_x = counts of displayed L value. E.g., If L = 88.88 H, then L_x = 8888.

General Specifications

| Parameter | U1731A | U1732A | | |
|--|---|------------------------------|-------------------------------|------------------------------|
| Measurements | L/C/R/D/Q | L/C/R/D/Q/θ | | |
| Tolerance mode | 1%, 5%, 10% | 1%, 5%, 10%, 20% | | |
| Test frequency (Accuracy = ±0.1% of actual test frequency) | Test frequency setting | Actual test frequency | Test frequency setting | Actual test frequency |
| | 120 Hz | 1 kHz | 1 kHz | 10 kHz |
| | 120 Hz | 1010 Hz | 1010 Hz | 9.6 kHz |
| | 100 Hz | 120 Hz | | |
| | 100 Hz | 120 Hz | | |
| Measuring circuit mode | Inductance (L): Defaults to series mode Capacitance/Resistance (C/R): Defaults to parallel mode | | | |
| Display | L/C/R : Maximum display 19999 D/Q: Maximum display 999 (Auto range) | | | |
| Backlight | Available for model U1732A | | | |
| Ranging mode | Auto and Manual | | | |
| Test signal level | ~0.6 V _{RMS} | | | |
| Measuring rate | 1 reading/s, nominal | | | |
| Response time | ~1 s/DUT (manual range) | | | |
| Auto power-off | ~5 mins without operation | | | |
| Power supply | <ul style="list-style-type: none"> • 9 V Alkaline battery (ANSI/NEDA 1604A or IEC 6LR61) • AC power adapter and cord available as options | | | |
| Power consumption | ~40 mA (on battery operation) 0.08 mA after auto power-off | | | |
| Input protection fuse | 0.1 A/250 V | | | |
| Battery life | 7 hours (typical) without backlight and based on new alkaline | | | |
| Low battery indicator | ⊕ ⊖ will appear when the voltage drops below ~ 6.8 V | | | |
| Operating environment | 0 °C to 40 °C; 0 to 70% relative humidity (R.H.) | | | |
| Storage environment | -20 °C to 50 °C; 0 to 80% R.H. non-condensing | | | |
| Temperature coefficient | 0.15 x (specified accuracy)/°C (0 °C to 18 °C or 28 °C to 40 °C) | | | |
| Weight | 330 g | | | |
| Dimension (H x W x D) | 87 mm x 184 mm x 41 mm | | | |
| Safety and EMC compliance | IEC 61010-1:2001/EN 61010-1:2001 (2 nd Edition) Pollution Degree 2, IEC 61326-2-1:2005/ EN 61326-2-1:2006, ICES-001:2004, AS/NZS CISPR11:2004 | | | |
| Calibration | One-year calibration cycle recommended | | | |
| Warranty | 3 years | | | |

Ordering Information

Standard shipped items



Standard U1731A and U1732A ordering includes:

- Quick Start Guide
- User's and Service Guide (included in Product Reference CD)
- Certificate of Calibration (CoC)
- Alligator clip leads
- Data logging software (included in Product Reference CD)
- 9 V Alkaline battery

Option U1731A-SMD and U1732A-SMD ordering includes:

SMD tweezer and soft carrying case in addition to the standard shipped items

Optional accessories



U1174A Soft carrying case



U5481A IR-to-USB cable



U1782A SMD tweezer



U1780A Power adapter and cord (according to country)



U1781A Alligator clip leads



Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect
Quickly choose and use your test equipment solutions with confidence.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

www.agilent.com/find/removealldoubt

Product specifications and descriptions in this document subject to change without notice.

www.agilent.com
www.agilent.com/find/handheldlcr

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

Americas

| | |
|---------------|----------------|
| Canada | (877) 894-4414 |
| Latin America | 305 269 7500 |
| United States | (800) 829-4444 |

Asia Pacific

| | |
|-----------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 112 929 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Thailand | 1 800 226 008 |

Europe & Middle East

| | |
|----------------|---------------------------------|
| Austria | 01 36027 71571 |
| Belgium | 32 (0) 2 404 93 40 |
| Denmark | 45 70 13 15 15 |
| Finland | 358 (0) 10 855 2100 |
| France | 0825 010 700* *0.125€/minute |
| Germany | 07031 464 6333 |
| Ireland | 1890 924 204 |
| Israel | 972-3-9288-504/544 |
| Italy | 39 02 92 60 8484 |
| Netherlands | 31 (0) 20 547 2111 |
| Spain | 34 (91) 631 3300 |
| Sweden | 0200-88 22 55 |
| Switzerland | 0800 80 53 53 |
| United Kingdom | 44 (0) 118 9276201 |

Other European Countries:

www.agilent.com/find/contactus

Revised: October 6, 2008

© Agilent Technologies, Inc. 2009
Printed in USA, February 4, 2009
5990-3458EN



Agilent Technologies