

XLR Style — Continued

XLR Adaptors, Attenuators and Gender Changers

Black




Best Value



CA025

Adaptors	Input	Output	Mfrs. List No.	Order Code	1+	10+	50+
XLR Female	XLR Male		739-0030	582-189			
XLR Male	3 pole 1/4" plug		739-0040	582-190			
XLR Male	2 pole 1/4" plug		739-0050	582-207			
XLR Female	3 pole 1/4" plug		739-0060	582-219			
XLR Female	2 pole 1/4" plug		739-0070	582-220			
XLR Male	Phono Plug		739-0080	582-232			
XLR Male	Phono Socket		739-0090	582-244			
XLR Female	Phono Plug		739-0100	582-256			
XLR Female	Phono Socket		739-0110	582-268			
Attenuators							
XLR Female	XLR Male	10dB	739-0200	582-270			
XLR Female	XLR Male	20dB	739-0210	582-281			
XLR Female	XLR Male	30dB	739-0220	582-293			
Gender Changers							
XLR Female	XLR Female		739-0010	582-300			
XLR Male	XLR Male		739-0200	582-311			

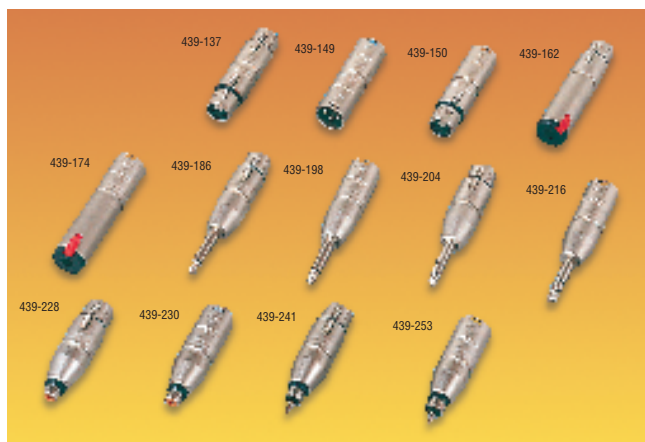XLR Adaptors
Nickel

CA026

Input	Output	Mfrs. List No.	Order Code	1+	10+	50+
XLR female	XLR female	NA3FF	.439-137			
XLR male	XLR male	NA3MM	.439-149			
XLR female	XLR male	NA3FM	.439-150			
XLR female	3 pole 1/4" jack	NA3FJ	.439-162			
XLR male	3 pole 1/4" jack	NA3MJ	.439-174			
XLR female	2 pole 1/4" plug	NA2FP	.439-186			
XLR male	2 pole 1/4" plug	NA2MP	.439-198			
XLR female	3 pole 1/4" plug	NA3FP	.439-204			
XLR male	3 pole 1/4" plug	NA3MP	.439-216			
XLR female	Phono jack	NA2FPMF	.439-228			
XLR male	Phono jack	NA2MPMF	.439-230			
XLR female	Phono plug	NA2FPMM	.439-241			
XLR male	Phono plug	NA2MPMM	.439-253			


Loudspeaker Connectors

DIN, High Quality



Plug Body size L = 27.5, Dia = 15.0	Elbow plug Body size H = 28.5, W = 15.0, D = 15.5 Cable entry = 6 3	Chassis socket H = 29.0, W = 17.6, D = 15.5
---	--	--

Two high quality speaker plugs with solid turned pins and screw terminations. A rear or front panel mounting socket is available with solder tab terminations. All manufactured in black plastic.



CA072

Order Multiple=2

Price Each

Order Code	2+	10+	50+	100+	500+
Plug	150-850				
Elbow plug	150-851				
Chassis socket	150-852				

Hi-Fi Connector System
Finger Proof to BS EN60065

- Fully insulated from accidental touch
- Single and double PCB mounting versions
- Cable mounts have multipole cable entry
- **UL94V-0** flammability rated
- -10 -80°C temperature range

TS Connector Line Socket

Housing	ABS, Dark Grey
Cap	ABS, Red or Black
Body & grub screw	Brass, Gold Plate
Max. Wire	10mm ²
Current rating	10 amp
Contact resistance	.30mΩ

TS PCB Chassis Socket

Housing	Acetal, Black or Red
Cap	Acetal, Black
Plug Pins	Brass, Gold Plate
Lanterns	Brass, Gold Plate
Current rating	10 amp
Contact resistance	.30mΩ
Withdrawal force	10N

FOR SUITABLE CABLE SEE SECTION 5

CA073

	Order Code	1+	10+	25+	50+	100+
Black Plug	450-017					
Red Plug	450-054					
Black Chassis Mount, Single	450-157					
Black Chassis Mount, Single	450-169					
Black Chassis Mount, Double	450-091					
Black Chassis Mount, Double	450-121					

30° Fork
0.5 micron

- Machined brass construction
- 0.5 micron gold plated
- Solder or crimp termination
- Accepts up to 4mm dia. wire
- Use with Deltron finger-proof audio terminals
- Sold as Red and Black pair

Overall length = 51, Dia. = 9.6

Housing	Acetal	Contacts	Brass, gold plated
---------	--------	----------	--------------------

FOR SUITABLE CRIMPING TOOL SEE 745-686 SECTION 9

CA074

Mfrs. List No.	Order Code	1+	5+	25+	50+	100+	250+
Red and Black Pair							
537-0000	662-150						