


Circular Multipole — Continued

Series 200

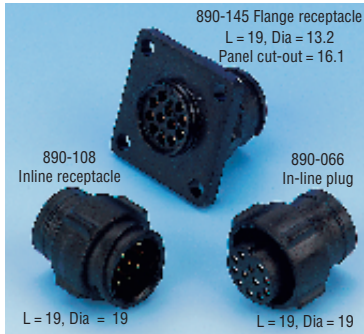

- Contact size 16 (2 way), 20 (5 & 7 way), 22 (12 way)

FOR SUITABLE CRIMP TOOL SEE PAGE 220

CM390

No. of Ways	Mftrs. List No.	Order Code	Price Each			
			1+	25+	100+	250+
Inline Plug						
2	IMC26-1602X	890-030				
5	IMC26-2005X	890-042				
7	IMC26-2007X	890-054				
12	IMC26-2212X	890-066				
Inline Receptacle						
2	IMC21-1602X	890-078				
5	IMC21-2005X	890-080				
7	IMC21-2007X	890-091				
12	IMC21-2212X	890-108				
Flange Receptacle						
2	IMC24-1602X	890-110				
5	IMC24-2005X	890-121				
7	IMC24-2007X	890-133				
12	IMC24-2212X	890-145				
Accessories						
Boot, PVC						
2.67mm	6810-201-2001-1-105	890-224				
3.05mm	6810-201-2001-1-120	890-248				
3.17mm	6810-201-2001-1-125	890-236				
3.56mm	6810-201-2001-1-140	890-250				
4.19mm	6810-201-2001-1-165	890-273				
6.35mm	6810-201-2001-1-250	890-261				
Pro-cap, plug	IMC28	890-303				
Pro-cap, receptacle	IMC29	890-315				
Adaptor	IMC2AD	890-339				

Contacts for 'IMC' Series



Socket Contact L = 13.36 max
Pin Contact L = 13.64 max

- Machined contacts, copper alloy with gold over nickel plating

Contact rating	5A, 750 Vrms (size 22) 7.5A, 1000 Vrms (Size 20) 13A, 1000 Vrms (Size 16)	Material	Copper alloy, gold over nickel plating
Wire gauge	22-26 AWG (Size 22) 20-24 AWG (Size 20) 16-20 AWG (Size 16)		

CM388

Order Multiple=10				Price Each	
Contact Size	Mftrs. List No.	Order Code	10+	100+	250+
Pins					
16	6860-201-16278	890-157			
20	6860-201-20278	890-169			
22	6860-201-22278	890-170			
Socket					
16	6862-201-16278	890-182			
20	6862-201-20278	890-194			
22	6862-201-22278	890-200			

Tooling



CM389

Contacts Size	Mftrs. List No.	Order Code	Price Each
Crimp Tools			
16, 20	AF8	890-376	1+
22	MH860	105-992	
Positioners			
16, 20	TH163	890-388	
Insertion/Extraction Tools			
16	6757-201-1601	890-340	
20	6757-201-2001	890-352	
22	6757-201-2201	890-364	

Metalok Bantam EMC Shielded System Crimp 4 to 48 Way, 13A



- Immediate EMC solution for new designs
- Instant retrofit for existing Metalok Bantam users, to meet EMC requirements
- 360 degrees electrical continuity for grounding
- Ease of assembly
- IP65 rating

Contact rating	See contact specs
Operating voltage	750Vr.m.s
Insulation resistance	5000 MΩ min
Operating temperature	-25°C to 125°C
Housing	(Body) Glass filled polyester UL94V-0 (Plating) Nickel plated to the outside of connector body and bayonet ring

CM387

Free Housing



CM351

No. of Ways	Shell Size	Mftrs. List No.	Order Code	1+	25+	50+	100+	500+
Pin Housing - Accepts Pin Contacts								
4	10	UTGS6PG104PN	748-456					
8	12	UTGS6PG128PN	748-468					
12	14	UTGS6PG1412PN	748-470					
19	16	UTGS6PG1619PN	748-481					
23	18	UTGS6PG1823PN	748-493					
28	20	UTGS6PG2028PN	748-500					
35	22	UTGS6PG2235PN	748-511					
48	24	UTGS6PG2448PN	748-523					
Socket Housing - Accepts Socket Contacts								
4	10	UTGS6PG104SN	748-535					
8	12	UTGS6PG128SN	748-547					
12	14	UTGS6PG1412SN	748-559					
19	16	UTGS6PG1619SN	748-560					
23	18	UTGS6PG1823SN	748-572					
28	20	UTGS6PG2028SN	748-584					
35	22	UTGS6PG2235SN	748-596					
48	24	UTGS6PG2448SN	748-602					

Panel Housing



CM353

ORDER CONTACTS SEPARATELY SEE PAGE 292