

Adaptors — Continued

International Power-Traveller®



561-307 2 round Pin Schuko plug to 3 pin 13A (UK) socket or 5A, 2 Pin shaver socket for use in: Austria, Belgium, Spain inc Majorca, Canaries, Portugal, Holland, Scandinavia, France, Germany, Switzerland, Luxembourg, Greece inc Corfu + Islands, Italy, Tunisia, Morocco, Yugoslavia, Bulgaria, Corsica, Denmark, Egypt, Finland, Hungary, Ibiza, India, Israel, Madeira, Maldives, Monaco, Norway, Poland, Rumania, Russia, Sardinia, Sicily, Turkey, Sweden.

561-319 2 Flat Pin Plug (angle adjustment on Pins), to 13A (UK) Socket or 5A, 2 Pin shaver socket for use in USA, Canada, Japan, Australia, New Zealand.

561-320 3 Square Pin, 13A (UK) Plug to fused European Schuko socket for use in: Great Britain, Cyprus, Gibraltar, Hong Kong, Singapore, Kenya, Malaysia, Sri Lanka, Malta, Qatar, Saudi Arabia, YAE, Yemen, Oman, Lebanon, Egypt, Dubai, Abu Dhabi, Bahrain, Bangladesh, Jordan, Kuwait, Bahamas, Belize, Guyana (50Hz), Botswana, Brunei, Gambia, Ghana, India, Jamaica, Malawi, Mauritius, Nigeria, Pakistan, Seychelles, Sierra Leone, South Africa, Zambia, Zimbabwe, Tanzania, Trinidad.

561-344 2 round Pin Schuko plug to flat 2 or 3 pin Australian/New Zealand socket for use in countries as 561-307

561-356 UK Shaver adaptor. 3 square pin 13A (UK) Plug to 1A fused 2 Pin (flat or round socket)

561-368 Multiplug (European, USA, Canada and Australia) to 3 square Pin UK socket. For Britons travelling abroad.

561-370 Multiplug (UK, European, USA and Australia) to fused 2 Pin European/USA/Australian socket for non UK residents travelling abroad.


561-381 Select-A-Plug. Worldwide adaptor between any of the plugs and sockets above. Integral 5A fuse protection.

CM181X


Plug	Socket	Mfrs. List No.	Order Code	Price Each		
				1+	5+	10+
Euro	UK	TCN01	.561-307			
USA/OZ	UK	TCN02	.561-319			
UK	Euro	TCN03	.561-320			
Euro	OZ	FIT21	.561-344			
UK	Shaver	7958	.561-356			
Multi	UK	TRA3	.561-368			
Multi	Euro	TRA4	.561-370			
Multi	Multi	TRA100	.561-381			

In-line Lead Connectors

Sealed IP68 6A

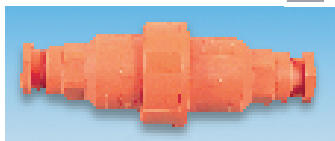

L = 105, Dia = 38

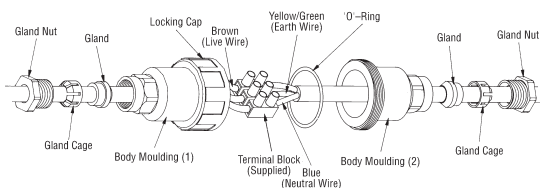

- Threaded coupling 'Buccaneer' style connector
- Ideal for extending or repairing 3 core circular mains plug
- Instructions supplied
- IP68 rated

Contact rating	6A @ 250V ac	Housing	Nylon, UL94-HB
Cable dia.	6.0-8.0	Terminal block	Natural polyethylene
Max. wire size	1.0mm ²	Temperature range	-20°C to +70°C

Mfrs. List No. PX0777 = 257-825, PX0777/OR = 469-646

Note: Always assemble two body mouldings prior to tightening the gland nuts. For correct sealing ensure all surfaces are free from contamination (dust, grease etc).

CM246X

Price Each						
Colour	Order Code	1+	25+	50+	100+	250+
Black	.257-825					
Orange	.469-646					

Aqua-Safe




- Superior sealing to IP68
- Fits cable from 5mm to 9mm diameter
- Easy bayonet fitting push and latch
- For pools, ponds, fountains, etc.
- Supplied with full assembly instructions

Maximum wire capacity	1.5mm ²	Waterproof to	IP68 2 bar
Maximum voltage	250V ac/dc	Complies with	BS6121 Pt2, BS5733, BS EN60529
Impulse withstand voltage	2kV	Operating temp.	-25°C to +90°C
Current rating	10A		

CM490

Price Each					
Aqua-Safe	Order Code	1+	10+	25+	50+
	.328-2879				

Sealed IP67 16A

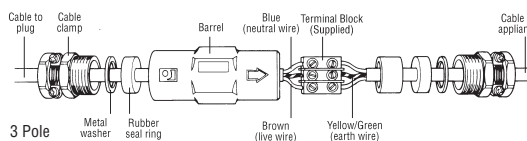

- Suitable for the extension and repair of 2, 3 and 5 core cables
- Use for AC or DC voltage
- IP67 protection
- Approvals include : SEMKO, DEMKO, NEMKO and SEV


Poles	Max. V	Dimensions			Cable dia. min. max.	Max. wire size (mm ²)	Mfrs. List No.	Order Code
		L	Dia.					
2	400	100	24	5	12.5	2.5	SK-2-2500	616-916
3	400	120	28	6	15.0	2.5	SK-3-2500	179-555
5	400	150	35	10	19.0	2.5	SK-5-2500	616-928

Housing Black nylon 6.6 Temperature range -20°C to +66°C

CM13

Price Each					
Order Code	1+	5+	10+	25+	50+
.616-916					
.179-555					
.616-928					

2 and 3 Pole 10A

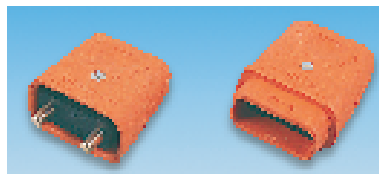

- Ideal for the extension of leads on electrical appliances
- 2 pin version for use with Class 2 double insulated appliances
- 3 pin must be used with earthed appliances

Contact rating	10A @ (250V ac)	Housing	Moulded rubber sleeves
Contacts	Brass (screw termination)	Inserts	Polypropylene

Warning: The two pin versions are non-polarised and are therefore not suitable for DC or any application where live/neutral should not be transposed.

Mfrs. List No. LCP1020 = 313-518, LCP103W = 313-520, LCP103B = 313-531

CM12