

	Mfrs. List No.	Order Code	1+	50+	100+	250+
Double Pole						
Non illuminated	BZM27/Z0000/57B	561-186				
Red illuminated	BZM27/Z0000/59B	561-198				
Green illuminated	BZM27/Z0000/63B	561-216				

Polyflange IEC Inlets**Switched and Fused Polyflange Combinations**

- Flange mounted switched and fused IEC inlets
- Fuse drawer protected to **PC2, IEC 127/6**
- Approvals: **UL, CSA, VDE, IMQ, SEMKO**

New

Vertical Flange
H(SP) = 67.5, H(DP) = 81.5, W = 36.0
Cut Out: H(SP) = 53.2, H(DP) = 66.3,
W = 33.0

Horizontal Flange
H(SP) = 59.0, H(DP) = 72.3, W = 49.3
Cut Out: H(SP) = 53.2, H(DP) = 66.3
W = 33.0

Current Rating 10A, 250V Fuseholder 5 x 20mm

CM500

	Mfrs. List No.	Order Code	1+	50+	100+	250+
Vertical Flange						
SP Non illuminated	BVA01/Z0000/01	313-6152				
SP Red illuminated	BVA01/Z0000/02	313-6164				
DP Non illuminated	BVA01/Z0000/10	313-6176				
DP Red illuminated	BVA01/Z0000/11	313-6188				
Horizontal Flange						
SP Non illuminated	BVB01/Z0000/01	313-6190				
SP Red illuminated	BVB01/Z0000/02	313-6206				
DP Non illuminated	BVB01/Z0000/10	313-6218				
DP Red illuminated	BVB01/Z0000/11	313-6220				

Switched and Fused Inlets

Cut-out 'A'
Switched or fused/voltage selector or twin fused
151-746, 150-030, 150-032
Panel cut-out H = 48.4,
W = 34.4, Thickness = 1.5 to 3
Depth behind panel = 38

Cut-out 'B'
Single fuse switched
148-329, 150-031
Panel cut-out H = 56.6,
W = 34.4, Thickness = 1.5 to 3
Depth behind panel = 25.4z

Cut-out 'C'
Twin fused switched
151-747, 148-330, 150-029
Panel cut-out H = 76.5,
W = 34.4, Thickness = 1.5 to 3
Depth behind panel = 38

- Snap-fit, panel mount combination, fused inlet sockets
- Each item individually terminated for flexibility of interconnection
- Twin DPST switched fuse version allows switching and fusing of live and neutral
- Manufactured to **IEC320/CEE22** and **BS4491**
- Fuse drawer/fuseholder protected to **PC2, IEC127/6**
- Approvals: **UL, CSA, VDE** and **SEMKO**

Overall current rating 10A @ 250V ac
Housing Black nylon
Terminations 6.35 0.8mm
2.8 0.5mm

Mfrs. List No.

BZV03/Z0000/01 = 151-746, BZV03/Z0000/14 = 150-030, BZV03/Z0000/04 = 150-032
BZV01/Z0000/02 = 148-329, BZV01/Z0000/01 = 150-031, BZV03/Z0000/05 = 151-747,
BZV03/Z0000/06 = 148-330, BZV03/Z0000/09 = 150-029


FOR FILTERED VERSIONS SEE **PAGE 413**

CM55X

	Switch	Fuse	Neon	Order Code	1+	50+	100+	250+	1000+
Style 'A'									
Switched									
SPST	—	—	—	151-746					
Fused/Voltage Selector									
120/240V Single	—	—	—	150-030					
Twin Fused									
— Twin	—	—	—	150-032					

continued

	Switch	Fuse	Neon	Order Code	1+	50+	100+	250+	1000+
Style 'B'									
Single Fused Switched									
SPST Single Red				148-329					
SPST Single —				150-031					
Style 'C'									
Twin Fused Switched									
DPST Twin —				151-747					
DPST Twin Red				148-330					
DPST Twin Green				150-029					

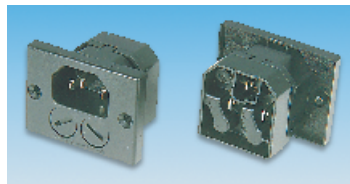
Switched and Fused Inlet
Voltage selection

- Fused and switched inlet, with voltage selection, 240/120 Vac
- Suitable for panel thickness, 1, 1.5, 2 & 3mm
- Fuseholder protected to **PC2, IEC127/6**
- Approvals, **VDE, SEMKO**, and **CSA**


Current rating 10A @250Vac
Contacts Brass, nickel plated
Housing Black Nylon
Fuseholder 20 5mm
Mfrs. List No. BZV03/Z0000/15

CM427

	Order Code	1+	50+	100+	250+	500+	1000+
	964-566						

Twin Fused Inlet – Panel Mounting

H = 37, W = 50, D = 33 (behind panel 26.5)



Panel cut-out

- Double fused inlet, wired to provide fusing of live and neutral
- Approvals: **UL, CSA, SEV, SEMKO** and **VDE**

Current rating 6A @ 250V ac
Temperature range -40°C to +65°C
Housing Black/grey thermoplastic
Contacts Brass, nickel plated
Fuseholders 20 5mm
Terminations 4.8 0.8mm fast-on

Mfrs. List No. 0040-5000-2

CM56

	Order Code	1+	25+	50+	100+	250+	500+
	150-645						

Flange Fixing 16A

- **IEC 320 C20** chassis plug
- 6.3mm blade terminals on rear for push on receptacles or soldering
- Approvals **VDE, CSA, UL**

Current rating 16A
Voltage 250Vac
Housing PBT
Contacts Brass to **BS2870**, bright nickel electro-tin plating
Termination 6.3 0.8mm

FOR MATING CONNECTOR SEE **PAGE 403**

CM477

	Mfrs. List No.	Order Code	1+	50+	100+	250+	500+
	R4506000	360-429					

continued

Linear Dimensions

All linear dimensions appear in (mm)
unless otherwise stated.