

Mfrs. List No.	Max. Panel	Order Code	1+	10+	50+	100+	250+	500+
Silver Plated Bodies and Contacts Plug								
50Ω		309-461†						
Bulkhead								
50Ω					Mfrs. List No. B35M(♦♦)X99			
(27E001)	4 ST	309-357†						
(08E999)	7.4 PS	309-369†						
(13E999)	9.2	309-370†						
75Ω								
(27E001)	4 ST	309-400†			Mfrs. List No. B37M(♦♦)X99			
Panel								
50Ω	—	Mfrs. List No. 50Ω – B35K07E999H99, 75Ω – B37K07E999H99						
75Ω	—	309-485†						
		309-497†						
Nickel Plated Bodies Gold Plated Centre Contacts								
Bulkhead								
50Ω	4	Mfrs. List No. 50Ω – 1-310704-1, 75Ω – 1-310804-1						
75Ω	4	307-0440						
		307-0463						
Panel								
50Ω	—	Mfrs. List No. 50Ω – 135-34-000.						
		143-779†						

♦♦ add code from 1st column, e.g. 27E999.
Panel thickness suffix: ST = Solder tag. PS = Panel seal.
†Available until stocks are exhausted

Insulated Bulkhead Connector 75Ω





- Nickel body
- Gold plated centre contact



Mfrs. List No.	Order Code	1+	10+	25+	100+	250+	500+
Adaptor UBJ28	356-2920						

Insulated Bulkhead Connectors 50Ω and 75Ω





Bright nickel plated body with white insulating bush and gold plated centre contact.

FOR BNC PATH PANELS SEE **PAGE 448**

	Order Code	1+	10+	50+	150+	250+	500+
Sockets							
50Ω	583-522						
Adaptor							
50Ω	583-534						
75Ω	583-546						

Insulated Bulkhead Connectors 50Ω and 75Ω

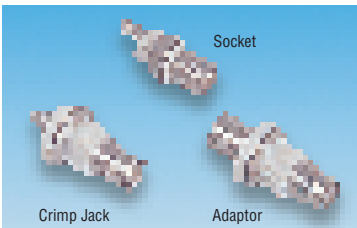

- Bright nickel plated body with white integral insulating bush

FOR SUITABLE CRIMP TOOL SEE **PAGE 453**


Mfrs. List No.	B35M46H999X99 = 309-450, B35H51J010X99 = 152-318, B37R50J999X99 = 290-919	B37M46H999X99 = 151-841, B35R50J999X99 = 152-319,
----------------	---	--

	Order Code	1+	10+	50+	150+	250+	500+
Sockets							
50Ω	.309-450 †						
75Ω	.151-841 †						
Crimp Jack Cable RG58 Group 010							
50Ω	152-318 †						
Adaptor							
50Ω	152-319 †						
75Ω	290-919 †						

†Available until stocks are exhausted

'Twist On' BNC Series

'Screw On' BNC connectors ideally suited to field installers where assembly time is at a premium. Can be terminated with practice in less than one minute.

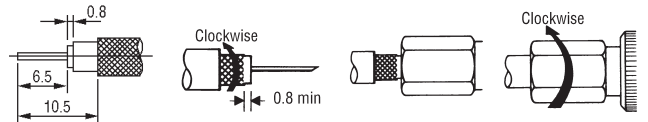

Working voltage	500V RMS @ sea level	Housing:	Nickel plated brass
Contact resistance:	Centre 1.5mΩ	Contacts:	Brass
Outer	0.5mΩ	Insulators:	Delrin
Insulation resistance	5000MΩ		
Breakdown voltage	1500V RMS @ sea level		

BNC Plugs Bulkhead and Straight Jacks 50Ω and 75Ω





L = 35, Dia. = 14.4 L = 36.5, Dia = 11.1 L = 36.5, Dia. = 17

Plug	Impedance	Suitable Cable	Group	Order Code
Plug	50Ω	RG58BU, UR43, 76, BT2002	010/117	105-545
	75Ω	RG59BU, 62AU, PSF1/3M	A25/366	105-546
	75Ω	UR203; PSF1/2M	028/007	251-100
Straight	50Ω	RG58BU, UR43, 76, BT2002	010/117	105-549
	75Ω	RG59BU, 62AU; PSF1/3M	A25/366	105-550
Bulkhead	50Ω	RG58BU, UR43, 76, BT2002	010/117	105-547
	75Ω	RG59BU, 62AU; PSF1/3M	A25/366	105-548


Plug	Order Code	1+	10+	50+	150+	250+	500+
50Ω	.105-545						
75Ω	.105-546						
75Ω	251-100						
Straight Jack							
50Ω	.105-549						
75Ω	.105-550						
Bulkhead Jack							
50Ω	.105-547						
75Ω	.105-548						

PCB Mounting BNC Jacks

PCB Socket 50Ω

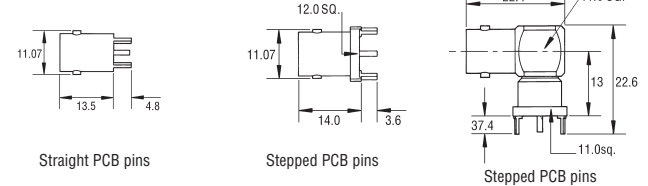

Straight PCB drilling patterns



Stepped PCB drilling patterns