


No. of Ways	Order Code	Price Each					
		1+	25+	100+	250+	500+	1000+
'D' Shell and Slidlock							
9	150-768						
15	150-769						
25	150-770						
37	150-771						
		Price Per Pack					
		1+	10+	25+	50+		
Latches (5 Pairs Per Pack)							
	150-772.						

Metalised Plastic Metal Plated Plastic Shield Hoods



- For HDP20 and HDE20 metal shell connectors

Housing Thermoplastic nickel plated over copper
4-40 screws Steel, zinc plated
Jackscrews Steel, zinc plated clear chromate

CS527

Metalised Plastic

ITT Cannon



Top entry
Shell depth = 16

50° entry
Shell depth = 16

The shell consists of two halves which easily snap together. The metalised finish gives protection from EMI/RFI interference.

Housing ABS Polymer Coating Nickel over copper

Mfrs. List No.		Top Entry	50° Entry
	9 way DE-121073-	154	54
	15 way DA-121073-	150	50
	25 way DB-121073-	151	51
	37 way DC-121073-	152	52
	50 way DD0121073-	—	53

CS91

No. of Ways	H	Order Code	Price Each					
			1+	10+	50+	100+	250+	500+
Top Entry								
9	36.0	105-529						
15	42.0	105-530						
25	42.0	105-531						
37	42.0	105-532						
50° Entry								
9	36.0	105-533						
15	42.0	105-534						
25	42.0	105-535						
37	42.0	105-536						
50	42.0	892-397						
Male Screwlock								
		Recessed slotted	105-852					
		Finger jackscrew	105-851					

Metalised Plastic Straight and 45° Cable Entry



- ABS with nickel over copper plating
- EMC/RFI shielding braid/foil folded back over suitable size strain relief bush
- Range of 5 strain relief bushes per hood
- Accepts foil, lap or braided cable
- No tooling required for shield termination

Best value

Shell Dimensions	Straight	H	W	D	Cable Entry via 5 Bushes
		45°	Both	Both	
9 way	35.5	37.2	31.1	16.3	5 - 7.5
15 way	38.8	40.6	39.1	16.3	5 - 8
25 way	42.0	44.1	53.1	18.0	5 - 8
37 way	46.5	45.7	69.3	23.0	8 - 15

CS351

No. of Ways	Straight Entry Order Code	45 Entry Order Code	Price Each				
			1+	10+	50+	100+	250+
9	746-058	746-060					
15	746-071	746-083					
25	746-095	746-101					
37	746-113	746-125					

Metalised Plastic Straight and 45° Cable Entry




- Low profile 45° design
- Turned, full metal 4-40 thumb screws
- Plastic strain relief inserts for cable sizes 3.5mm to 13mm
- ABS with nickel over copper plating
- No tooling required for shielded termination

Mfrs. List No. MHD45PKx-K = 45° Hood, MHDTPKx-K = Top Entry Hood, Where x = No of Ways

CS510

No. of Ways	45° Entry Order Code	Top Entry Order Code	Price Each				
			1+	10+	50+	100+	250+
9	357-649	357-728					
15	357-662	357-765					
25	357-698	357-911					
37	357-704	357-984					

Metalized Plastic EMI Junction Shell

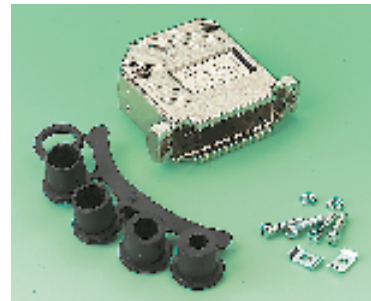

- Easy assemble
- Lightweight, compact design
- Supplied with hardware on 4-40 UNC thread, 2 Jackscrews, 2 Saddle washers and 2 nuts
- No tooling required for shielding

Material ABS Plating Nickel over Copper

CS533

No. of Ways	Mfrs. List No.	Order Code	Price Each					
			1+	10+	50+	100+	300+	500+
9	3357-6509	300-0114						
15	3357-6515	300-0126						
25	3357-6525	300-0138						
37	3357-6537	300-0140						

continued