


SCSI 2 Connectors — Continued

Ribbon Cable 0.025" Pitch

HARTING

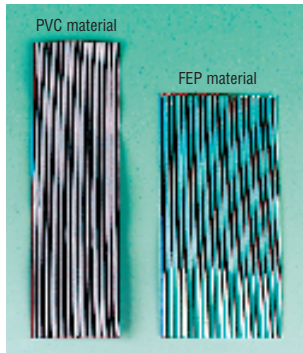

- PVC and FEP material
- UL approved

FEP material – 90 Ohm single ended, 130 Ohm differential impedance for full SCSI bus performance.

CS452

No. of Ways	Mfrs. List No.	Order Code	Price Each
30.48m Reel			
68 (PVC material)	60900686008	965-560	
68 (FEP material)	60900686007	965-571	

Terminators

HARTING



- Single ended and differential
- SCSI2 fast, latch mating
- SCSI3, 2-56 UNC jack screw mating


965-625
H = 12, W = 65.41,
D = 23.75 (mated)

CS453

	Mfrs. List No.	Order Code	Price Each				
			1+	10+	50+	100+	250+
50 way SCSI2 Fast Terminators							
Single ended passive	60030501001	965-583					
Single ended active	60030501002	965-595					
Differential	60030501003	965-601					
68 way SCSI3 Terminator							
Differential	60030681004	965-613					
Single ended active	60030681005	965-625					

High Density PCB Mount I/O Bellows Contact

HARTING

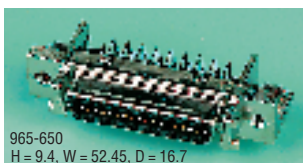

965-650
H = 9.4, W = 52.45, D = 16.7

- Har-mik bellows offer good EMI/RFI characteristics
- 'D' shaped polarization
- 36 way complies with IEEE 1284-C specification
- Integral board lock
- UL approved


Contact rating	1A	Moulding	Thermoplastic resin UL94V-0
Temperature range	-55°C to +105°C	Shell	Die cast Zamac nickel plated
		Contacts	Copper alloy, gold over palladium/nickel plating

CS454

No. of Ways	Mfrs. List No.	Order Code	1+	10+	50+	100+	250+
90° PCB Sockets – with latches							
26	60110265140	965-637					
36	60110365140	965-649					
50	60110505140	965-650					

Tooling

HARTING

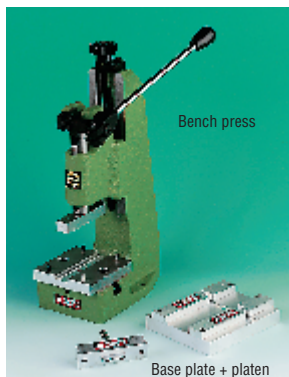

- Bench press and base plate for PVC and FEP cable termination
- Hand tool for PVC cable only

CS455


	Mfrs. List No.	Order Code	Price Each
Bench Press	0990000114	965-662	1+
Base Plate + Platen	60990000034	965-674	
Hand Tool		964-128.	
Hand Tool Cable Aligner & Die Set			
PVC Cable	66900000007	965-686	

90° PCB Sockets, 50 and 68 Way

FUJITSU



H = 10.5, W = 52.45 (50 way), 63.88 (68 way), D = 17.3

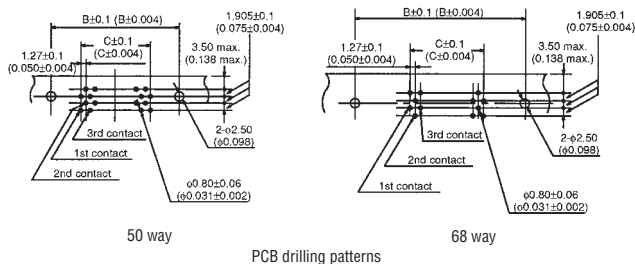

High density 90° PCB mounting 50 or 68 way sockets conforming to ANSI specifications for SCSI2.

Contact rating	1A dc	Housing	Steel, nickel plated
Contact resistance	30mΩ max. @ 6V dc 0.1A	Insulator	Black polyester, UL94V-0
Voltage rating	240V ac	Contacts	Copper alloy, gold over palladium plated
Temperature range	-55°C to +105°C		

CS290

No. of Ways	Mfrs. List No.	Order Code	1+	25+	100+	250+	500+
50 way	FCN-235D050-G/E	439-368					
68 way	FCN-235D068-G/E	439-370					

90° PCB Sockets, 26, 50 and 68 Way

tyco Electronics

