


FOR CODING KEY SEE PAGE 492

CS509

Mftrs. List No.	Order Code	1+	100+	250+	500+	1000+
352332-1	<b>487-946</b>					
188835-1	<b>487-958</b>					
352033-1	<b>487-960</b>					
188834-1	<b>487-971</b>					
352068-1	<b>487-983</b>					
352152-1	<b>487-995</b>					
352171-1	<b>488-008</b>					

## Har. bus HM 2.0mm

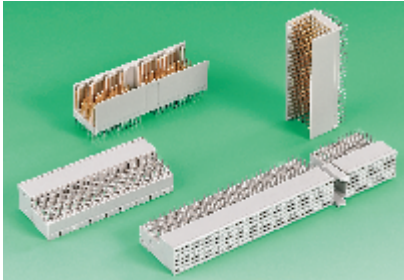

335-4763 335-4830 335-4568 335-4600



- Specified for Compact PCI/VME bus
- Complies with **IEC 61076-4-101**
- Pre-leading contacts
- Pre-installed upper shields on the sockets
- Specific colour code keys for board insertion identification
- 32/64 Bit Transfer Rate



Test Voltage	750 Vrms	Housing	Thermoplastic resin, glass-fibre filled <b>UL94V-0</b>
Current rating	1.5 Adc (signal)	Contacts	Copper alloy, gold plated
Contact resistance	20mΩ (max)	Press in force	100N/pin (max)
Temperature range	-55°C to +125°C	Retention force	20N/pin (min)
Mating cycles	400		

CS575

No. of Ways Type	Mftrs. List No.	Order Code	1+	10+	100+	250+	500+
<b>Straight Plug</b>							
110 A	1701 110 2201	<b>335-4556</b>					
154 A	1701 154 2201	<b>335-4568</b>					
154 A CPCI	1701 154 2203	<b>335-4581</b>					
95 B	1705 095 2201	<b>335-4623</b>					
110 B	1704 110 2201	<b>335-4611</b>					
125 B	1702 125 2201	<b>335-4593</b>					
133 B	1705 133 2201	<b>335-4635</b>					
154 B CPCI	1704 154 2203	<b>335-4600</b>					
55 C	1703 055 2201	<b>335-4659</b>					
220 47 Monobloc	1706 220 2201	<b>335-4660</b>					
308 47 Monobloc CPCI	1706 308 2201	<b>335-4672</b>					
<b>90° C Sockets</b>							
110 A	1721 110 2101	<b>335-4684</b>					
110 With upper shield	1721 110 2102	<b>335-4751</b>					
95 B	1725 095 2101	<b>335-4787</b>					
95 With upper shield	1725 095 2102	<b>335-4799</b>					
110 B	1724 110 2101	<b>335-4805</b>					
110 With upper shield	1724 110 2102	<b>335-4817</b>					
125 B	1722 125 2101	<b>335-4763</b>					
125 With upper shield	1722 125 2102	<b>335-4775</b>					
55 C	1723 055 2101	<b>335-4829</b>					
220 47 Monobloc	1726 220 2101	<b>335-4830</b>					
220 With Upper shield	1726 220 2102	<b>335-4842</b>					
<b>Code Keys - Straight Plug</b>							
Cadmium Yellow	1779 000 0013	<b>335-4854</b>					
Reseda Green	1779 000 0014	<b>335-4866</b>					
Brilliant Blue	1779 000 0015	<b>335-4878</b>					
<b>Code Keys - 90° Sockets</b>							
Cadmium Yellow	1779 000 0023	<b>335-4880</b>					
Reseda Green	1779 000 0024	<b>335-4891</b>					
Brilliant Blue	1779 000 0025	<b>335-4908</b>					

## Metral


- Modular high density, 2mm interconnect system
- Flexibility of design
- Ideal for Futurebus+ and SCI (IEEE P1596) users
- Stackable end to end, without loss of poles
- Solder to board and press fit versions
- 4 and 5 row versions



Current rating	1A (signal) 3A (power)	Housing Contracts	Liquid crystal polymer (LCP), <b>UL94V-0</b> Phosphor bronze, gold plated (in contact over)
Withstand voltage	1K Vrms (@sea level)		

CS469


## Solder to Board Plugs and Sockets, 4 Row Class II

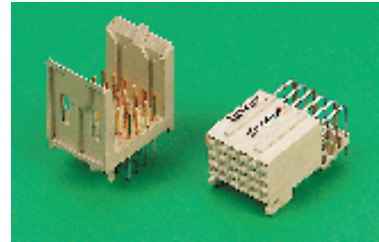

CS468

No. of Ways	Tail Length (mm)	Mftrs. List No.	Order Code	1+	10+	50+	100+	250+
<b>Straight PCB Pins</b>								
24 (4 6)	4.25	88951-101	<b>633-926</b>					
24 (4 6)	3.45	88951-131	<b>633-938</b>					
24 (4 6)	2.65	88951-161	<b>633-940</b>					
48 (4 12)	3.45	88952-131	<b>633-951</b>					
48 (4 12)	2.65	88952-161	<b>633-963</b>					
96 (4 24)	3.45	88953-131	<b>633-975</b>					
96 (4 24)	2.65	88953-161	<b>633-987</b>					
192 (4 48)	3.45	88954-131	<b>633-999</b>					
192 (4 48)	2.65	88954-161	<b>634-001</b>					
<b>90° PCB Sockets</b>								
24 (4 6)	2.73	89035-101	<b>634-013</b>					
24 (4 6)	3.53	89035-111	<b>634-025</b>					
48 (4 12)	2.76	89036-101	<b>634-037</b>					
48 (4 12)	3.53	89036-111	<b>634-049</b>					
96 (4 24)	2.73	89037-101	<b>634-050</b>					
96 (4 24)	3.53	89037-111	<b>634-062</b>					
192 (4 48)	2.73	89038-101	<b>634-074</b>					
192 (4 48)	3.53	89038-111	<b>634-086</b>					


## Power Modules, 4 Row

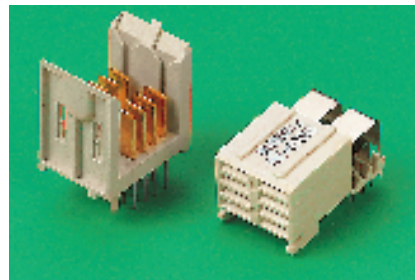

CS467

No. of Ways	Tail Length (mm)	Mftrs. List No.	Order Code	1+	10+	50+	100+	250+
<b>Straight PCB Pins</b>								
8 (4 2)	4.25	88960-101	<b>634-116</b>					
8 (4 2)	3.45	88960-131	<b>634-128</b>					
8 (4 2)	2.65	88960-161	<b>634-130</b>					
<b>90° C PCB Sockets</b>								
8 (4 2)	2.73	89039-101	<b>634-098</b>					
8 (4 2)	3.53	89039-111	<b>634-104</b>					

## Press Fit Power Modules, 4 Row Class II



CS465

No. of Pins	Tail Length (mm)	Mftrs. List No.	Order Code	1+	10+	50+	100+	250+
<b>Straight PCB Pins</b>								
8 (4 2)	4.3	70236-101	<b>634-220</b>					
8 (4 2)	4.3	70236-103	<b>634-232</b>					
8 (4 2)	13.6	70236-121	<b>634-244</b>					

continued