

2.0mm Backpanel Systems — Continued


Press Fit Plugs, 4 Row Class II



CS466

No. of Ways	Tail Length (mm)	Mftrs. List No.	Order Code	Price Each				
				1+	10+	50+	100+	250+
Straight PCB Pins								
24 (4 6)	4.30	70232-111	634-141					
24 (4 6)	13.60	70232-121	634-153					
48 (4 12)	4.30	70233-111	634-165					
48 (4 12)	13.60	70233-121	634-177					
96 (4 24)	4.30	70234-111	634-189					
96 (4 24)	13.60	70234-121	634-190					
192 (4 48)	4.30	70235-111	634-207					
192 (4 48)	13.60	70235-121	634-219					


Press Fit Plugs and Solder to Board Sockets 5 Row

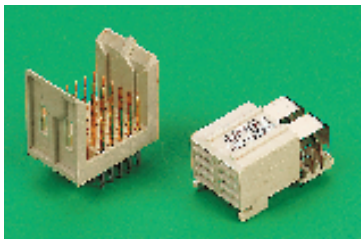

CS464

No. of Ways	Tail Length (mm)	Mftrs. List No.	Order Code	Price Each				
				1+	10+	50+	100+	250+
Straight PCB Pins - Press Fit								
30 (5 6)	4.30	89006-111	634-256					
30 (5 6)		89006-115	634-268					
60 (5 12)	13.60	89006-121	634-270					
60 (5 12)	4.30	89007-111	634-293					
60 (5 12)	13.60	89007-121	634-300					
120 (5 24)		89008-111	634-311					
120 (5 24)		89008-121	634-335					
240 (5 48)	4.30	89009-111	634-347					
240 (5 48)		89009-115	634-359					
240 (5 48)	13.60	89009-121	634-360					
90° PCB Sockets - Solder to Board								
30 (5 6)	3.53	85863-112	634-372					
60 (5 12)	3.53	85864-112	634-384					
120 (5 24)	3.53	85865-112	634-396					
240 (5 48)	3.53	85866-112	634-402					


Press Fit and Solder to Board Power Modules 5 Row



CS463

No. of Ways	Tail Length (mm)	Mftrs. List No.	Order Code	Price Each				
				1+	10+	50+	100+	250+
Straight PCB Pin – Press Fit								
30 (5 6)	4.30	89009-112	634-426					
90° PCB Socket - Solder to Board								
30 (5 6)	2.73	85876-112	634-414					

Shrouds, 4 & 5 Row



CS462

No. of Ways	Mftrs. List No.	Order Code	Price Each				
			1+	10+	50+	100+	250+
4 Row							
24 (4 6)	70203-111	634-438					
192 (4 48)	70203-114	634-440					
5 Row							
30 (5 6)	89055-111	634-475					
240 (5 48)	89055-114	634-487					

Millipacs 2



- Millipacs 2 is a standard 2.0mm interconnection system designed in accordance with **IEC917 (DIN43355)** and **IEC1076-4-101**
- Meets need for high speed and high density signal conditioning
- Modular system 'building blocks'
- Basic module type A includes MPSC (multipurpose service centre) for polarisation coding and alignment
- Connectors are press fit technology
- 55, 110 and 125 ways

Current rating 1A Housing to **UL94V-0**
 Test voltage 750V rms Contacts Phosphor bronze plated gold over nickel
 Temperature range -55 to 125°C

Mftrs. List No: HM2R01PA5100N9 = 307-7720, HM2R02PA5100N9 = 307-7731,
 HM2R03PA5100N9 = 307-7743, HM2P07PD5110N9 = 307-7755,
 HM2P08PD5110N9 = 307-7767, HM2P09PD5110N9 = 307-7779,
 HM2DK1567PUK = 307-7780, HM2DK2348RUK = 307-7792,
 HM2DK3456PUK = 307-7810, HM2DK3456PUK = 307-7809,
 HM2DK1278RUK = 307-7810, PAY24A5 = 307-7822,
 PAY245A20 = 307-7834, PAY245A21 = 307-7846,
 PAY245A22 = 307-7858, PAY245A3 = 307-7860,
 PAY245A8 = 307-7871, PAY245M = 307-7883

CS564

	Order Code	Price Each				
		1+	10+	25+	50+	100+
110 way socket type A	307-7720					
125 way socket type B	307-7731					
55 way socket type C	307-7743					
110 way plug type A	307-7755					
125 way plug type B	307-7767					
55 way plug type C	307-7779					
Male coding key blue	307-7780					
Female coding key blue	307-7792					
Male coding key yellow	307-7809					
Female coding key yellow	307-7810					
Tooling		1+				
Plug lower anvil ABC	307-7822					
Skt type A insertion tool	307-7834					
Skt type B insertion tool	307-7846					
Skt type C insertion tool	307-7858					
Skt lower anvil ABC	307-7860					
Male lower anvil ABC	307-7871					
Bench Press	307-7883					