


T433

	Order Code	1+	10+	50+
Micro SMD Clip 1	<b>859-047</b>			

### Miniature

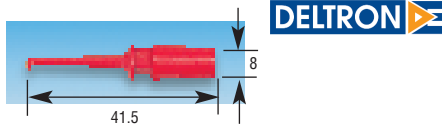


A plunger action miniature hooked test probe with gold plated contacts, solder connections. Working voltage 50V ac.

Mftrs. List No. 575+Colour

T62

Colour	Order Code	1+	10+	50+	100+
Red	<b>.147-007</b>				
Black	<b>.147-022</b>				
Blue	<b>.147-023</b>				
Green	<b>.147-024</b>				
Yellow	<b>.147-025</b>				

### Miniature

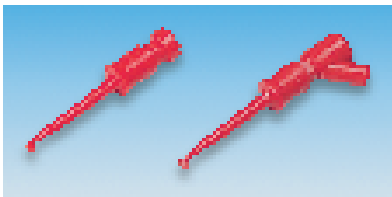

523-525 Solder L = 61  
523-549 2mm Plug L = 69.5


Miniature plunger action test hooks with gold plated hook. Two types are available for either solder or 2mm pin connection at side. Working voltage 50V.

Mftrs. List No. KLEPS 2 + Colour (Solder), KLEPS 2 BU + Colour (Plug)

T247

	Order Code	1+	10+	50+
<b>Solder</b>				
Red	<b>523-525</b>			
Black	<b>523-537</b>			
<b>Plug</b>				
Red	<b>523-549</b>			
Black	<b>523-550</b>			

### Miniature



Pin L = 52  
2 x Pins L = 52

Miniature test hooks with revolving clip-on gripper. Suitable for extremely thin wires and densely packed circuits and contacts such as ICs. Can clamp diameters up to 3.5mm. Three types available with gold plated 1mm diameter socket, single or double 0.64mm diameter pin. Working voltage 50V.

Mftrs. List No. KLEPS 3 +Colour (Socket), KLEPS 3 ST Colour (Single Pin), KLEPS 4 + Colour (Double Pin)

T251

	Order Code	1+	10+	50+
<b>Single Pin</b>				
Red	<b>523-446</b>			
Black	<b>523-458</b>			
<b>Double Pin</b>				
Red	<b>523-460</b>			
Black	<b>523-471</b>			

### Micro



L = 53.8

Micro-miniature test hook with revolving clip-on gripper. Designs for extremely thin wires, especially SMD technology and densely packed circuits and contacts such as ICs with a conductor spacing of 1.27mm. The powder-coated shaft can be bent to 35° and can clamp diameters up to 2.5mm. Two connections via gold-plated 0.64mm diameter pins. Working voltage 50V. Current 2A.

Mftrs. List No. MICRO-KLEPS + Colour

T249

Colour	Order Code	1+	10+	50+
Red	<b>523-409</b>			
Black	<b>523-410</b>			

### Safety Shrouded 2mm



Plug L = 39.5 Dia = 6.0

- Fully shrouded
- Gold plated contact
- Flexible P.V.C test lead
- IEC 1010-2-031 compliant


MC

Working Voltage 600V CAT II maximum current 10A cable 0.5mm<sup>2</sup>.

T324

Length	Colour	Mftrs List No	Order Code	1+	10+	25+	50+
300mm	Black	65.9173-030-21	<b>746-599</b>				
300mm	Red	65.9173-030-22	<b>746-605</b>				
600mm	Black	65.9173.060-21	<b>746-617</b>				
600mm	Red	65.9173-060-22	<b>746-629</b>				
1000mm	Black	65.9173-100-21	<b>746-630</b>				
1000mm	Red	65.9173-100-22	<b>746-642</b>				

### Stackable 2mm Shrouded

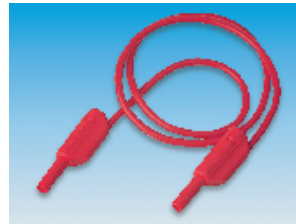

Plug L = 36.2 W = 7.6 H = 11.3

- Fully shrouded 2mm plugs & sockets
- Stackable plugs with gold contacts
- Flexible PVC test lead
- IEC-1010-2-031 compliant


MC

Working voltage 600V Cat II maximum current 10A cable 0.5mm<sup>2</sup>.

T349

Length	Colour	Mftrs. List No.	Order Code	1+	10+	25+	50+
300mm	Black	65.9179-030-21	<b>746-538</b>				
300mm	Red	65.9179-030-22	<b>746-540</b>				
600mm	Black	65.9179-060-21	<b>746-551</b>				
600mm	Red	65-9179-060-22	<b>746-563</b>				
1000mm	Black	65.9179-100-21	<b>746-575</b>				
1000mm	Red	65.9179-100-22	<b>746-587</b>				

### Safety 2mm Socket Connection

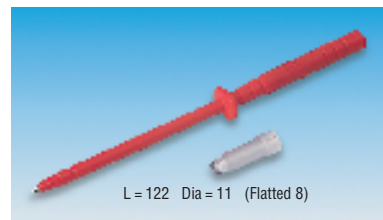

L = 122 Dia = 11 (Flatted 8)

- High grade steel tip
- Safety cap to prevent injury
- Non slip cap prevents shorting on IC pin contacts
- IEC 1010-2-031 compliant
- Handle guard flatted to prevent rolling

MC

Working voltage 1000V CAT II

T342

Colour	Mftrs. List No.	Order Code	1+	10+	25+	50+
Black	24.0239-21	<b>746-691</b>				
Red	24.0239-22	<b>746-708</b>				

continued