

TECHNICAL HOTLINE +44 (0)1268 563720

INGRESS PROTECTED

650262.

SWITCHSOCKET OUTLETS

SOCKET OUTLETS

CONNECTION UNIT


13 AMP
IP56

RCD PROTECTED
13 AMP
IP56

13 AMP
IP56

16 AMP
IP56

13 AMP
IP56

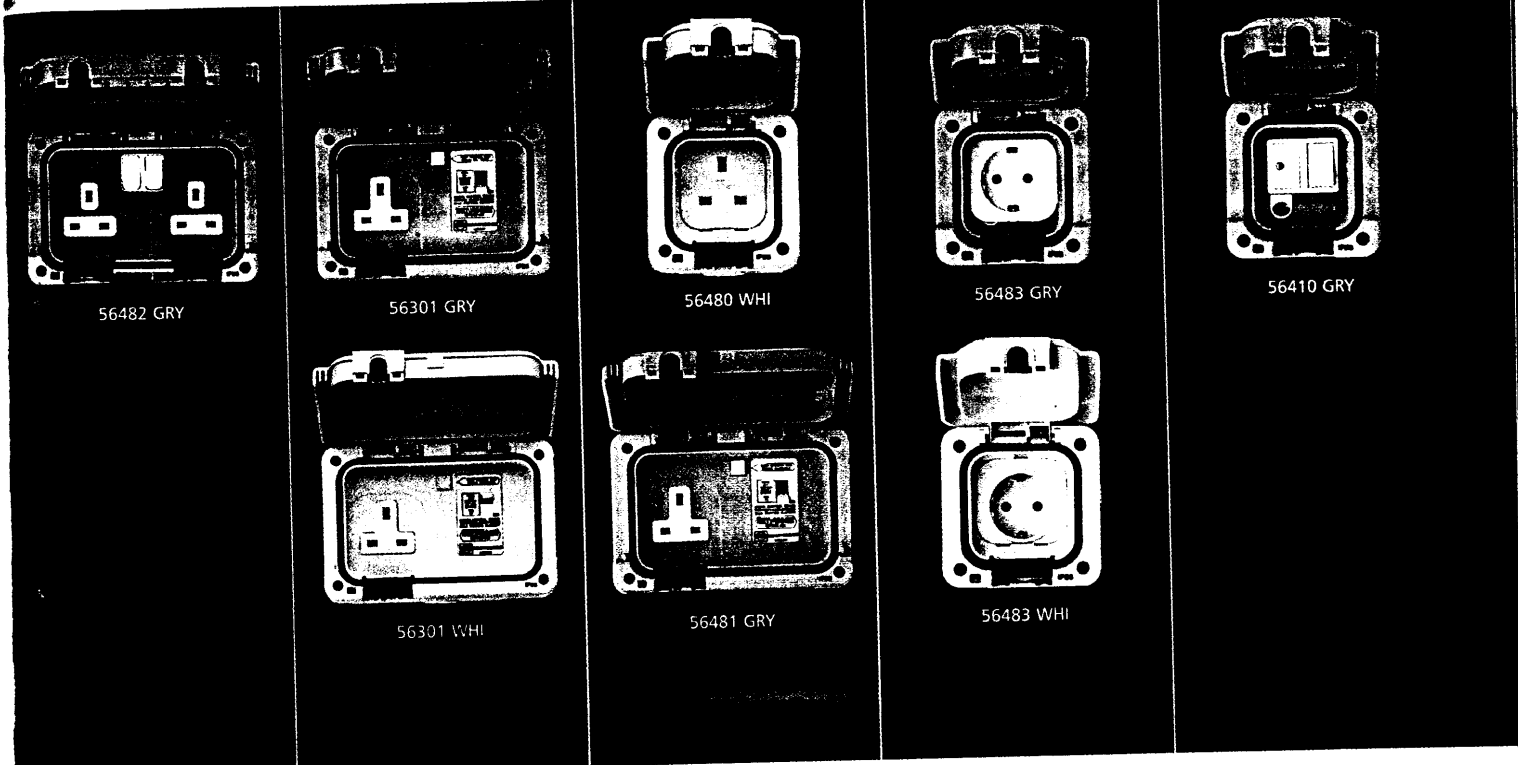

56482 GRY
56482 WHI
13 AMP DP
2 GANG
SWITCHED

1
1
new

56301 GRY
56301 WHI
1 GANG DP
RCD PROTECTED
SENTRYSOCKET
PULSATING D.C. AND A.C.
FAULT CURRENT SENSITIVE
30MA ACTIVE CONTROL CIRCUIT
240 Vac 50HZ ONLY

1
1

56480 GRY
56480 WHI
13 AMP
1 GANG
UNSWITCHED
56481 GRY
56481 WHI
13 AMP
2 GANG
UNSWITCHED

1
1
1
1


56483 GRY
56483 WHI
16 AMP
1 GANG
2P+E
UNSWITCHED
(NON UK)

1
1

56410 GRY
56410 WHI
13 AMP DP
1 GANG
SWITCHED, FUSED

1
1
new

Fixing holes are for No.8 woodscrews (not supplied).
Backbox has 5 cable entries, 2 on top and 3 centrally on other 3 edges. Supplied with earth and loop terminals in backbox.
DIMENSIONS: 175 x 115 x 80mm
BS.1363 Pt.2:1995



2 gang RCD protected switchsocket will be available late 2000

Fixing holes are for No.8 woodscrews (not supplied).
Supplied with an earth terminal and a loop terminal in the back box. The Sentrysocket has 5 entries. Suitable for supply voltage of 230V a.c. 50HZ
DIMENSIONS: 175 x 115 x 80mm
BS.1363 Pt.2: 1995
BS.7288: 1990

IMPORTANT
Active Control Circuit
Incorporates a 'RE-SET' mechanism and is mains failure sensitive. It will function under all normal conditions expected of an RCD but it will also trip in the event of a power cut. Ideal where hazardous equipment may suddenly energise with no warning. Suitable for use in machinery and heat developing situations.

56481 has 5 entries.

Fixing holes are for No.8 woodscrews (not supplied).
56480 has 4 x 20mm entries, 1 on each edge and is supplied with an earth terminal and a loop terminal in the back box.
56481 has 5 entries.
DIMENSIONS:
1 gang: 95 x 95 x 80mm
2 gang: 175 x 115 x 80mm
BS.1363 Pt.2: 1995

DIMENSIONS
1 gang 95 x 95 x 80mm
2 gang 175 x 115 x 80mm

BS 1363 Pt. 2: 1995

Fixing holes are for No.8 woodscrews (not supplied).
56483 is for use with plugs having right angled cable exit. It cannot be used with rear entry box (56504).
DIMENSIONS:
95 x 95 x 80mm
IEC 884-1: 1994

Fitted with a 13A fuse link to BS.1362.
Fixing holes are for No.8 woodscrews (not supplied).
Backbox has 4 x 20mm entries, 1 on each edge, and is supplied with an earth terminal in the backbox.
DIMENSIONS: 95 x 95 x 80mm
BS.1363 Pt.4:1995

Masterseal enclosures are manufactured from polycarbonate. This provides an extremely high level of impact resistance. However some chemicals and synthetic oils can harm polycarbonate.
Refer to Technical Hotline for assistance +44 (0) 1268 563720