


CS261

5 Per Pack	Price Per Pack				
Colour	Order Code	1+	10+	20+	50+
<b>Screw Mount</b>					
Red	<b>462-883</b>				
Black	<b>462-895</b>				
Red, Black, Blue, Yellow, Green	<b>462-901</b>				
<b>Press Fit</b>					
Red	<b>462-913</b>				
Black	<b>462-925</b>				
Red, Black, Blue, Yellow, Green	<b>462-937</b>				

## Shrouded Sockets 32A

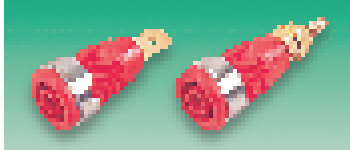

Tab = 6.35 0.8, L=33, Dia=14.5 max Stud=M4 15, L = 39, Dia = 14.5 max  
Panel thickness = 12 max., Panel cut-out = 12 (M12 thread)

Fully insulated safety sockets for use with shrouded plugs. Available in tab or stud termination. Stud termination can either be by the stud or via the solder bucket in the end of the stud. Manufactured to **VDE 0100/0110**, **IEC1010-1** and **BG** approved.

Current rating	32A	Housing	Polyamide, <b>UL94V-2</b>
Operating voltage	1000V CATII	Contacts	Brass, gold plated
Temperature range	-40°C to +80°C	Termination	Screw or solder

FOR PANEL ASSEMBLY TOOLS 225-071, SEE **BELOW**

Mftrs. List No. Tab = 23.3060-x, Stud = 23.3020-x, where x = 1-red, 2-blue, 3-white, 4-black, 5-yellow, 6-green

CS190

5 Per Pack	Price Per Pack				
Colour	Order Code	1+	10+	20+	50+
<b>Tab Termination</b>					
Red	<b>225-034</b>				
Black	<b>225-046</b>				
Green	<b>269-451</b>				
Blue	<b>269-463</b>				
Yellow	<b>269-475</b>				
White	<b>269-487</b>				
<b>Stud Termination</b>					
Red	<b>.269-499</b>				
Black	<b>.269-505</b>				
Green	<b>.269-517</b>				
Blue	<b>.269-529</b>				
Yellow	<b>.269-530</b>				
White	<b>.269-542</b>				

## Socket Safety Cap



- Covers unused panel mounted sockets

Material: LDPE



CS168

Order Multiple=5	Price Each				
Mftrs. List No.	Order Code	5+	100+	200+	500+
Clear 23.5140-33	<b>338-3519</b>				
Black 23.5140-21	<b>340-5588</b>				

## Assembly Tooling



Push-fit tool

Tooling for screw mount sockets

Two tube spanner tools with large easy grip handles for assembling Multi-Contact screw mount sockets to the panel. Also a turned metal tool for pressing push-fit sockets into the panel in association with a press or drilling machine.

Mftrs. List No. 25.0020+25.0022 = 225-071, 25.0033 = 462-949

CS262

Socket Type	Order Code	Price Each
Screw mount	<b>225-071</b>	
Push-fit	<b>462-949</b>	

## Shrouded Sockets 24/32A



- Safety press-fit socket 4mm
- SEP2610 Faston 4.8 0.8mm
- SEP2620 Faston 6.3 0.8mm
- Manufactured to **DIN46244**
- For installation in equipment chassis with a wall thickness from 1mm to 10mm
- IEC1010** compliant



Rated voltage	1000VDC	Contact resistance	5mΩ
Current rating	24A (SEP2610, 32A (SEP2620)	Temperature range	-40°C to +80°C

Mftrs. List No. 972361 SEP2610, 972362 SEP2620  
+colour code: 100 (black), 101 (red), 102 (blue), 103 (yellow), 104 (green), 188 (yellow/green)

CS552

5 Per Pack	Price Per Pack					
Colour	Order Code	1+	10+	25+	50+	100+
<b>SEP2610</b>						
Blue	<b>401-7493</b>					
Yellow	<b>401-7511</b>					
Yellow-Green	<b>401-7523</b>					
Green	<b>401-7535</b>					
Red	<b>401-7547</b>					
Black	<b>401-7559</b>					
<b>SEP2620</b>						
Blue	<b>401-7560</b>					
Yellow	<b>401-7572</b>					
Yellow-Green	<b>401-7584</b>					
Green	<b>401-7596</b>					
Red	<b>401-7602</b>					
Black	<b>401-7614</b>					

## Shrouded Sockets 32A



- Safety built in socket 4mm
- Faston 6.3 0.8mm terminal
- Manufactured to **DIN46244**
- Contact material brass gold-plated
- For installation in equipment chassis with a wall thickness upto 6mm
- IEC 1010** compliant



Rated voltage	1000VDC	Contact resistance	5mΩ
Current rating	32A	Temperature range	-40° to +80°C

Mftrs. List No. 972356-100 (black), 972356-101 (red), 972356-102 (blue), 972356-103 (yellow), 972356-104 (green), 972356-188 (yellow/green)

CS550

5 Per Pack	Price Per Pack					
Colour	Order Code	1+	10+	25+	50+	100+
Red	<b>859-138</b>					
Black	<b>859-140</b>					
Blue	<b>400-2660</b>					
Yellow	<b>400-2672</b>					
Green	<b>400-2684</b>					
Yellow/Green	<b>400-2696</b>					

## Shrouded Sockets 24A



- Safety press-fit socket 4mm
- 1.9mm soldering spike
- Contact material brass gold-plated
- For installation in equipment chassis with a wall thickness from 1mm to 10mm
- IEC 1010** compliant



Rated voltage	1000VDC	Contact resistance	5mΩ
Current rating	24A	Temperature range	-40° to +80°C

Mftrs. List No. 972363-100 (black), 972363-101 (red), 972363-102 (blue), 972363-103 (yellow), 972363-104 (green), 972363-188 (yellow/green)

CS551

5 Per Pack	Price Per Pack					
Colour	Order Code	1+	10+	25+	50+	100+
Red	<b>859-059</b>					
Black	<b>859-060</b>					
Yellow-Green	<b>859-072</b>					
Blue	<b>400-2702</b>					