

| | Voltage | Order Code | 1+ | 5+ | 10+ | 15+ | 25+ |
|-------------------------------|----------|------------|----|----|-----|-----|-----|
| 80mm, Ultra Low Noise | | | | | | | |
| | 115V | .719-869 | | | | | |
| | 230V | .719-870 | | | | | |
| 80mm, Super Low Noise | | | | | | | |
| | 115V | .147-598 | | | | | |
| | 230V | .147-597 | | | | | |
| 80mm, Low Noise | | | | | | | |
| | 115V | .147-457 | | | | | |
| | 230V | .147-458 | | | | | |
| 80mm, Standard | | | | | | | |
| | 115V | .719-808 | | | | | |
| | 230V | .719-810 | | | | | |
| 80mm, Dual Voltage | | | | | | | |
| | 115/220V | .151-209 | | | | | |
| 92mm Standard | | | | | | | |
| | 115V | .315-618 | | | | | |
| | 230V | .315-898 | | | | | |
| | 115V | .315-904 | | | | | |
| | 230V | .315-916 | | | | | |
| 119mm, Super Low Noise | | | | | | | |
| | 115V | .147-594 | | | | | |
| | 230V | .147-593 | | | | | |
| 119mm, Low Noise | | | | | | | |
| | 115V | .147-455 | | | | | |
| | 230V | .147-456 | | | | | |
| 119mm, Standard | | | | | | | |
| | 115V | .147-447 | | | | | |
| | 230V | .147-448 | | | | | |
| | 115V | .719-900 | | | | | |
| | 230V | .719-912 | | | | | |
| 610mm Connecting Lead | | | | | | | |
| | | .147-454 | | | | | |

- Low cost, low noise, high pressure fans
- Impedance protected
- Sleeve bearings
- Diecast aluminium zinc housings
- **UL94V-0** rated plastic impellers
- Supplied with 300mm, 22 AWG lead wire
- Approved to **TUV, UL** and **CSA**


Operating temperature -10°C to +70°C Life expectancy >30,000 hours @ 55°C

| Voltage Vac | Power Watts | Air Flow cu ft/min | ltrs/sec | Noise dBA @ 1m | Bearing Type | Order Code |
|------------------------|-------------|--------------------|--------------|----------------|--------------|------------|
| 80mm Standard | | | | | | |
| 115 | 12 | 30 | 14.1 | 35 | SB | 926-061 |
| 230 | 10 | 30 | 14.1 | 35 | SB | 926-073 |
| 119mm Low Noise | | | | | | |
| 115 | 11 | 76 | 35.8 | 38 | SB | 926-085 |
| 230 | 11 | 76 | 35.8 | 38 | SB | 926-097 |
| 119mm Standard | | | | | | |
| 115 | 18 | 105 | 49.5 | 48 | SB | 926-103 |
| 230 | 18 | 107 | 50.4 | 50 | SB | 926-115 |
| | | 80mm | 119mm | | | |
| | | Height | 80 | 119 | | |
| | | Width | 80 | 119 | | |
| | | Depth | 38 | 38 | | |
| | | Cut-out ∅ | 77 | 116 | | |
| | | Fix centres | 71.5 71.5 | 105 105 | | |
| | | Fix centres ∅ | 4.3 | 4.3 | | |

FM31

| Voltage | Order Code | 1+ | 10+ | 25+ | 50+ | 100+ |
|------------------------|------------|----|-----|-----|-----|------|
| 80mm Standard | | | | | | |
| 115V | .926-061 | | | | | |
| 230V | .926-073 | | | | | |
| 119mm Low Noise | | | | | | |
| 115V | .926-085 | | | | | |
| 230V | .926-097 | | | | | |
| 119mm Standard | | | | | | |
| 115V | .926-103 | | | | | |
| 230V | .926-115 | | | | | |

80mm, 120mm

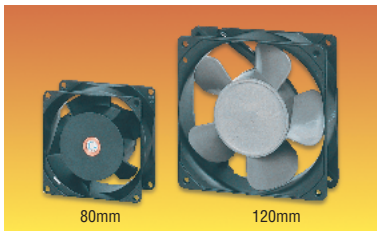


- **UL94V-0** plastic impeller and diecast aluminium casing
- Shielded ball bearings
- Impedance protected
- Connection via two 0.11" terminals
- **UL, CSA** approved

| Dimensions H W D | Voltage Vac | Power Watts | Air Flow cu ft/min | ltrs/sec | Noise dBA @ 1m | Mftrs. List No. | Order Code |
|------------------|-------------|-----------------|--------------------|--------------|----------------|-----------------|------------|
| 80 80 38 | 230 | 10 | 26.5 | 12.5 | 33 | 3115PS-23T-B30 | 538-206 |
| 120 120 38 | 230 | 15 | 95.3 | 45 | 37 | 4715MS-23T-B50 | 538-218 |
| | | Fan size | 80mm | 120mm | | | |
| | | Cut-out ∅ | 77 | 114.5 | | | |
| | | Fix. centres | 71.5 | 105 | | | |
| | | Fix. hole ∅ | 4 | 4.3 | | | |


FM28

| Dimensions H W D | Voltage ac | Order Code | 1+ | 10+ | 25+ | 50+ | 100+ |
|------------------|------------|------------|----|-----|-----|-----|------|
| 80 80 38 | 230 | .538-206 | | | | | |
| 120 120 38 | 230 | .538-218 | | | | | |

80mm, 119mm

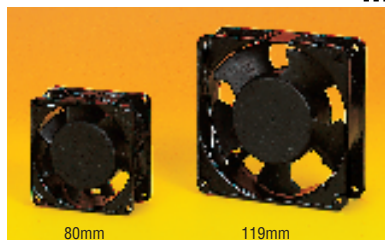

160mm



- Efficient, low noise fans
- Thermally protected shaded pole motor.
- Approved to **UL, VDE**, certified by **CSA**.
- Fitted with ball bearings.

Dia = 150, D = 55
Cut-out ∅ = 147
Fix. Centres = 162 4.5

Life expectancy > 50,000 hours

| Voltage Vac | Power Watts | Air Flow cu ft/min | ltrs/sec | Noise dBA@1m | Operating Temp °C | Lead Length | Mftrs. List No. | Order Code |
|-------------|-------------|--------------------|----------|--------------|-------------------|-------------|-----------------|------------|
| 110 | 39 | 232 | 109 | 52 | -30 to +65 | 330 | W2S130-AA25-01 | 151-081 |
| 240 | 40 | 206 | 97 | 49 | -30 to +65 | 330 | W2S130-AA03-01 | 151-082 |
| 110/240 | 40 | 206 | 97 | 49 | -30 to +65 | 330 | W2S130-AA03-49 | 151-083 |

FM14

| Voltage | Order Code | 1+ | 5+ | 10+ | 15+ | 25+ |
|--------------|------------|----|----|-----|-----|-----|
| 160mm | | | | | | |
| 110 | .151-081 | | | | | |
| 240 | .151-082 | | | | | |
| 110/240 | .151-083 | | | | | |

Continued

Free Same Day Delivery

For orders received before 12.30pm we provide free same day delivery.