

FUS247X

| Rating (A) | Order Code | Price Each | | | |
|------------|------------|------------|-----|------|------|
| | | 1+ | 10+ | 100+ | 200+ |
| 32 | .329-5552 | | | | |
| 40 | .329-5564 | | | | |
| 50 | .329-5576 | | | | |
| 63 | .329-5588 | | | | |
| 80 | .329-5590 | | | | |
| 100 | .329-5606 | | | | |
| 125 | .329-5618 | | | | |

aM (Motor Rated)

- European style industrial HRC fuses for applications where an initial surge has to be absorbed (e.g. motor start)
- Manufactured in accordance with IEC 269-3-1, NFC61.201 and UNE21.103
- Approved by Lloyds Register of Shipping and Bureau Veritas

| | | | |
|----------------|--|-------------------|---------------------------------------|
| Voltage rating | 660Vac (up to 80A) 500Vac (100A) 400Vac (125A) | Breaking capacity | 80kA (up to 80A) 120kA (100, 125A) |
|----------------|--|-------------------|---------------------------------------|

| Rating (A) | Order Code | Price Each | | | |
|------------|------------|------------|-----|------|------|
| | | 1+ | 10+ | 100+ | 200+ |
| 32 | .329-5620 | | | | |
| 40 | .329-5631 | | | | |
| 50 | .329-5643 | | | | |
| 63 | .329-5655 | | | | |
| 80 | .329-5667 | | | | |
| 100 | .329-5679 | | | | |
| 125 | .329-5680 | | | | |

Fuseholder for 22.58mm fuses

- Manufactured in accordance with IEC 269-2-1, 947-3, NFC63210-63001, VDE0636-1 and UNE20129-21103
- Approved by Lloyds Register of Shipping and Bureau Veritas

| | | | |
|----------------|---|-------------------|--------------------------------------|
| Voltage rating | 660V ac (up to 80A) 500V ac (100A) 400V ac (125A) | Breaking capacity | 80kA (up to 80A) 120kA (100,125A) |
|----------------|---|-------------------|--------------------------------------|

H = 140, W = 35, D (incl. lever) = 88, D(excl. lever) = 58, Terminal capacity = 16mm²

| | Order Code | Price Each | | | |
|------------------------|------------|------------|-----|-----|-----|
| | | 1+ | 10+ | 25+ | 50+ |
| Single Pole Fuseholder | .329-5692 | | | | |

Industrial HRC Fuses

BS88 Pullcap Style



L = 28.6, Dia. = 12.7

- Pullcap/MD style HRC cartridge fuses
- Commercial and industrial consumer unit applications
- Comply with BS88
- ASTA certified

LAWSON



Breaking capacity 80kA @ 415V ac, 40kA @ 250V dc

FUS420

| Rating | Order Code | Price Each | | | | |
|--------|------------|------------|-----|-----|------|------|
| | | 1+ | 10+ | 50+ | 100+ | 250+ |
| 2A | .329-5308 | | | | | |
| 4A | .329-5310 | | | | | |
| 6A | .329-5321 | | | | | |
| 10A | .329-5333 | | | | | |
| 16A | .329-5345 | | | | | |
| 20A | .329-5357 | | | | | |
| 25A | .329-5369 | | | | | |
| 32A | .329-5370 | | | | | |

BS1361 Style




Domestic and industrial consumer unit fuses manufactured to comply with BS1361. ASTA certified.

| | | | |
|----------------|---------|-------------------|--------|
| Voltage rating | 240V ac | Breaking capacity | 16.5KA |
|----------------|---------|-------------------|--------|

| Current Rating | Dimensions | | Mfrs. List No. | Order Code |
|----------------|------------|-------|----------------|------------|
| | L | Dia. | | |
| 5A | 23 | 4.8 | TDC 119 5A | 540-365 |
| 15A | 26 | 10 | TDC 120 15A | 540-377 |
| 20A | 26 | 10 | TDC 120 20A | 540-389 |
| 30A | 29 | 12.7 | TDC 121 30A | 540-390 |
| 45A | 35 | 16.67 | TDC 122 45A | 540-407 |

| Current Rating | Order Code | Price Each | | | |
|----------------|------------|------------|-----|------|------|
| | | 5+ | 25+ | 100+ | 250+ |
| 5A | .540-365 | | | | |
| 15A | .540-377 | | | | |
| 20A | .540-389 | | | | |
| 30A | .540-390 | | | | |
| 45A | .540-407 | | | | |

Low Voltage Industrial HRC

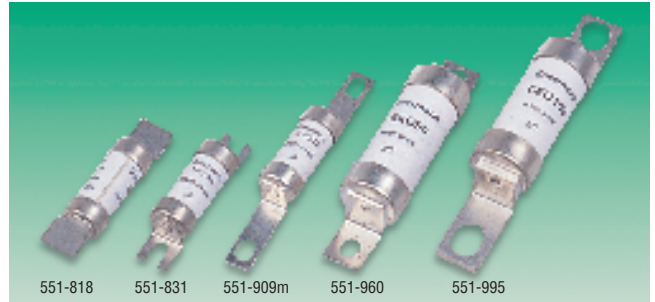

Industrial HRC fuselinks to BS88 and IEC269 (parts 1 and 2) available in general purpose and dual rated motor circuit styles.

Voltage rating 550V ac Breaking capacity 80kA

| Size | Overall Length | Diameter | Fixing Centres | Suitable Fuseholder | Mfrs. List No. |
|------|----------------|----------|----------------|---------------------|----------------|
| F1 | 58.7 | 13.8 | — | 556-154 | NSD |
| A1 | 54.5 | 13.8 | 44.5 | 556-361 | NITD |
| A2 | 85.0 | 13.8 | 73.0 | 556-373 | AAO |
| A3 | 87.0 | 21.4 | 73.0 | 556-385 | BAO |
| A4 | 111.0 | 21.4 | 94.0 | 177-607 | CEO |

FUS258X

| Current Rating | Order Code | Price Each | | |
|--|------------|------------|-----|-----|
| | | 1+ | 20+ | 50+ |
| Size F1 – Offset Blade Tag - NSD | | | | |
| 2A | 551-764 | | | |
| 4A | 551-776 | | | |
| 6A | 551-788 | | | |
| 10A | 551-790 | | | |
| 16A | 551-806 | | | |
| 20A | 551-818 | | | |
| 25A | 968-560 | | | |
| 32A | 968-572 | | | |
| Size A1 – Open Ended Slotted Tag - NITD | | | | |
| 2A | 551-820 | | | |
| 4A | 551-831 | | | |
| 6A | 551-843 | | | |
| 10A | 551-855 | | | |
| 16A | 551-867 | | | |
| 20A | 551-879 | | | |
| 25A | 968-584 | | | |
| 32A | 968-596 | | | |
| 20M25A | 968-602 | | | |
| 20M32A | 551-880 | | | |
| 32M40A | 968-614 | | | |
| 32M50A | 968-626 | | | |
| 32M63A | 968-638 | | | |
| Size A2 – Offset Bolted Tag - AAO | | | | |
| 2A | 968-640 | | | |
| 4A | 968-651 | | | |
| 6A | 551-892 | | | |
| 10A | 551-909 | | | |
| 16A | 551-910 | | | |
| 20A | 551-922 | | | |
| 25A | 551-934 | | | |
| 32A | 551-946 | | | |
| 32M40A | 968-663 | | | |
| 32M50A | 968-675 | | | |
| 32M60A | 968-687 | | | |
| Size A3 – Offset Bolted Tag - BAO | | | | |
| 40A | 551-958 | | | |
| 50A | 551-960 | | | |
| 63A | 551-971 | | | |
| 63M80A | 968-699 | | | |
| 63M100A | 968-705 | | | |
| Size A3 – OSD | | | | |
| 80A | 927-790 | | | |
| 100A | 927-806 | | | |
| Size A4 – Offset Bolted Tag - CEO | | | | |
| 80A | 551-983 | | | |
| 100A | 551-995 | | | |
| 100M125A | 968-717 | | | |
| 100M160A | 968-729 | | | |
| 100M200A | 968-730 | | | |