




© COPYRIGHT THIS DRAWING IS ISSUED BY SWANN INDUSTRIES PTE LTD ON THE UNDERSTANDING THAT IT IS STRICTLY CONFIDENTIAL AND MAY NOT BE REPRODUCED OR UTILIZED IN ANY WAY WITHOUT PRIOR WRITTEN PERMISSION.




APPROVALS

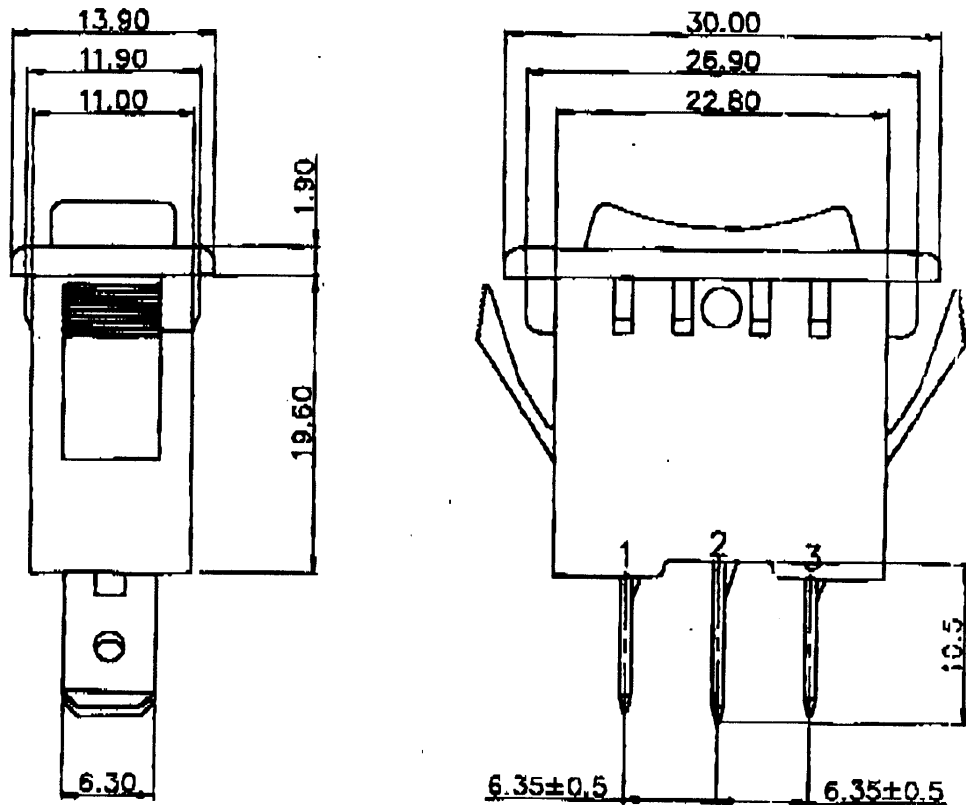

SERIES 40D B/B-S SWITCH

(335 8550)

Tolerances Unless Noted		Scale	2 : 1		Part No. 33412-041-11	
Whole No.	± 1.0	Material	//		Title SERIES 40D	
1 Place Decimal	± 0.5	Finishing	//		SCALLOP BUTTON SWITCH	
2 Place Decimal	± 0.25	 SWANN INDUSTRIES PTE LTD	Drawn	CHRIS	01.09.00	
Angles :	± 8°		Checked			
DO NOT SCALE			Approved			

P3/B

D E S C R I P T I O N

PRODUCT COVERED:

Component, Special-Use Switches:

<u>Cat. No.</u>	<u>Electrical Rating</u> <u>A-V-f-HF</u>	<u>Temp.,</u> <u>Deg. C</u>	<u>POL/</u> <u>THR</u>	<u>PP</u>	<u>Endur</u>	<u>Spcoa</u>
39, 40	6 A	80	1 or 2	PP	6K	2 (Series f/b G, H, I and M) A1.
41, 43, 50 51, 53, 54	125/250 V ac 60 Hz		1 or 2			
70, 82 475 series ww/o prefix A, all f/b letters or numbers	6 A, 28 V dc, 6 A, 14 VT, or 15 A/7.5 A, 125/250 V ac 3 A, 120 VL					
41D	12 A/125 V ac	80	1/2	PP	6K	A1
70D, 475D	6 A/250 V ac					
82J	13/125 V ac	80	1/2	PP	6K	A1
40D, 43D	12 A/125 V ac 6 A/250 V ac 13 A/125 V ac or 15 A/125 V ac 7.5 A/250 V ac	80	1/2	PP	6K	A1

EXPLANATION OF PRODUCT COVERED TABLE:

- Abbreviations      f/b - followed by  
if                    ww/o - with or without  
used                Res. - Resistive load. 98-100% power factory
- POL/THR - No of Poles/No. of Throw. "M" stands for Multi-pole or Multi-Throw, e.g. 2/M indicates 2-Pole, Multi-Throw.
- PP - "PP" stands for Per Pole. PP in this column indicates that each pole is capable of switching the rated current.
- ENDUR - Endurance Rating
- SPCOA - Special Conditions of Acceptability; the applicable special COAs are indicated in this column in number form. The corresponding COAs are given in the following page.