

- Rolling contact
- PCB or Panel Mounting
- Multi position
- SIL pin configuration 3.2 centres


Contacts	Silver over nickel plate over copper alloy (BBM)	Contact resistance	30mΩ max
Case material	Tin plate over steel	Dielectric Strength	500VAC
Contact Rating	250mA @ 125VAC, 150mA @ 12VDC	Operating life	6,000 ops
		Operating temperature	-10°C to +60°C

SW365

Panel Mount	Length	Mftrs List No.	Order Code	Price Each			
				1+	25+	100+	250+
SPDT, vertical	11	SLS121	311-662				
PCB Mount							
SPDT, vertical	11	SLS121PC	311-674				
SPDT, right angle	11	SLS121RA	311-686				
SP3T, vertical	15.1	SLS131PC	311-698				
SP3T, right angle	15.1	SLS131RA	311-704				
SP4T, vertical	18.2	SLS141PC	312-540				
SP4T, right angle	18.2	SLS141RA	312-551				
SP5T, vertical	21.4	SLS151PC	312-605				
SP5T, right angle	21.4	SLS151RA	312-617				

Miniature PCB Mounting

ALCOSWITCH/ **Thomas&Betts**



H = 7, D = 10.2

Contacts:	Silver plate over copper alloy (BBM)
Case material:	Steel
Contact rating:	250mA @ 125VAC, 150mA @ 12VDC
Contact resistance:	30mΩ max
Dielectric Strength:	500VAC
Operating life:	10,000 ops
Operating temperature:	-10°C +60°C

SW367

No of Ways	Length	Mftrs List No.	Order Code	Price Each			
				1+	25+	100+	250+
2	13.59	SLS220	312-629				
3	16.79	SLS230	312-630				
4	19.99	SLS240	312-642				
5	23.19	SLS250	312-654				
6	26.39	SLS260	312-666				

0.5A 50V dc



Miniature DPDT slide switch with solder tag connections. Ideal for prototyping, not recommended for industrial applications.

Contact resistance	<30mΩ	Proof voltage	ac 500V for 1 min.
Insulation resistance	500mΩ @ 500V dc		
Mechanical life	10,000 ops		

L = 15.0 W = 7.2, Fixing centres = 19.0 Depth behind panel = 11.5

SW72

10 Per Pack	Price Per Pack					
Order code	1+	10+	50+	250+	1K+	
599-293						

Voltage Selectors

Slide Switch, Snap-In Panel Mounting

SW Switches



- Two position mains slide switch with 120V or 240V markings
- Black nylon housing to **UL94V-0**
- Actuator lies flush with main body of switch to prevent inadvertent operation
- Approved to **VDE, SEV, UL** and **CSA**

Operating temperature -40°C to +85°C

Body: L = 33, W = 19, Depth behind panel = 16
Panel cut-out = 31.5 17.5, Tabs=2.8 0.8

Mftrs. List No. SE1022

SW147

Order Code	Price Each				
	1+	25+	50+	100+	500+
106-213					


Slide Switch, PCB and Panel Mounting

6(1)A @ 250V ac

Arcolectric
SWITCHES PLC



Best Value



Panel mount Body: L = 23, W = 14, D = 12, Panel cut-out = 13.3 6.25, Fixing holes=3.3 dia 34.0 29.75 to 30.65 14.2 to 14.3

Snap-in Body: L = 27.35, W = 14, D = 14.8 Panel cut-out = 14, D = 12

PCB mount Body L = 23, W = 14, D = 12

- Two position mains slide switches with 115 or 230 voltage markings
- Low profile actuator
- Approved to **VDE, SEV, DEMKO, NEMKO, SEMKO, KEMA, SETI, OVE, UTE, SAA, UL** and **CSA**

Mftrs. List No. T2225B = 147-911, T2228E = 242-536, X2225C = 152-274

SW32

	Order Code	Price Each			
		1+	25+	100+	250+ 500+
Panel mount	.147-911				
Snap-in	.242-536				
PCB mount	152-274				

Rotary Switch, Panel Mounting

6.3A @ 250V ac

B BULGIN
Electrical - Electronic Components



Body: L = 14.3, Panel cut-out = 12.75 dia, Bezel: Round = 15.9 dia, Square = 15.9 15.9, Keyway=2.54 1.25, Tabs L=7.9, W=2.8

- Two position mains rotary switch with 120 and 240 voltage markings
- Approved to **VDE, CSA** and **SEMKO**

FOR MATCHING FUSEHOLDERS
SEE ORDER CODES 319-417 & 319-429, **PAGE 730**

Mftrs. List No. VS0002 = 149-288, VS0001 = 150-362

SW126


	Order Code	Price Each		
		1+	100+	250+ 500+
Round	149-288			
Square	150-362			

Rocker Switches

Miniature

4A @ 250V ac 10(6) @ 250V ac

multicomp

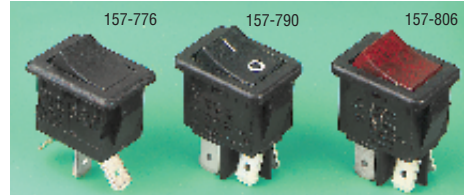

Best Value

Bezel = 21 15
Depth = 22.7
Tabs = 4.8 0.8
Cut out: 1mm panel (Min) 19.3 13
3mm panel (max) 19.5 13

- Compact range of rocker switches which fit standard panel cut-out
- **VDE, UL, CSA, SEV** and **SEMKO** approved

Mechanical life	>100,000 ops	Insulation resistance	>50MΩ
Operating temperature	0°C to +85°C	Contact resistance	20mΩ
Dielectric strength	3.5KV ac	Inrush current	100A

Mftrs. List No.: MC36328-001-01 = 157-764, MC36328-011-01 = 157-776, MC3813-011-01 = 157-788,

MC3813-011-21 = 157-790, MC3811-091-02 = 335-8460, MC3811-091-05 = 335-8549

SW351

Rating	Order Code	Price Each				
		1+	50+	100+	250+ 500+	
Non-Illuminated						
4A @ 250V ac						
SPST	157-764					
SPDT	157-776					
10(6)A @ 250V ac						
DPST	157-788					
DPST, I/O marking	157-790					
Illuminated						
DPST, red	335-8460					
DPST, green	335-8549					

continued