

**BOURNS®**

## Features

- Industry standard SMT package
- Output voltage programmable from 0.75 V<sub>dc</sub> to 5.5 V<sub>dc</sub> via external resistor
- 10 A output current
- Up to 95 % efficiency
- Small size, low profile
- Cost-efficient
- Low output ripple and noise
- High reliability
- Remote on/off
- Output overcurrent protection (non-latching)
- Optional sequencing function

## MX(T)10A-3-5SA SMT Non-Isolated Power Module

### Description

Bourns® MX(T)10A-3-5SA is a non-isolated DC-DC converter offering designers a cost and space-efficient solution with standard features such as remote on/off, precisely regulated programmable output voltage and overcurrent protection and optional output voltage sequencing.

### Specifications

Parameter	Min.	Nom.	Max.	Units	Notes
<b>INPUT</b>					
Voltage	2.4		5.5	V <sub>dc</sub>	
Current			10.0	A <sub>dc</sub>	
Remote: ON/OFF					
Low or Open =	Standard On	-P option Off	0.4	V <sub>dc</sub>	10 µA max.
High =	Off	On	V <sub>In</sub>	V <sub>dc</sub>	1 mA max.
<b>OUTPUT</b>					
Voltage Adjustment Range	0.75		3.63	V <sub>dc</sub>	
Current	0.0		10.0	A <sub>dc</sub>	
Voltage Setpoint Accuracy	-2.0		2.0	% V <sub>o, set</sub>	
Line Regulation		0.3		% V <sub>o, set</sub>	
Load Regulation		0.4		% V <sub>o, set</sub>	
Temperature Regulation		0.4		% V <sub>o, set</sub>	
Ripple (pk-pk) (20 MHz Bandwidth)		25	50	mVpk-pk	1 µF ceramic//10 µF tantalum capacitors
Ripple (rms)		8	15	mVrms	1 µF ceramic//10 µF tantalum capacitors
Dynamic Load Response: 50 % to 100 % Load or 100 % to 50 % Load; (ΔI/Δt = 2.5 A/µs; 25 °C)		200 25		mV µs	1 µF ceramic//10 µF tantalum capacitors
50 % to 100 % Load or 100 % to 50 % Load; (ΔI/Δt = 2.5 A/µs; 25 °C)		100 100		mV µs	2 x 150 µF polymer capacitors
<b>GENERAL</b>					
MTBF		10,000		kHrs	
Operating Temperature	-40		+85	°C	
Storage Temperature	-55		+125	°C	
Switching Frequency		300		kHz	
Efficiency (V <sub>in</sub> = 5 V <sub>dc</sub> , T <sub>A</sub> = 25 °C, Full Load)		82.5		%	V <sub>o, set</sub> = 0.75 V <sub>dc</sub>
		88.0		%	V <sub>o, set</sub> = 1.2 V <sub>dc</sub>
		89.5		%	V <sub>o, set</sub> = 1.5 V <sub>dc</sub>
		91.0		%	V <sub>o, set</sub> = 1.8 V <sub>dc</sub>
		93.0		%	V <sub>o, set</sub> = 2.5 V <sub>dc</sub>
		95.0		%	V <sub>o, set</sub> = 3.3 V <sub>dc</sub>

### Applications

- Intermediate Bus architecture
- Distributed power applications
- Workstations and servers
- Telecom equipment
- Enterprise networks including LANs/WANs
- Latest generation ICs (DSP, FPGA, ASIC) and microprocessor powered applications

Specifications are subject to change without notice.  
Customers should verify device performance in their specific applications.

## Output Voltage Programming

Via external trim resistor between Trim and GND:

$$R_{trim} = \left[ \frac{21.07}{V_o - 0.7525} - 5.11 \right] \text{ k}\Omega$$


Via application of external voltage between Trim and GND:

$$V_{trim} = (0.7 - 0.1698 \times \{V_o - 0.7525\})$$

# MX(T)10A-3-5SA SMT Non-Isolated Power Module


# BOURNS®

## Product Dimensions

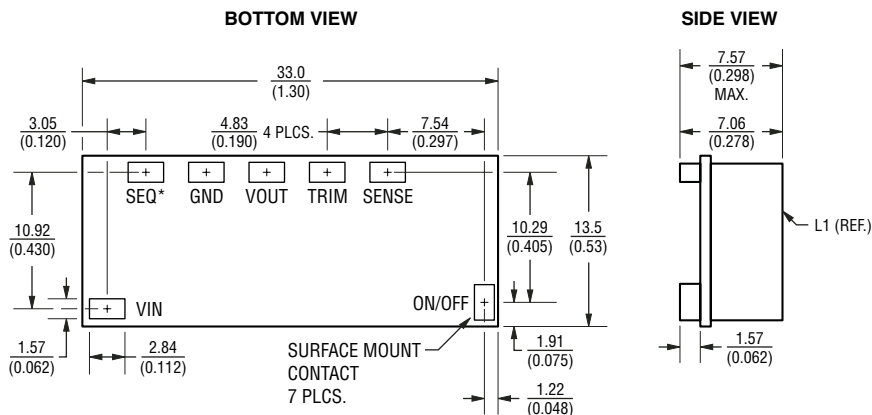


\*Pin Stuffed with MXT10A option only, absent with MX10A standard

## Recommended Pad Layout

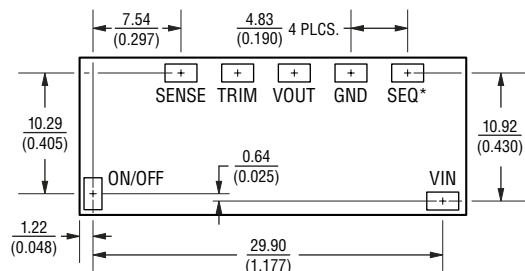


\*Pad required with MXT10A option only, not required with MX10A standard

## Pick and Place Location

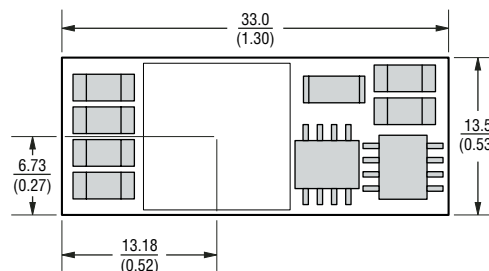

## Derating Output Current vs. Local Ambient Temp & Airflow

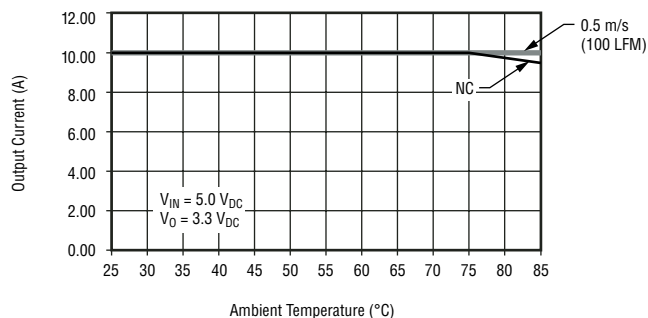

## How to Order

### MX(T)10A-3-5SA(-P)

- Configuration \_\_\_\_\_
- M = Surface Mount Device \_\_\_\_\_
- Internal Identifier \_\_\_\_\_
- Identifies Sequencing Pin Function (optional) \_\_\_\_\_
- Output Current (Amps) \_\_\_\_\_
- Input Voltage (V) \_\_\_\_\_
- Outputs \_\_\_\_\_
- S = Single \_\_\_\_\_
- Output Voltage (V)\* \_\_\_\_\_
- A = Adjustable \_\_\_\_\_
- Optional Positive On/Off Logic \_\_\_\_\_

\*Fixed output voltage parts and optional features available; contact factory.

REV. A 05/05

Specifications are subject to change without notice.  
Customers should verify device performance in their specific applications.



Reliable Electronic Solutions

**Asia-Pacific:** Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116  
**Europe:** Tel: +41-41 768 5555 • Fax: +41-41 768 5510  
**The Americas:** Tel: +1-951 781-5500 • Fax: +1-951 781-5700  
[www.bourns.com](http://www.bourns.com)