

Datasheet - SRB 301ST V.2



Guard door monitors and Safety control modules for
Emergency Stop applications / Monitoring of
electromechanical switchgear / SRB 301ST



- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
- Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains
- Fit for signal evaluation of outputs of safety magnetic switches
- 3 safety contacts, STOP 0
- 1 Signalling output

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description SRB 301ST
EAN code

Approval

Approval




Classification

Standards	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL	up e (STOP 0)
Control category	up 4 (STOP 0)
DC	99% (STOP 0)
CCF	> 65 points
PFH value	≤ 2,0.0 x 10 ⁻⁸ /h (STOP 0)
- notice	up to max. 36500 switching cycles/year and at max. 60% contact load
SIL	up 3 (STOP 0)
Mission time	20 Years
- notice	

K	n-op/y	t-cycle
20 %	525.600	1,0 min
40 %	210.240	2,5 min
60 %	75.087	7,0 min
80 %	30.918	17,0 min
100 %	12.223	43,0 min

Global Properties

Product name	SRB 301ST
Standards	IEC/EN 60204-1, EN 60947-5-1, EN ISO 13849-1, IEC 61508
Compliance with the Directives (Y/N) 	Yes
Climatic stress	EN 60068-2-78
Mounting	snaps onto standard DIN rail to EN 60715
Terminal designations	IEC/EN 60947-1
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, ventilated
- Material of the contacts	, self-cleaning, positive action
Weight	240 g
Start conditions	Automatic or Start button (Optional monitored)
Start input (Y/N)	Yes
Feedback circuit (Y/N)	Yes
Start-up test (Y/N)	No
Automatic reset function (Y/N)	Yes
Reset with edge detection (Y/N)	Yes
Pull-in delay	
- ON delay with automatic start	100 ms
- ON delay with reset button	25 ms
Drop-out delay	
- Drop-out delay in case of power failure	100 ms
- Drop-out delay in case of emergency stop	≤ 25 ms

Mechanical data

Connection type	Screw connection
Cable section	
- Min. Cable section	0,25 mm ²
- Max. Cable section	2.5 mm ²
Pre-wired cable	rigid or flexible
Tightening torque for the terminals	0,6 Nm
Detachable terminals (Y/N)	Yes
Mechanical life	10.000.000 operations
Electrical lifetime	Derating curve available on request
restistance to shock	10 g / 11 ms
Resistance to vibration To EN 60068-2-6	10...55 Hz, Amplitude 0,35 mm

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+60 °C
Storage and transport temperature	
- Min. Storage and transport temperature	-40 °C
- Max. Storage and transport temperature	+85 °C
Protection class	

- Protection class-Enclosure	IP40
- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U_{imp}	4 kV
Overvoltage category	II To VDE 0110
- Degree of pollution	2 To VDE 0110

Electromagnetic compatibility (EMC)

EMC rating	conforming to EMC Directive
------------	-----------------------------

Electrical data

Rated DC voltage for controls	
- Min. rated DC voltage for controls	20.4 V
- Max. rated DC voltage for controls	28.8 V
Rated AC voltage for controls, 50 Hz	
- Min. rated AC voltage for controls, 50 Hz	20.4 V
- Max. rated AC voltage for controls, 50 Hz	26.4 V
Rated AC voltage for controls, 60 Hz	
- Min. rated AC voltage for controls, 60 Hz	20.4 V
- Max. rated AC voltage for controls, 60 Hz	26.4 V
Contact resistance	max. 100 m Ω
Power consumption	2 W; 4.9 VA
Type of actuation	AC/DC
Switch frequency	max. 5 Hz
Rated operating voltage U_e	24 VDC -15% / $+20\%$, residual ripple max. 10% 24 VAC -15% / $+10\%$
Operating current I_e	0,09 A
Frequency range	50 / 60 Hz
Electronic protection (Y/N)	Yes
Fuse rating for the operating voltage	Internal electronic trip, tripping current F1: $> 0,5$ A; tripping current (S11, S21): > 50 mA Reset after disconnection of supply voltage
Bridging in case of voltage drops	80 ms

Inputs

Monitored inputs	
- Short-circuit recognition (Y/N)	optional
- Wire breakage detection (Y/N)	Yes
- Earth connection detection (Y/N)	Yes
Number of shutters	0 piece
Number of openers	2 piece
Cable length	1500 m with 1.5 mm ² ; 2500 m with 2.5 mm ²
Conduction resistance	max. 40 Ω

Outputs

Stop category	0
Number of safety contacts	3 piece
Number of auxiliary contacts	1 piece

Number of signalling outputs	0 piece
Switching capacity	
- Switching capacity of the safety contacts	max. 250 VAC, 8 A ohmic (inductive in case of appropriate protective wiring) min. 10 V, 10 mA
- Switching capacity of the auxiliary contacts	24 VDC, 2 A
Fuse rating	
- Protection of the safety contacts	8 A slow blow
- Fuse rating for the auxiliary contacts	2 A slow blow
Utilisation category To EN 60947-5-1	AC-15: 230 V / 6 A DC-13: 24 V / 6 A
Note on the utilisation category	Residual current at ambient temperature up to: - 45°C = 24 A; - 55°C = 18 A; - 60°C = 12 A
Number of undelayed semi-conductor outputs with signaling function	0 piece
Number of undelayed outputs with signaling function (with contact)	1 piece
Number of delayed semi-conductor outputs with signaling function.	0 piece
Number of delayed outputs with signalling function (with contact).	0 piece
Number of secure undelayed semi-conductor outputs with signaling function	0 piece
Number of secure, undelayed outputs with signaling function, with contact.	3 piece
Number of secure, delayed semi-conductor outputs with signaling function	0 piece
Number of secure, delayed outputs with signaling function (with contact).	0 piece

LED switching conditions display

LED switching conditions display (Y/N)	Yes
Number of LED's	4 piece
LED switching conditions display	
- The integrated LEDs indicate the following operating states.	
- Position relay K2	
- Position relay K1	
- Supply voltage	
- Internal operating voltage U_i	

Miscellaneous data

Applications



Emergency-Stop button



Guard system



Pull-wire emergency stop switches



Safety sensor



Safety light curtain

Dimensions

Dimensions

- Width	22.5 mm
- Height	100 mm

notice

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

notice - Wiring example

Input level: The example shows a 2-channel control of a guard door monitoring with two position switches, whereof one with positive break, external reset button (R) and feedback circuit (H2).

The control recognises cross-short, cable break and earth leakages in the monitoring circuit.

F1 = hybrid fuse

Relay outputs: Suitable for 2 channel control, for increase in capacity or number of contacts by means of contactors or relays with positive-guided contacts.

Switch setting: The cross-wire short detection function (factory default) is programmed by means of the switch located underneath the front cover of the module: position nQS (top): no cross-wire short protection, suitable for 1-channel applications and applications with outputs with potential in the control circuits. Position QS (bottom): cross-wire short protection, suitable for 2-channel applications without outputs with potential in the control circuits.

For 1-channel control, connect NC contact to S11/S12 and bridge S12/S22 (QS-switch = nQS)

Connect potential p-type outputs of safety light grids/curtains to S12/S22. The devices must have the same reference potential. (QS-switch = nQS)

Automatic start: The automatic start is programmed by connecting the feedback circuit to the terminals S12/X3. If the feedback circuit is not required, establish a bridge

The wiring diagram is shown with guard doors closed and in de-energised condition.

Documents

Operating instructions and Declaration of conformity (nl) 1 MB, 24.06.2010

http://127.0.0.1/Bilddata/Si_baust/Pdf/srb301st_v2/bedien/nl/mrl_srb_301st_v2_nl.pdf

Operating instructions and Declaration of conformity (de) 1 MB, 30.06.2010

http://127.0.0.1/Bilddata/Si_baust/Pdf/srb301st_v2/bedien/DE/mrl_srb_301st_v2_de.pdf

Operating instructions and Declaration of conformity (jp) 1 MB, 06.09.2010

http://127.0.0.1/Bilddata/Si_baust/Pdf/srb301st_v2/bedien/jp/mrl_srb_301st_v2_jp.pdf

Operating instructions and Declaration of conformity (es) 1 MB, 24.06.2010

http://127.0.0.1/Bilddata/Si_baust/Pdf/srb301st_v2/bedien/es/mrl_srb_301st_v2_es.pdf

Operating instructions and Declaration of conformity (en) 1 MB, 21.01.2010

http://127.0.0.1/Bilddata/Si_baust/Pdf/srb301st_v2/bedien/EN/mrl_srb_301st_v2_en.pdf

Wiring example (99) 20 kB, 04.08.2008

http://127.0.0.1/Bilddata/Si_baust/Srb301st/Schaltun/Ksrb3I05.pdf


Wiring example (99) 17 kB, 21.07.2010

http://127.0.0.1/Bilddata/Si_baust/Srb301st/Schaltun/ksrb3I26.pdf


BG-test certificate (de) 36 kB, 28.02.2005

http://127.0.0.1/Bilddata/Si_baust/Pdf/srb301st_v2/baumuste/z_s30p01.pdf


Images

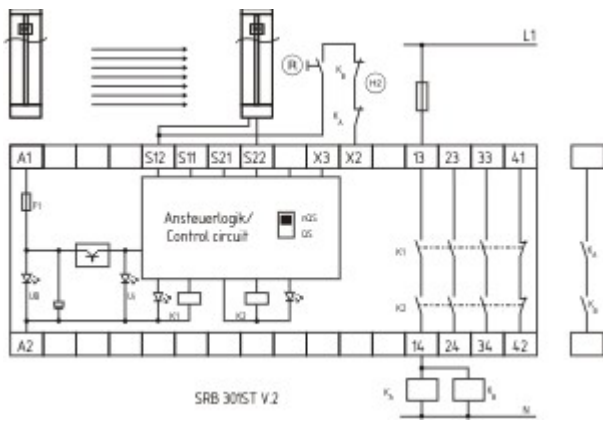

Wiring example

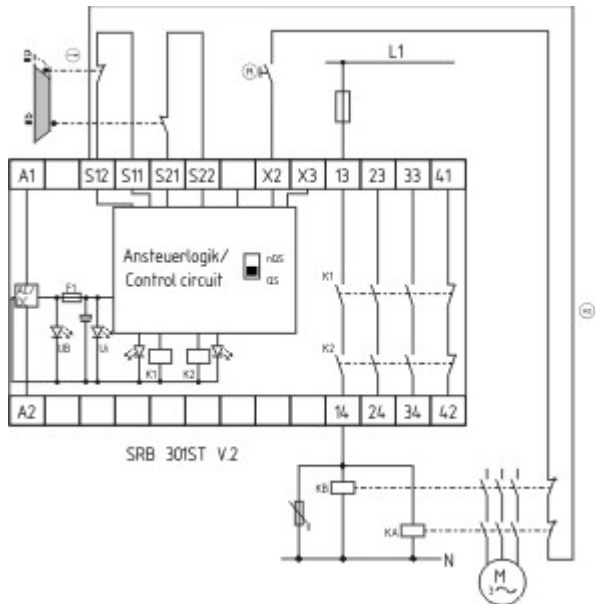

Wiring example

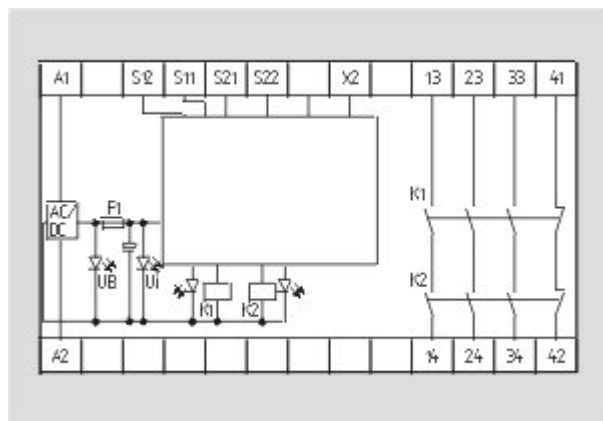

Internal wiring diagram