

**ACT20X**  
**ACT20X-2HDI-2SDO-RNC-S**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com



The ACT20X-HDI-SDO/ 2HDI-2SNO RNO/RNC isolating switch amplifiers are specially designed for recording NAMUR sensor signals and digital switching signals which originate from the Ex zone 0.

Switching relays, optionally available with NO or NC contacts, transfer output signals to the safe zone. Integrated alarm contacts issue an alert in the event of a malfunction; this makes troubleshooting easier and increases the system availability.

The rail mounted disconnect-switch amplifiers are optionally available in one- or two-channel versions. With 11 mm width per channel, the devices need little space in the electrical cabinet.

**General ordering data**

Order No.	<a href="#">8965380000</a>
Type	ACT20X-2HDI-2SDO-RNC-S
Version	ACT20X, EX signal isolating converter, 2-channel version, NC, With relay output
GTIN (EAN)	4032248784899
Qty.	1 pc(s).

**ACT20X**  
**ACT20X-2HDI-2SDO-RNC-S**

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com

**Technical data**

**Dimensions**

Length	119.2 mm	Width	22.5 mm
Height	113.6 mm		

**Temperatures**

Operating temperature	-20 °C...+60 °C	Storage temperature	-20 °C...+85 °C
-----------------------	-----------------	---------------------	-----------------

**input**

Trigger level high	> 2.1 mA	Triggerlevel low	< 1.2 mA
Sensor	NAMUR sensor, according to EN60947, Switch with or without RS, RP	Output signal in case of wire break	< 0.1 mA, > 6.5 mA (in case of wire break)
Sensor supply	8 V DC / 8 mA	Resistance	RP = 750 Ω / RS = 15kΩ
Input resistance	1 kΩ	Input frequency	0...5 kHz
Pulse duration	> 0.1 ms		

**Output**

Type	Relay, 2 NC (voltage-free)	Switching frequency	0.02 kHz
Power rating	≤ 500 VA / 60 W (safe area) ≤ 16 VA / 32 W (Zone 2)	Rated switching voltage	≤ 250 V AC / 30 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2)
Continuous current	≤ 2 A AC/DC (safe area, Zone 2 area)		

**Alarm output**

Type	Relay, 1 NC (voltage-free)	Nominal switching voltage	≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (Zone 2)
Continuous current	≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (Zone 2)	Power rating	≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2)

**General specifications**

Supply voltage	19.2 – 31.2 V DC	Type of connection	Screw connection
NAMUR supply	8 V DC / 8 mA	Power consumption	≤ 3 W (2 channels)
Protection degree	IP 20	Humidity	0...95 % (no condensation)

**Insulation coordination**

EMC standards	DIN EN 61326	Insulation voltage	2.6 kV (input / output)
Rated voltage	300 V		

**Data for Ex applications (ATEX)**

Voltage $U_0$	10.6 V DC	Current $I_0$	12 mA DC
Power $P_0$	32 W		

**Ratings IECEx/ATEX**

Certificate No. (ATEX)	KEMA09ATEX0168X	Certificate No. (IECEX)	IECEXKEM09.0072X
------------------------	-----------------	-------------------------	------------------

**Datasheet****ACT20X**  
**ACT20X-2HDI-2SDO-RNC-S****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Classifications**

ETIM 3.0	EC002479	ETIM 4.0	EC002479
UNSPSC	30-21-18-01	eClass 5.1	27-21-01-07
eClass 6.0	27-21-01-07		

**Approvals**


Approvals	CULUS; FMEX; IECEXKEM; KEMAATEX
-----------	------------------------------------

**ACT20X  
ACT20X-2HDI-2SDO-RNC-S**


**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-2083  
 www.weidmueller.com


**Drawings**


**Electric symbol**

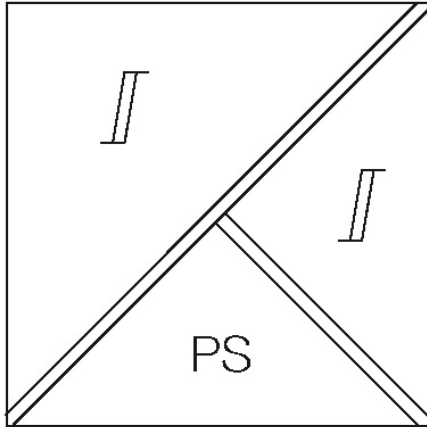

**Circuit diagram**

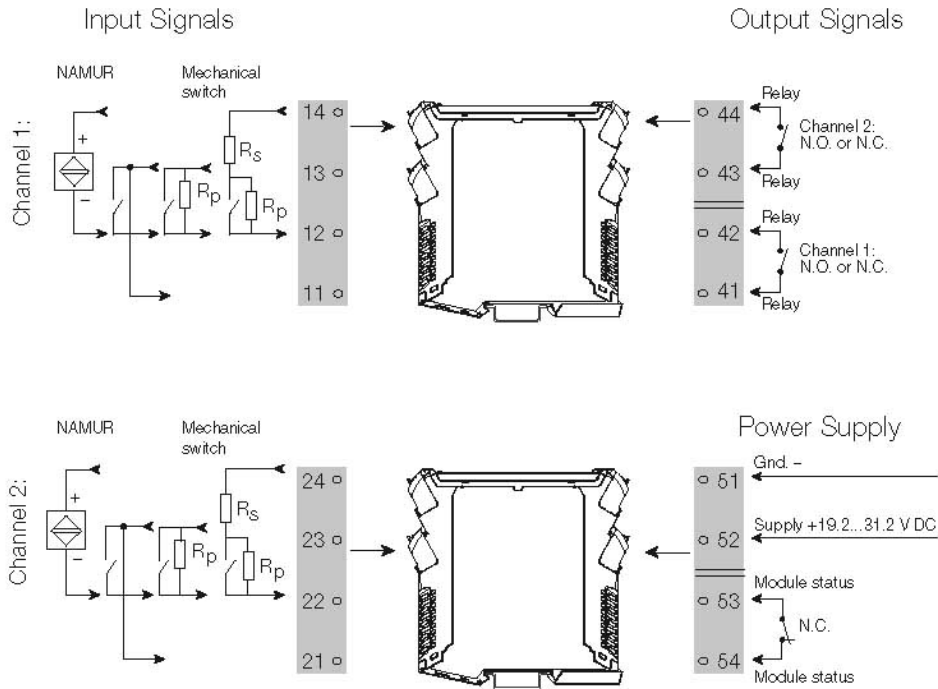

 Zone 0, 1, 2, 20, 21, 22 / Cl. I/II/III, div. 1 gr. A-G

 Zone 2 / FM Cl. 1, div. 2, gr. A-D o safe area