

STRUCTURE            Silicon Monolithic Integrated Circuit

TYPE                    **BDE0900G**

PRODUCT             Thermostat and Analog Temperature Sensor

- FEATURES
- 1) Highly accurate thermostat (  $\pm 4.0^{\circ}\text{C}$  )
  - 2) Thermostat sensing temperature 85, 90, 95°C with CTRL state
  - 3) Open drain output
  - 4) Hysteresis temperature ( TYP.  $10^{\circ}\text{C}$  )
  - 5) Highly accurate analog output (  $\pm 3.5^{\circ}\text{C}@T_a = 30^{\circ}\text{C}$  )
  - 6) Analog output temperature sensitivity (  $-10.68$  [ mV/ $^{\circ}\text{C}$  ] )
  - 7) Low supply current ( TYP. 16.0 $\mu\text{A}$  )
  - 8) Small package ( TYP. 2.90mm  $\times$  2.80mm  $\times$  1.25mm )

● ABSOLUTE MAXIMUM RATINGS (  $T_a = 25^{\circ}\text{C}$  )

PARAMETERS	SYMBOL	LIMIT	UNIT
Power Supply Voltage	$V_{DD}$	-0.3 to 7.0*1	V
Input Voltage ( CTRL )	$V_{IN}$	-0.3 to $V_{DD}+0.3$	V
Input Current ( CTRL )	$I_{IN}$	-1.0, +0.1	mA
OS terminal Voltage	$V_{OS}$	-0.3 to 7.0	V
OS terminal Current	$I_{OS}$	5.0	mA
Power dissipation	$P_d$	540**2	mW
Storage Temperature Range	$T_{stg}$	-55 to 150	$^{\circ}\text{C}$

\*1. Not to exceed  $P_d$

\*2. Reduced by 5.40mW for each increase in  $T_a$  of  $1^{\circ}\text{C}$  over  $25^{\circ}\text{C}$   
 ( mounted on 70mm  $\times$  70mm  $\times$  1.6mm Glass-epoxy PCB )


● RECOMMENDED OPERATING CONDITION

PARAMETERS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Power Supply Voltage	VDD	2.9	3.0	5.5	V
Operating Temperature Range	$T_{opr}$	-30	-	130	$^{\circ}\text{C}$

· Status of this document

The Japanese version of this document is the formal specification. A customer may use this translation version only for a reference to help reading the formal version. If there are any difference in translation version of this document, formal version takes priority.

## ● BLOCK DIAGRAM

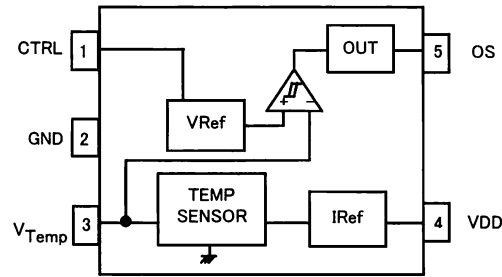

## ● PIN DESCRIPTION

PIN NO.	PIN NAME	FUNCTION	COMMENT
1	CTRL	Sensing temperature setting	Refer to page 3/4 ( TEMPERATURE / OUTPUT FORMAT TABLE ) for the sensing temperature setting.
2	GND	GROUND	
3	V <sub>Temp</sub>	Output voltage in inverse proportion to the temperature ( TYP. -10.68mV/°C )	Set the OPEN state or connect high impedance input node.
4	VDD	POWER SUPPLY	
5	OS	Digital thermostat output	Open Drain type ( Active L ) Use the pull-up resistor more than 10kΩ.

## ● TEMPERATURE ACCURACY ( unless otherwise specified, V<sub>DD</sub> = 3.0V )

PARAMETER	SYMBOL	LIMIT			UNIT	CONDITIONS
		MIN.	TYP.	MAX.		
<b>Thermostat</b>						
Sensing Temperature Accuracy	T <sub>acc</sub>	-	0	±4.0	°C	T <sub>a</sub> = 85, 90, 95°C
Sensing Temperature Hysteresis	Thys	7.5	10.0	12.5	°C	
<b>Analog Output</b>						
V <sub>Temp</sub> Temperature Accuracy	T <sub>Temp</sub>	-	-	±3.5	°C	T <sub>a</sub> = 30°C

## ● ELECTRICAL CHARACTERISTICS ( unless otherwise specified, V<sub>DD</sub> = 3.0V, T<sub>a</sub> = 25°C )

PARAMETER	SYMBOL	LIMIT			UNIT	CONDITIONS
		MIN.	TYP.	MAX.		
Supply Current	I <sub>DD</sub>	-	16.0	20.0	μA	CTRL = 3.0V
<b>Analog Output</b>						
V <sub>Temp</sub> Output Voltage	V <sub>Temp</sub>	1.716	1.753	1.790	V	T <sub>a</sub> = 30°C
V <sub>Temp</sub> Temperature Sensitivity	V <sub>SE</sub>	-10.28	-10.68	-11.08	mV/°C	T <sub>a</sub> = -30 to 100°C
V <sub>Temp</sub> Load Regulation	ΔV <sub>TempRL</sub>	-	-	1	mV	difference of I <sub>OUT</sub> : 0μA / 2μA
<b>OS Output Open Drain</b>						
OS Leakage Current	I <sub>L</sub>	-	-	1.0	μA	OS : 5.0V
OS Output Voltage	V <sub>OL</sub>	-	-	0.4	V	I <sub>inos</sub> = 1.2mA
<b>CTRL</b>						
Input L Voltage	V <sub>IL</sub>	GND	-	0.6	V	
Input H Voltage	V <sub>IH</sub>	2.4	-	V <sub>DD</sub>	V	


Radiation hardiness is not designed.

● BDE0900G TEMPERATURE / OUTPUT FORMAT TABLE

CTRL INPUT L : Low, O : Open, H : High

TYPE	SENSING TEMPERATURE (°C)			OS Output FORMAT		MARKING
	CTRL					
	L	H	O			
BDE0900G	85	90	95	Open Drain	Active L	eD

● PACKAGE OUTLINES ( SSOP5 )

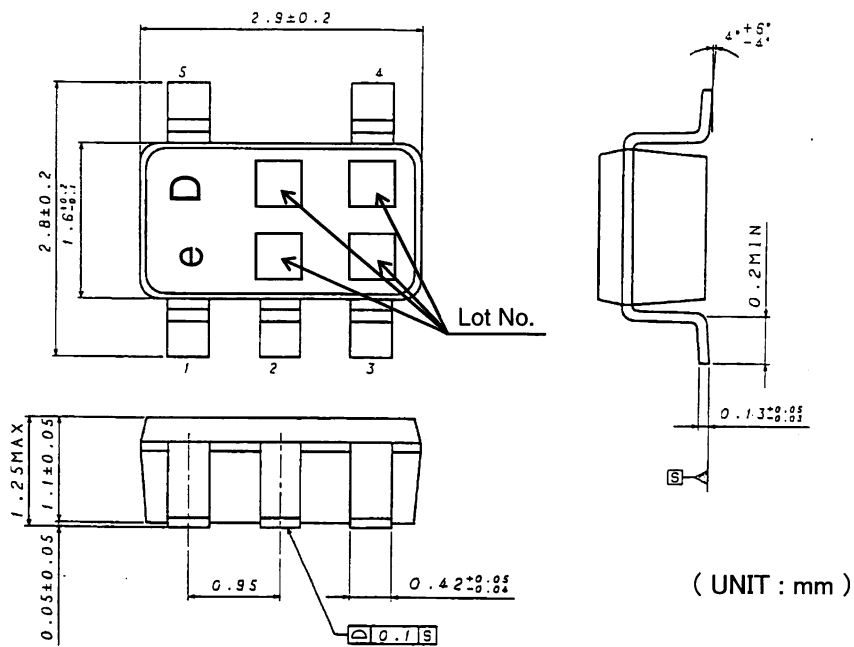

**● CAUTIONS ON USE****1) Absolute Maximum Ratings**

An excess in the absolute maximum ratings, such as supply voltage, temperature range of operating conditions, etc., can break down devices, thus making impossible to identify breaking mode such as a short circuit or an open circuit. If any special mode exceeding the absolute maximum ratings is assumed, consideration should be given to take physical safety measures including the use of fuses, etc.

**2) GND voltage**

Make setting of the potential of the GND terminal so that it will be maintained at the minimum in any operating state.

**3) Pin short and mistake fitting**

When mounting the IC on the PCB, pay attention to the orientation of the IC. If there is a placement mistake, the IC may be burned up.

**4) Operation in strong electric field**

Be noted that using ICs in the strong electric field can malfunction them.

**5) Mutual impedance**

Use short and wide wiring tracks for the power supply and ground to keep the mutual impedance as small as possible. Use a capacitor to keep ripple to a minimum.

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

**ROHM** Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

[www.rohm.com](http://www.rohm.com)

Contact us : [webmaster@rohm.co.jp](mailto:webmaster@rohm.co.jp)