

IEC Free Sockets - continued

Rewireable Free Sockets - continued

Black and White - continued

Mfrs. List No:	PX0587	= 117-2509	PX0587/WH	= 117-2511
	PX0587/SE	= 117-2510	PX0587/SE/WH	= 117-2512

249537

	Order Code	Price Each			
		1+	50+	100+	250+
Black					
Straight	117-2509	187.00	171.00	165.00	136.00
Right angle	117-2510	183.00	166.00	160.00	131.00
White					
Straight	NEW 117-2511	173.00	160.00	154.00	145.00
Right angle	NEW 117-2512	160.00	149.00	142.00	134.00

Rewireable Free Sockets



- Pillar terminals for reliable and speedy wiring
- Integral moulded cable clamp
- Captive threaded Screws
- Interlocking front faces for ease of assembly
- Straight and right angled versions
- Approvals, **BSI, VDE, CSA & UL Recognised**

Contact rating	10A @ 250V	Housing	Black nylon UL94V-0
		Contacts	Brass, Nickel plated

Mfrs. List No:	4782 = 112-5810	4785 = 112-5811	4781.01 = 112-5804	4784.01 = 112-5805
----------------	-----------------	-----------------	--------------------	--------------------

219732

	Order Code	Price Each					
		1+	50+	100+	250+	+	+
Straight	112-5810	155.00	132.00	110.00	93.00	--	--
Right Angle	112-5811	180.00	155.00	129.00	108.00	--	--
Straight Hot							
Condition	112-5804	137.00	117.00	98.00	82.00	--	--
Right Angled							
Hot Condition	112-5805	155.00	132.00	110.00	93.00	--	--

Rewireable Free Socket 16A



- Rewireable, line socket style connector
- Internal screw terminations and strain relief
- Approvals **VDE, SEMKO**

Current rating	16A
Voltage	250Vac

219744

Mfrs. List No.	Order Code	Price Each		
		1+	50+	100+
4795.0000	117-0114	352.00	301.00	251.00

Mains Connector

20A - High Power



- IEC320 C19 rewireable connector
- Wire Sizes (max) 3 x 2.5mm², 3 x 12AWG
- Overall cable diameter up to 12mm
- **CSA and VDE approvals**
- **UL Recognised**

Current rating Europe,	16A @ 250V	Mouldings	Nylon UL94V-0
Current rating North America	20A @ 250V	Approvals	UL, CSA, VDE, + IMQ Pending
Op Temp Range	-40°C TO + 70°C	Mating connector	PX0596, PX0598
		Accessories	Retaining Kit KT0012

248293


Mfrs. List No.	Order Code	Price Each		
		1+	25+	100+
PX0599.	428-6029	298.00	223.00	194.00
PX0599	999-7369	298.00	223.00	194.00

IEC Inlets

PCB Mounting



Rear views

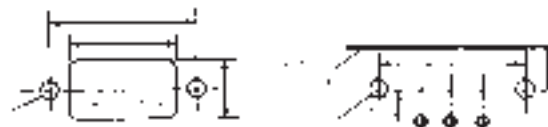

Panel cut-out

PCB drilling pattern

A right angle PCB mounting inlet manufactured to **BS4491.EN60.320** requirements, available with or without insulation cover. Approved to **BSI, VDE, CSA, SEMKO, IMQ and UL Recognised**

Contact rating	10A @ 250Vac	Housing	Black nylon UL94V-0
Temperature range	-40°C to +70°C	Contacts	Brass, Nickel plated

Mfrs. List No:	PX0580/PC = 313-853	PX0580/PC/12132 = 209-259
----------------	---------------------	---------------------------

209304

	Order Code	Price Each				
		1+	50+	100+	250+	+
Without cover	313-853	88.00	70.00	66.00	60.00	--
With cover	209-259	145.00	103.00	79.00	62.00	--

Switched and Fused 'Polysnap' Combinations



Single Pole Switched H=39.1, W=62.7
Cut out: H=34.4, W=60.3
Double Pole Switched H=39.1, W=74.5
Cut out: H=34.4, W=72.0
Fused Inlet/Outlet H=39.1, W=79.5
Cut out: H=34.4, W=76.5

- Horizontally mounted fused and/or switched inlets
- Snap-fit fixing for 1, 1.5, 2 and 3mm panel thicknesses
- Fusedrawer protected to **PC2, IEC127/6**
- Approvals include: **CSA, VDE, SEMKO, IMQ, SEV and UL Recognised**

Current rating	10A, 250V	Fuseholder	20mm x 5mm
----------------	-----------	------------	------------

209009

	Mfrs. List No.	Order Code	Price Each			
			1+	50+	100+	250+
Single Pole, Switched						
Non illuminated	BZH01/Z0000/01	561-228	284.00	236.00	201.00	172.00
Red illuminated	BZH01/Z0000/02	561-230	365.00	305.00	256.00	208.00
Red illuminated	BZH01/Z0000/02	999-7229	365.00	305.00	256.00	208.00
Double Pole, Switched						
Non illuminated	BZH01/Z0000/10	561-241	346.00	289.00	243.00	211.00
Red illuminated	BZH01/Z0000/11	561-253	418.00	349.00	294.00	253.00
Red illuminated	BZH01/Z0000/11	999-7237	418.00	349.00	294.00	238.00
Fused Inlet/Outlet	BZH11/Z0000/00	561-265	303.00	252.00	213.00	184.00

Switched 'Polysnap' Mini-Bezel



Single Pole, Non illuminated H=24, W=48.5
Cut-out: H=21.3, W=45.9
Single Pole, illuminated H=24, W=48.5
Cut out: H=21.3, W=45.9
Double Pole, illuminated H=24, W=57.5
Cut out: H=21.3, W=54.9

- Horizontally mounted switched mains inlets
- Snap fit fixing for 1.5mm panel thickness
- Approvals include: **BSI, VDE, IMQ, SEMKO, CSA, and UL Recognised**

Current rating	10A, 250V
----------------	-----------

209063

	Mfrs. List No.	Order Code	Price Each			
			1+	50+	100+	250+
Single Pole						
Non illuminated	BZM27/Z0000/53B	561-162	192.00	161.00	135.00	116.00
Red illuminated	BZM27/Z0000/55B	561-174	288.00	239.00	203.00	174.00
Red illuminated	BZM27/Z0000/55B	999-7180	288.00	239.00	203.00	174.00
Green illuminated	BZM27/Z0000/61B	561-204	359.00	301.00	253.00	206.00
Green illuminated	BZM27/Z0000/61B	999-7202	359.00	301.00	253.00	206.00