

POWER SUPPLY TRANSFORMERS




These transformers enable the Carel IR32/IRDR controllers or Tempatron TT32/TTDR timers to be supplied from 110Vac or 240Vac. They provide a low cost solution for mains operated systems and with a 3VA rating are useful for driving other low voltage monitors, alarms or control circuits that require a 12V supply.

SPECIFICATION

- Input voltage: 110Vac or 240 VAC @ 50/60Hz
- Input range: +/- 10% of nominal
- Output voltage: 12Vac
- Regulation: 13.8Vac (0mA), 10Vac (300mA)
- Max output: 3VA
- Weight: 200 gms

DIMENSIONS

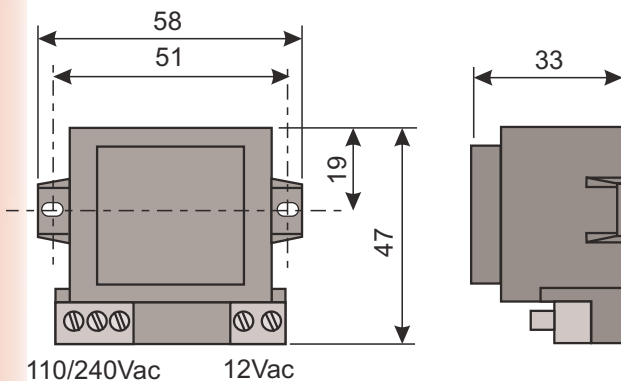

STANDARD ITEMS

Supply	Output	Part Number
240Vac	12Vac	TRA12UN100
110Vac	12Vac	TRA12UN111