


Length Mftrs. List No./Colour	Order Code	Price Each			
		1+	25+	50+	100+
<b>1500mm</b>					
ML150/1 RED	523-770	361.00	217.00	200.00	183.00
ML150/1 BLACK	523-781	365.00	219.00	201.00	185.00
ML150/1 BLUE	523-793	365.00	219.00	201.00	185.00
MLN 150/1 GREEN	828-1882	366.00	352.00	320.00	293.00
<b>2000mm</b>					
ML200/1 RED	523-800	412.00	246.00	227.00	209.00
ML200/1 BLACK	523-811	412.00	246.00	227.00	209.00
MLN 200/1 BLUE	828-1890	412.00	396.00	360.00	329.00
MLN 200/1 GREEN	828-1904	412.00	396.00	360.00	329.00
MLN 200/1 YELLOW	828-1912	412.00	396.00	360.00	329.00

**Cable Test Leads 50Ω**



Ready-made test and interconnection leads using RG58 cable and fitted moulded strain relief sleeves. Available in various cable lengths.

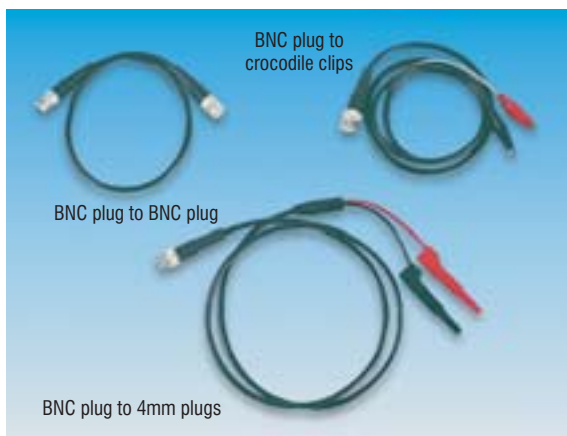

Cable Length	Order Code	Price Each			
		1+	10+	25+	50+
<b>BNC Plug to BNC Plug</b>					
0.5m	315-3472	518.00	473.00	444.00	399.00
1m	315-3484	528.00	485.00	468.00	434.00
2m	315-3496	707.00	632.00	558.00	523.00
<b>BNC Plug to Crocodile Clips</b>					
1m	315-3502	385.00	350.00	342.00	332.00
<b>BNC Plug to 4mm Plugs</b>					
1m	315-3514	454.00	412.00	402.00	390.00

**Dataloggers**

**Dataloggers  
175 / 177 Series**



The Testo 175 & 177 series data loggers provide simply and accurate solutions to on-site data acquisition.

- 175-T1**
  - Single channel - °C internal
  - Display
  - 7800 logged values
  - IP68 rated
- 175-T2**
  - Dual channel - °C internal and external
  - Display
  - 16000 logged values
  - IP68 rated

- 175-T3**
  - Dual channel thermocouple model - 2 x °C external thermocouples (sub miniature connector)
  - Display
  - 16000 logged values
  - IP54 rated
- 175-H1**
  - %RH and °C (internal)
  - 4700 logged values
- 175-H2**
  - %RH and °C (internal)
  - Display
  - 16000 logged values
- 175-S1**
  - mV and mA logger
  - 16000 logged values
- 177-H1**
  - Long term stable humidity sensor
  - Fast response time
- 177-T1**
  - Protective Caps for dirt-infested air or corrosive gases
- 177-T2**
  - Single channel deep freeze monitor
  - Suitable for down to -40°C
  - 48000 logged values
- 177-T3**
  - Internal °C + 2 x External °C + event contact
  - Long period monitor
  - Suitable for down to -40°C
  - 48000 logged values
  - Up to 5 years battery life
- 174-T4**
  - 4 x External probe sockets
  - Suitable for temperature extremes
  - Real time read outs
  - IP43 rated
  - 48000 logged values
  - Up to 5 years battery life

**Software**

The loggers can be programmed using the Comsoft 3 software, and data can be downloaded for further analysis.

**Interface:** Contains desktop holder and PC cable

**COMSOFT3 Basic:** Features diagram and spreadsheet functions. Supplied with PC interface and desktop holder.

**COMSOFT3 Pro:** Additional features include database analysis and graphic functions, data analysis and trend curves, Interface is not supplied, order code 501-0550.

**Measuring Range**

175-T1	-35°C to +70°C
175-T2	-35°C to +70°C (int); -40°C to +120°C (ext)
175-T3	-50°C to +1000°C (type K); -50°C to +400°C (type T)
175-S1	0 to 1V/0 to 10V; 0 to 20mA/4 to 20mA
175-H1	0 to 100% RH; -10°C to 50°C
175-H2	0 to 100% RH; -20°C to +70°C
177-T1	-40°C to +70°C
177-T2	-40°C to +70°C
177-T3	-40 to +120°C (probe dependant)
177-T4	-200 to +1000°C (probe dependant)

**Accuracy**

175-T1	±0.5°C (-20°C to +70°C); ±1°C (-35°C to -20.1°C)
175-T2	±0.5°C (-20°C to +70°C); ±1°C (-35°C to -20.1°C)
175-T3	±0.5°C (-20°C to +70°C); ±0.7% of reading
(without probes)	±1 digit (70.1°C to +1000°C)
175-S1	1mV (0 to 1V); 10mV (1 to 10V); 0.1mA (0 to 20mA)
175-H1	±3% RH; ±0.5°C
175-H2	±3% RH; ±0.5°C
177-T1	±0.4°C (-25 to +70°C); ±0.8°C (-40 to -25.1°C)
177-T2	±0.4°C (-25 to +70°C); ±0.8°C (-40 to -25.1°C)
177-T3	probe dependant
177-T4	probe dependant

339568.344015

Mftrs. List No.	Order Code	Price Each		
		1+	+	+
175-T1	501-0585	7,235.00	--	--
175-T2	501-0597	9,019.00	--	--
175-T3	501-0603	12,058.00	--	--
175-H1	501-0615	13,589.00	--	--
175-H2	501-0627	18,058.00	--	--
175-S1	501-0639	12,299.00	--	--

Test Equipment - Electrical / Environmental

26

Compliant  
Non-compliant  
+ Limited stock - RoHS replacement available  
**RoHS**