


Mftrs. List No.	Length	Width	Max. Bundle Dia.	Tensile Strength	
				(lbs)	(kg)
T80L-W	389	4.8	108	80	36.2
T120R-W	387	7.6	108	120	54.4
T150R-W	360	7.5	100	150	68.0
LK5-W	540	13.0	152	250	113.4

CAB663

Mftrs. List No.	Order Code	Price Per Pack			
		1+	5+	10+	50+
T18I-W	851-759				
T18R-W	851-723				
T30L-W	842-310				
T30R-W	851-772				
T40R-W	842-321				
T40L-W	842-333				
T50S-W	851-875				
T50J-W	842-345				
T80R-W	851-826				
T80L-W	851-851				
T120R-W	851-905				
T150R-W	842-357				
<b>50 Per Pack</b>		<b>Price Per Pack</b>			
LK5-W	851-930				

## Heat Stabilised Cable Ties

**HellermannTyton**

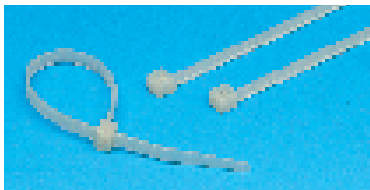

- One-piece non-releasable ties moulded in Natural Nylon 66
- Flame retardant to **UL94V-2**

Operating temperature -40°C to +105°C (+145°C for short periods)

Mftrs. List No.	Length	Width	Max. Bundle Dia.	Tensile Strength	
				(lbs)	(kg)
T18I-HS	144	2.5	36	18	8.1
T18R-HS	102	2.5	22	18	8.1
T18L-HS	200	2.5	49	18	8.1
T30R-HS	150	3.6	35	30	13.6
T50S-HS	151	4.8	36	50	22.7
T40R-HS	179	4.0	42	40	18.1
T30L-HS	200	3.6	49	30	13.6
T40L-HS	260	3.3	65	40	18.1
T80R-HS	204	4.7	50	80	36.2
T120R-HS	387	7.6	108	120	54.4
T150R-HS	360	7.5	100	150	68.0
T50I-HS	302	4.8	81	50	22.7
T80L-HS	389	4.8	108	80	36.2
LK5-HS	540	13.0	152	250	113.4

CAB664

Mftrs. List No.	Order Code	Price Per Pack			
		1+	5+	10+	50+
T18I-HS	851-747				
T18R-HS	851-711				
T18L-HS	851-735				
T30R-HS	851-760				
T50S-HS	851-863				
T40R-HS	851-796				
T30L-HS	851-784				
T40L-HS	851-802				
T80R-HS	851-814				
T120R-HS	851-899				
T150R-HS	851-917				
T50I-HS	851-838				
T80L-HS	851-840				
LK5-HS	851-929				

## Stainless Steel Cable Ties

**HellermannTyton**



- Non-releasable cable ties manufactured from marine grade 316 stainless steel
- Tough and corrosion resistant
- Lightweight and easy to handle

Operating temperature -80°C to +538°C

Mftrs. List No.	Length	Width	Max. Bundle Dia.	Tensile Strength	
				(lbs)	(kg)
MAT8SS7	230	7	60	100	45
MAT12SS7	330	7	90	100	45
MAT16SS7	430	7	120	100	45
MAT24SS7	630	7	180	100	45
MAT8SS12	230	12	60	150	68
MAT12SS12	330	12	90	150	68
MAT16SS12	430	12	120	150	68
MAT24SS12	630	12	180	150	68

FOR SUITABLE INSTALLATION TOOL SEE ORDER CODE 330-8613, **PAGE 155**

CAB662

Mftrs. List No.	Order Code	Price Each			
		1+	20+	50+	100+
MAT8SS7	841-985				
MAT12SS7	841-997				
MAT16SS7	842-000				
MAT24SS7	842-011				
MAT8SS12	842-023				
MAT12SS12	842-035				
MAT16SS12	842-047				
MAT24SS12	842-059				

## MAT Stainless Steel Ties

**HellermannTyton**

Ladder Locking Mechanism



- Non-releasable cable ties manufactured from marine grade 316 stainless steel coated in thermoplastic polyester
- Incorporates a ladder locking mechanism making the tie easy to install
- Tough and corrosion resistant
- Lightweight and easy to handle

Coating Operating Temp. -40°C to +70°C  
Tie operating temperature -80°C to +538°C

Length	Width	Maximum Bundle Dia.	Mftrs. List No.	Order Code
230	7.0	60	MAT8SSC7	330-8455
330	7.0	90	MAT12SSC7	330-8467
430	7.0	120	MAT16SSC7	330-8479
630	7.0	180	MAT24SSC7	330-8480
230	12.0	60	MAT8SSC12	330-8492
330	12.0	90	MAT12SSC12	330-8509
430	12.0	120	MAT16SSC12	330-8510
630	12.0	180	MAT24SSC12	330-8522


FOR SUITABLE INSTALLATION TOOL SEE ORDER CODE 330-8613, **PAGE 155**

CAB671

Mftrs. List No.	Order Code	Price Per Pack			
		1+	5+	10+	25+
MAT8SSC7	330-8455				
MAT12SSC7	330-8467				
MAT16SSC7	330-8479				
MAT24SSC7	330-8480				
MAT8SSC12	330-8492				
MAT12SSC12	330-8509				
MAT16SSC12	330-8510				
MAT24SSC12	330-8522				

## Stainless Steel Cable Tie Tool

**HellermannTyton**



- For use with Hellermann Tyton MAT ties
- Simple ratchet operation
- Tensioning and cutting facilities
- Lightweight and easy to use



Mftrs. List No.	Order Code	1+	5+	10+
MTT4	330-8613			

CAB668

continued

### Major International Brands

All the leading brand names from over 1,000 major international manufacturers.