

Heat Shrink Tubing — continued

RNF-100 — 2:1 Shrink Ratio (continued)

1.2m Lengths				Price Per Length				
Dia.	Mftrs.	Order						
Nom. Shrunk	List No.	Code	1+	5+	10+	25+	50+	
Red								
1.2	0.6	RNF-100-3/64-2	304-5353					
1.6	0.8	RNF-100-1/16-2	304-5365					
2.4	1.2	RNF-100-3/32-2	304-5377					
3.2	1.6	RNF-100-1/8-2	304-5389					
4.8	2.4	RNF-100-3/16-2	304-5390					
6.4	3.2	RNF-100-1/4-2	304-5407					
9.5	4.8	RNF-100-3/8-2	304-5419					
12.7	6.4	RNF-100-1/2-2	304-5420					
19.1	9.5	RNF-100-3/4-2	304-5432					
25.4	12.7	RNF-100-1-2	304-5444					
38.1	19.1	RNF-100-1-1/2-2	304-5456					
50.8	25.4	RNF-100-2-2	304-5468					
Yellow								
1.2	0.6	RNF-100-3/64-4	304-5470					
1.6	0.8	RNF-100-1/16-4	304-5481					
2.4	1.2	RNF-100-3/32-4	304-5493					
3.2	1.6	RNF-100-1/8-4	304-5500					
4.8	2.4	RNF-100-3/16-4	304-5511					
6.4	3.2	RNF-100-1/4-4	304-5523					
9.5	4.8	RNF-100-3/8-4	304-5535					
12.7	6.4	RNF-100-1/2-4	304-5547					
19.1	9.5	RNF-100-3/4-4	304-5559					
25.4	12.7	RNF-100-1-4	304-5560					
38.1	19.1	RNF-100-1-1/2-4	304-5572					
50.8	25.4	RNF-100-2-4	304-5584					
Green								
1.2	0.6	RNF-100-3/64-5	304-5596					
1.6	0.8	RNF-100-1/16-5	304-5602					
2.4	1.2	RNF-100-3/32-5	304-5614					
3.2	1.6	RNF-100-1/8-5	304-5626					
4.8	2.4	RNF-100-3/16-5	304-5638					
6.4	3.2	RNF-100-1/4-5	304-5640					
9.5	4.8	RNF-100-3/8-5	304-5651					
12.7	6.4	RNF-100-1/2-5	304-5663					
19.1	9.5	RNF-100-3/4-5	304-5675					
25.4	12.7	RNF-100-1-5	304-5687					
38.1	19.1	RNF-100-1-1/2-5	304-5699					
50.8	25.4	RNF-100-2-5	304-5705					
Blue								
1.2	0.6	RNF-100-3/64-6	304-5717					
1.6	0.8	RNF-100-1/16-6	304-5729					
2.4	1.2	RNF-100-3/32-6	304-5730					
3.2	1.6	RNF-100-1/8-6	304-5742					
4.8	2.4	RNF-100-3/16-6	304-5754					
6.4	3.2	RNF-100-1/4-6	304-5766					
9.5	4.8	RNF-100-3/8-6	304-5778					
12.7	6.4	RNF-100-1/2-6	304-5780					
19.1	9.5	RNF-100-3/4-6	304-5791					
25.4	12.7	RNF-100-1-6	304-5808					
38.1	19.1	RNF-100-1-1/2-6	304-5810					
50.8	25.4	RNF-100-2-6	304-5821					
White								
1.2	0.6	RNF-100-3/64-9	304-5833					
1.6	0.8	RNF-100-1/16-9	304-5845					
2.4	1.2	RNF-100-3/32-9	304-5857					
3.2	1.6	RNF-100-1/8-9	304-5869					
4.8	2.4	RNF-100-3/16-9	304-5870					
6.4	3.2	RNF-100-1/4-9	304-5882					
9.5	4.8	RNF-100-3/8-9	304-5894					
12.7	6.4	RNF-100-1/2-9	304-5900					
19.1	9.5	RNF-100-3/4-9	304-5912					
25.4	12.7	RNF-100-1-9	304-5924					
38.1	19.1	RNF-100-1-1/2-9	304-5936					
50.8	25.4	RNF-100-2-9	304-5948					
Clear								
1.2	0.6	RNF-100-3/64-X	304-7726					
1.6	0.8	RNF-100-1/16-X	304-7738					
2.4	1.2	RNF-100-3/32-X	304-7740					
3.2	1.6	RNF-100-1/8-X	304-7751					
4.8	2.4	RNF-100-3/16-X	304-7763					
6.4	3.2	RNF-100-1/4-X	304-7775					
9.5	4.8	RNF-100-3/8-X	304-7787					
12.7	6.4	RNF-100-1/2-X	304-7799					
19.1	9.5	RNF-100-3/4-X	304-7805					
25.4	12.7	RNF-100-1-X	304-7817					
38.1	19.1	RNF-100-1-1/2-X	304-7829					
50.8	25.4	RNF-100-2-X	304-7830					

CRN Flame Retardant – 2:1 Shrink Ratio



- Semi-rigid, flame retardant Black polyolefin tubing
- Ideal for wire strain relief applications such as soldered or crimp connections, wire splices and terminations
- Provides high abrasion resistance and mechanical protection for delicate components
- Outstanding physical and electrical performance
- Excellent chemical and solvent resistance properties

New

- 2:1 shrink ratio
- UL/CSA, MIL-DTL-23053/6, Class 1 and Def. Stan. 59-97 Issue 3 Type 2C approved
- Minimum shrink temperature +110°C
- Operating temperature -55°C to +135°C

CAB672

1.2m Lengths

1.2m Lengths			Price Per Length				
Dia.	Mftrs.	Order Code					
Nom. Shrunk	List No.		1+	5+	10+	25+	50+
1.2	0.6	CRN-3/64-0	341-5399				
1.6	0.8	CRN-1/16-0	341-5405				
2.4	1.2	CRN-3/32-0	341-5417				
3.2	1.6	CRN-1/6-0	341-5429				
4.8	2.4	CRN-3/16-0	341-5430				
6.4	3.2	CRN-1/4-0	341-5442				
9.5	4.8	CRN-3/8-0	341-5454				
12.7	6.4	CRN-1/2-0	341-5466				

GPT Thick Wall Tubing



- Black, thick wall, rugged polymer tubing
- Moisture, fungus and weather resistant
- Excellent electrical properties
- For use where insulation, abrasion resistance and strain relief are required
- Up to 3:1 shrink ratio
- ABS, DNV and Lloyds approved

New

- Minimum shrink temperature +90°C
- Minimum full recovery temperature +121°C
- Operating temperature -55°C to +90°C


Mftrs. List No. GPT 10/4 = 341-5661, GPT 19/6 = 341-5673, GP T43/13 = 341-5685, GPT 69/23 = 341-5697, GPT 114/45 = 341-5703

CAB674

1.2m Lengths

1.2m Lengths			Price Per Length				
Dia.	Nom. Wall Thick.	Order Code					
Nom. Shrunk			1+	5+	10+	25+	50+
10.2	3.9	1.5	341-5661				
19.1	5.6	2.4	341-5673				
43.2	12.7	3.0	341-5685				
68.6	22.9	3.9	341-5697				
114.3	44.5	3.9	341-5703				

HSR-FR Semi-Rigid – High Shrink Ratio

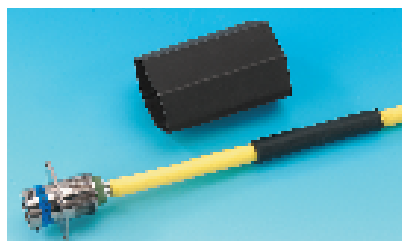

New

- Black, semi-rigid tubing
- High expansion ratio designed to accommodate large size differences
- Tough and durable
- Offers excellent insulation and abrasion protection
- Flame retardant
- ABS, DNV and Lloyds approved
- 5.6:1 shrink ratio
- Minimum shrink temperature +120°C
- Operating temperature -55°C to +90°C

CAB673