

## Cable Glands — Continued

### Steel Wire Armoured Cable Glands




	No of Glands, Shrouds, Tags & Locknuts per Kit/Pack	Outer Sheath Min	Cable Dia Max
<b>Indoor BWK Gland Packs</b>			
20SBWK	2	12.9	15.8
20BWK	2	15.5	20.8
25BWK	2	20.3	27.2
32BWK	2	27.2	33.5
40BWK	1	33.5	40.5
50BWK	1	45.2	53.5
<b>Outdoor CWK Gland Packs</b>			
20SCWK	2	12.9	15.8
20CWK	2	15.5	20.8
25CWK	2	20.3	27.2

CAB637

Mfrs. List No.	Order Code	1+	5+	10+	25+	50+
20SBWK	725-7405					
20BWK	725-7417					
25BWK	725-7429					
32BWK	725-7430					
40BWK	725-7442					
50BWK	725-7454					
20SCWK	725-7466					
20CWK	725-7478					
25CWK	725-7480					

### IP66 – Steel – ‘Shureseal’™

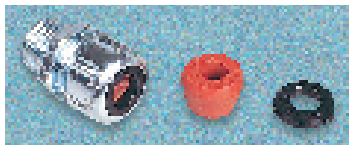

A high strength steel body incorporating a neoprene compression seal and non-corrosive thrust washer which does not age or lose its grip after long use. It is **UL** approved and passes stringent performance tests such as 'driving rain', cutting oil and paraffin splash.

Entry connection M20 mounting thread  
Operating temperature +70°C max.

**Note:** When using Order Code 9524 remove sufficient outer covering of cable to permit conductors to pass through connector body.







Cable Dia.	Mfrs. List No.	Order Code	1+	25+	100+
3.2 – 6.3	9520	303-264			
6.3 – 9.5	9521	303-276			
9.5 – 12.7	9522	303-288			
11.4 – 14.2	9523	303-290			
12.7 – 15.8	9524	303-306			




131X

## Cable Protector

### Snap Fit® and Snap Top® Rubber Cable Protectors

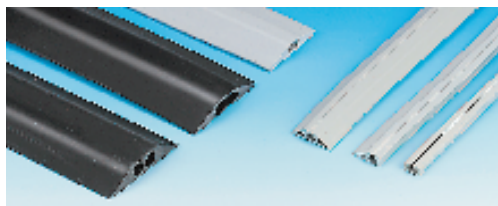

Snap Fit – Low Profile



Snap Top – Micro Profile

- No need to thread cables through profile or use knife to slit moulding
- **Snap Fit** – membrane in base easily opened to allow cable insertion then snaps back into place. Moulding can then be positioned on floor area. Adhesive tape not supplied but can be used if required
- **Snap Top** – membrane in top for cable insertion. Moulding then fixes in position using double-sided adhesive foam tape supplied
- UV stabilised for outdoor use
- Halogen free, low smoke and fume
- Fire retardant to **BS476 Part 7 Class 3, DIN4102 Part 1 and Class B1**

CAB611

Profile	Colour	Length	Order Code	Price Per Length		
				1+	5+	10+
Standard	Black	1m	303-0246			
	Grey	1m	303-0258			
	Black	3m	303-0260			
	Grey	3m	303-0271			
Type B	Black	1m	303-0283			
	Grey	1m	303-0295			
	Black	3m	303-0301			
	Grey	3m	303-0313			
Type D	Black	1m	303-0325			
	Grey	1m	303-0337			
	Black	3m	303-0349			
	Grey	3m	303-0350			
Snap Top	Grey	9m	303-0362			
	Grey	9m	303-0374			
	Grey	9m	303-0386			
	Grey	9m	303-0386			

## Cable Guard




- Prevents people from tripping over cables and wiring routed over floors
- Protects cables and wires
- Flexible vinyl material which can easily be cut to length
- Cables slip into slit in base
- Supplied with double sided adhesive tape for fixing to carpet, tile or concrete floors

484

Width	Colour	Mfrs. List No.	Order Code	1+	5+	10+
31.8mm	Ivory	FG1E16-A	726-758			
31.8mm	Black	FG1BL6-A	726-760			
31.8mm	Safety Yellow	FG1YL6-A	726-771			
62.0mm	Ivory	FG3E16S-A	726-783			
62.0mm	Black	FG3BL6S-A	726-795			
62.0mm	Safety Yellow	FG3YL6S-A	726-801			

## Cable Reel Holders

### Bench/Wall Mounting

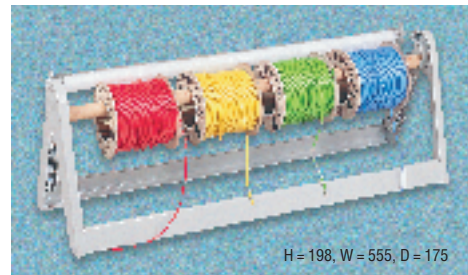

H = 198, W = 555, D = 175

Manufactured from pressed steel with an 18mm wooden cable reel support rod. The reel holder is suitable for either bench or wall mounting. Screw holes are revealed by removing four rubber feet. A sprung foam edged tension bar prevents the cable from reeling out excesses of cable. Supplied with five hardboard reel separators.

Maximum reel diameter	254	Colour	Grey
Maximum combined reel width	520		

157X

Order Code	1+	4+	8+	16+
145-461				