

- Non-flammable PVC free construction. No toxic fumes in the event of fire.
- Quick fixing snap-on covers, largest size has quick release screws
- Seven knockouts three fitted with universal entry seals (3.5 to 25.5mm \varnothing cable)
- Temperature resistant up to +100°C


Best Value

BOX103

H	W	D	Order Code	Price Each				
				1+	10+	50+	100+	500+
75	75	42	.531-704					
85	85	42	.531-716					
90	90	45	.531-728					
113	113	58	.531-730					

Junction/Terminal IP65, PS

spelsberg
Installationsmaterial mit Pfiff

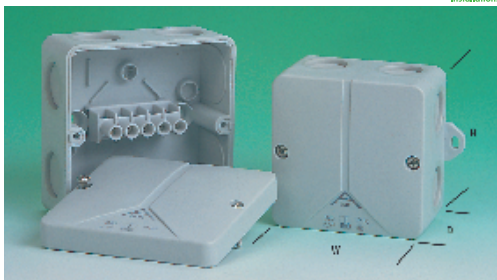


- Self sealing membrane allows cables to be pushed into box without cable glands
- Operational temperature range -10°C to +80°C
- Standard finish light grey (RAL7035)
- Optional easy to fit terminal blocks
- Available with lugs for easy installation
- Flammability tested to **UL94V-2**
- Sizes 3 to 6 have knockouts for membrane glands (supplied), sealed to **IP54**

BOX133

Ext'nal Dimensions			No. of Size Knockouts	Mftrs. List No.	Order Code	Price Each		
H	W	D				1+	10+	25+
Enclosures								
80	80	52	1	8	802-907	.651-667		
93	93	55	2	8	804-907	.651-679		
110	110	67	3	8	806-907	.651-680		
140	140	79	4	10	810-910	.651-692		
Enclosure with Lugs								
80	80	52	1	8	803-907	.651-722		
Terminal Blocks (5 Pole)								
			1&2	—	840-004	.651-734		
			3	—	840-006	.651-746		
			4	—	840-010	.651-758		

Junction/Terminal - 'DPN Range' IP56, ABS

Himel

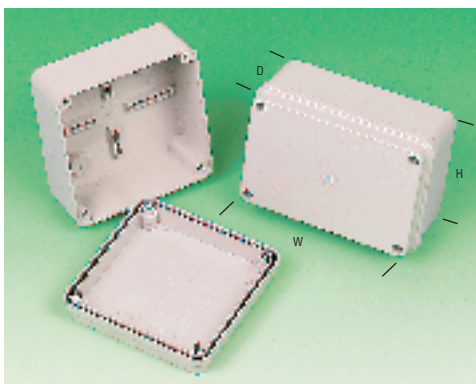

- Double insulated junction boxes, sealed to **IP56**
- Self-Extinguishing light grey ABS
- Base has slots for fixing equipment with self tapping screws
- Mounting plate available (except for 161-706 and 161-718)

BOX246

H	W	D	Order Code	Price Each			
				1+	5+	10+	25+
Boxes							
103	103	56	161-706				
83	123	60	161-718				
114	152	76	161-720				
144	194	78	161-731				
194	244	92	161-743				
226	306	124	161-755				
310	389	128	161-767				

Power Supply & Plug Cases

Power Supply - 'PS Series' ABS

PACINTEC GMBH

New




- Wide range of applications
- Moulded in ABS
- Stylish design - contoured top cover
- Snap together assembly, safety-retained by one screw
- Recessed top allows for switches and overlays
- All necessary hardware supplied (1 screw)

BOX280

External Dimensions				Colour	Order Code	Price Each		
H	W	D	1+			25+	50+	
48	82	149		Black	318-4444			
48	82	149		PC bone	318-4456			

In-Line Power Supply Case ABS (STD and Flame Retardant)

multicomp

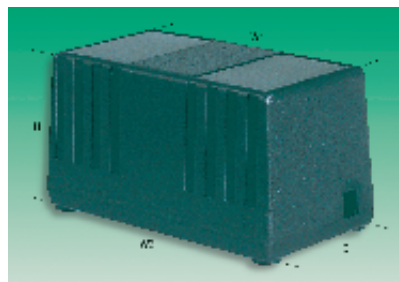

H = 62, W₁ = 112, W₂ = 117, D = 63

- Attractive rugged appearance, moulded in black ABS
- Will house E154, S35 or S147 size transformers
- Top and base held together by self-tapping screws
- Recessed holes designed to accept standard 9mm self adhesive feet
- Available in flame retardant ABS to **UL94V-0**

Note: S35 transformers include 12VA PCB mounting and 12VA clamp mounting types. S147 transformers include 20VA clamp mounting types see section 34.

Mftrs List No. PS2 = 531-844, PS2FR = 645-771

BOX107

Type	Order Code	Price Each			
		1+	50+	100+	500+
Standard	531-844				
Flame Retardant	645-771				

continued

Major International Brands

All the leading brand names from over 1,000 major international manufacturers.