

BNC Connectors and Terminators

'T' Adaptor and Insulating Cover

Cover H = 19.5, W = 80.5, D = 32.2



- The T-adaptor has a nickel plated body and gold plated centre contacts
- Impedance is 50Ω
- A single piece, snap-together black plastic cover protects against accidental grounding or dis-connection.

Mfrs. List No. BNC-TB = 152-083, VBA109 = 251-197

NET67

T-adaptor Cover	Order Code	Price Each				
		1+	25+	100+	250+	500+
	251-197					
	.152-083					

Thin Ethernet Terminator (1 Watt)

tyco / Electronics



Resistor plug Resistor plug with earth
L = 25.9, Dia = 14.3

- Resistor plugs for terminating thin ethernet networks
- Bright nickel plated bodies with gold plated contacts
- Impedance is 50Ω.


Mfrs. List No. B35X06J501X99 = 251-185, B35Z98J501X99 = 251-173

NET66

Plug Plug with earth	Order Code	Price Each			
		1+	5+	10+	25+
	251-173				
	251-185				

Thin Ethernet® Crimp Plugs, 50Ω

tyco / Electronics



- Bright nickel plated body, and gold plated centre contact
- The insulated plug has a grey plastic cover, and matching strain relief sleeve

Suitable cable Belden 9907, UR76; RG58CU
Mfrs. List No. B35A04JB10599 = 152-313, B35A41JB10X99 = 251-136

NET65

Standard Insulated	Order Code	Price Each				
		1+	10+	50+	150+	250+
	251-136					
	.152-313					


Bulkhead Jack 50Ω

tyco / Electronics



Straight

- Bright nickel plated bodies and gold plated centre contacts



Panel cut-out
Bulkhead thickness = 7 max

Suitable cable Belden 9907, RG58 C/U, UR76 Mfrs. List No. B35H45JB10X99 = 251-148

NET64

Straight	Order Code	Price Each				
		1+	10+	50+	150+	250+
	251-148					

Ethernet Cable (Coax)

Thin Ethernet Cable Assemblies

Videk



- RG58 50Ω Cable
- Foil and braid double shielded
- Complete with moulded strain relief boots
- Fitted with BNC male connector at both ends
- Fully tested

NET703

0.3m BNC Assembly 1m BNC Assembly 2m BNC Assembly 3m BNC Assembly 5m BNC Assembly 10m BNC Assembly 20m BNC Assembly 50m BNC Assembly	Order Code	Price Each		
		1+	10+	50+
	977-561			
	977-391			
	977-408			
	977-410			
	977-421			
	977-433			
	977-445			
	977-457			

Terminator Socket 50Ω

tyco / Electronics



- Incorporating an earthing terminal
- For use with Ethernet® networks.

L = 37.7, Dia = 20.5

Mfrs. List No. N15X43J999X99

CA163

Order Code	1+	10+	Price Each			
			50+	150+	250+	500+
152-566						

Safetap System

Safetap® Thin Ethernet Access Port

VITELEC



- Make-before-break switching preserves network integrity.
- Supports commonly used BNC access leads.
- Precision engineered with gold plated contacts.
- Tamper-proof design.

- Housed in a metal enclosure which provides effective shielding from EMI/RFI interference
- Available in two versions

Surface Mount This unit is housed in a low profile Thorsman's data box with a fixing plate compatible with European standard conduit boxes. Adequate space is left in the databox for installation wiring; internal connection is via two BNC connectors and straight BNC plugs can be used whilst keeping within IEEE 802-3 bend radius limits.

Flush Mount Mounted behind a white moulded plastic faceplate, this unit is suitable for flush mounting using a suitable wall box. (minimum depth 18mm).


NET110

Surface mount port Flush mount port	Order Code	Price Each		
		1+	10+	50+
	.292-643			
	480-060			

FCC 68 Style Connectors and Tooling

IDC Plugs

4/4, 6/4, 6/6
and 8/8 Way

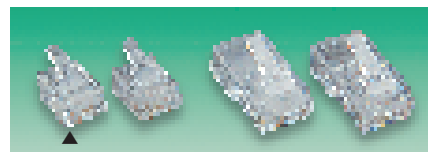

▲Denotes pin 1

4 and 6 way, short body

8 way, long body

- IDC plugs commonly used in both telecommunications and computer equipment.
- Two styles – handset and standard line plugs with a wide contact area for ease of crimping
- The handset plugs are mostly used to interconnect a telephone handset to the base unit
- The 8 way 8 contact version is also available with a polarising side key and is mainly used in computer applications