



PCB Power Relays — continued

DIN Mount Socket & Accessories - 40 Series.

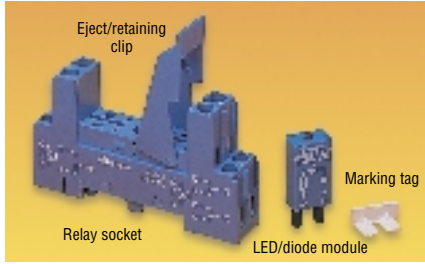

● A range of sockets and accessories to complement the 40 Series relays

Load rating	12A, 250V ac	Housing Blue	PA66
Mfrs. List No.	9583 = 735-681, 09820 = 735-711, 9980-0230-09 = 323-5208,	9585 = 735-693, 9980-3000-00 = 323-5180, 9980-0230-50 = 323-5210,	09591 = 735-700, 9980-0230-08 = 323-5191, 9980-9024-90, 735-772


rel201

	Order Code	1+	25+	100+	250+	500+
Sockets						
3.5mm socket for 4031 relay	735-681					
5mm socket for 4052 4061 relay	735-693					
Accessories						
Order Multiple=5		5+	25+	100+	250+	500+
Eject retaining clip for sockets	735-700					
Order Multiple=20		20+	100+	200+	500+	
Marking tag for sockets	735-711					
Order Multiple=1		1+	25+	100+	250+	500+
Diode module 6-220Vdc	NEW 323-5180					
Varistor module 110 to 230Vac	NEW 323-5191					
RC module 110 to 230V ac/dc	NEW 323-5208					
LED module 110 to 230V ac/dc	NEW 323-5210					
Diode and LED module 6 to 24V dc	735-772					

8A/12A/16A Low Profile — 41 Series



H = 15.7 W = 12.7 D = 29

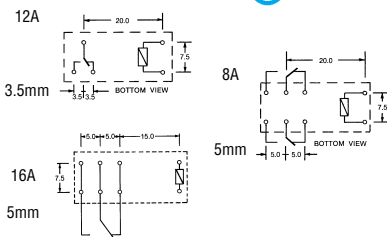

- Low profile only 15.7mm high
- SPCO and DPCO options
- 8mm between coil and contacts in accordance with VDE0700
- UL, CSA and VDE approved





Contact arrangement	SPCO/DPCO	Coil consumption	0.75VA/AC, 400mW/DC
Contact rating	12A @ 240V ac, 28V dc	Operate/Release	7ms/8ms
	16A @ 240V ac, 28V dc	Coil operating range	75-150%/AC, 70-255%/DC
	8A @ 240V ac, 28V dc	Temperature range	-40°C to +85°C
Contact material	AgNi		

rel265

COIL	Volts	Ω	Order Code	Price Each				
				1+	25+	100+	250+	500+
SPCO, 12A — 41.31 Series								
24Vac	350		321-0170					
110Vac	8100		321-0182					
230Vac	32500		321-0194					
5Vdc	62		321-0212					
6Vdc	90		321-0224					
12Vdc	360		321-0236					
24Vdc	1440		321-0248					
48Vdc	5520		321-0250					
SPCO, 16A — 41.61 Series								
24Vac	350		321-0261					
110Vac	8100		321-0273					
230Vac	32500		321-0285					
12Vdc	360		321-0315					
24Vdc	1440		321-0327					
48Vdc	5520		321-0339					
SPCO, 8A - 41.52 Series								
24Vac	350		321-0340					
110Vac	8100		321-0352					
230Vac	32500		321-0364					
5Vdc	62		321-0376					
6Vdc	90		321-0388					
12Vdc	360		321-0390					
24Vdc	1440		321-0406					
48Vdc	5520		321-0418					

DIN Rail Bases and Clips

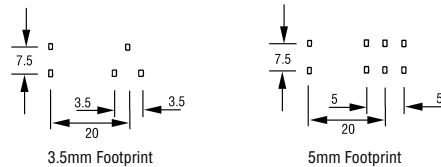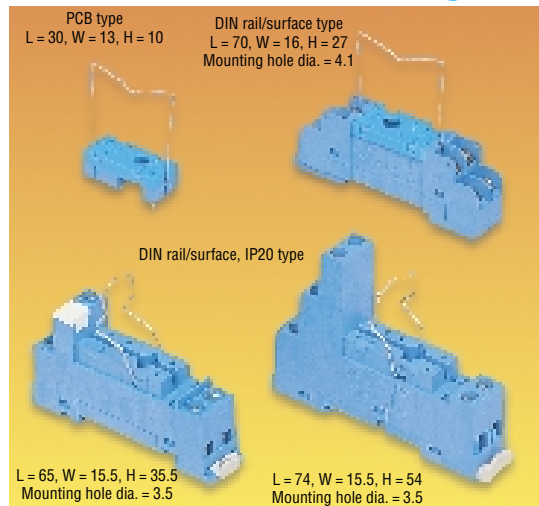

- Sockets and clips for use with 3.5mm and 5mm pin spacing 'Vertical' style PCB power relays, including Finder 40 series
- PCB sockets are **UL, SEV** and **CSA** (10A) approved
- DIN rail/surface sockets Order Codes 431-412 and 431-424 are **UL, SEV, SETI** and **CSA** (5A) approved
- DIN rail/surface sockets Order Codes 466-578 and 492-036 have touchproof terminals to **IP20**. Both will accept an additional module to give the facilities of protection diode and/or LED indication, 466-578 has an identification tab, and is approved to **SEV** and **CSA**. 492-036 is approved to **UL**.

Load rating	466-591, 466-608, 431-412, 431-424:	10A 250V ac (5A max. each circuit)
	466-578, 492-036:	10A 250V ac
Housing	Blue noryl, UL94V-0B	
Mfrs. List No.	9513 = 466-591, 9545 = 431-424,	9515 = 466-608, 9563 = 466-578,
		9543 = 431-412, 9575 = 492-036

rel124

	Order Code	1+	25+	100+	250+	500+
3.5mm, PCB	466-591					
5mm, PCB	466-608					
3.5mm, DIN rail/surface	431-412					
5mm, DIN rail/surface	431-424					
3.5 mm, DIN rail/surface, IP20	466-578					
5mm, DIN rail/surface, IP20	492-036					