





Washable PCB Mounting 0.4VA @ 20V ac/dc



Washable PCB Mounting 0.4VA @ 20V ac/dc

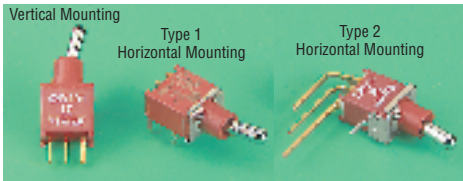


PCB drilling plans

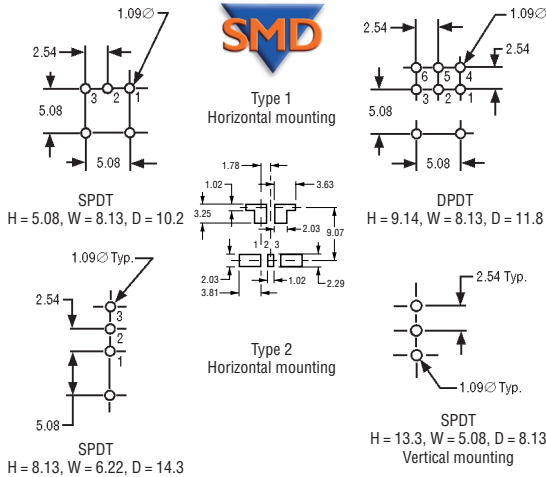

- Process sealed – withstands machine soldering and pressure wash processes
 - Epoxy sealed terminations
- Contact resistance ≤10mΩ
 Electrical life 40,000 ops
 Operating temperature -30°C to +85°C
- Mfrs. List Nos: ET01MD1ABE = 103-184, ET01MD1AVBE = 103-378, ET01MD1CBE = 103-007, ET03MD1ABE = 103-196, ET03MD1AVBE = 103-380, ET03MD1CBE = 103-019, ET05MD1CBE = 103-020, ET07MD1ABE = 103-214, ET07MD1AVBE = 103-421, ET07MD1CBE = 103-032, ET08MD1ABE = 103-226, ET08MD1CBE = 103-044, ET23MD1ABE = 103-251

SW266
SW266A

	Order Code	Price Each				
		1+	25+	50+	100+	500+
Vertical Mounting						
SPDT – on-on	.103-007					
SPDT – on-off-on	.103-019					
SPDT – mom-off-mom	103-020					
SPDT – on-off-mom	103-032					
SPDT – on-mom	103-044					
Type 1 – Horizontal Mounting						
SPDT – on-on	.103-184					
SPDT – on-off-on	.103-196					
SPDT – on-off-mom	103-214					
SPDT – on-mom	103-226					
DPDT – on-off-on	.103-251					
Type 2 – Horizontal Mounting						
SPDT – on-on	.103-378					
SPDT – on-off-on	.103-380					
SPDT – on-off-mom	103-421					

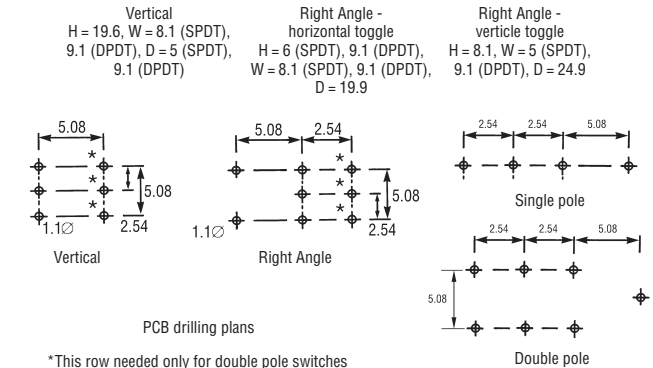

- Case material meets **UL94V-0**
 - Gold plated contacts allow low current switching
 - Fully sealed by 'O' ring within bush
 - Suitable for wave soldering at 260°C for 5 seconds
- Initial contact resistance <10mΩ
 Insulation resistance 1000MΩ min
 Dielectric strength 1000V rms @ 50Hz
- Electrical life: 2 position 100,000 ops
 3 position 50,000 ops
 Operating force 220g
 Operating temperature -20°C to +85°C

Mfrs. List No.	TL36P0050 = 150-559,	TL39P0050 = 150-560,	TL46P0050 = 150-562,
	TL49P0050 = 150-563,	TL36W0050 = 150-564,	TL39W0050 = 150-565,
	TL46W0050 = 150-567,	TL49W0050 = 286-011,	TL36WW050 = 286-023,
	TL32WW050 = 607-344,	TL46WW050 = 286-047,	TL49WW050 = 607-356

	Order Code	Price Each				
		1+	25+	50+	100+	500+
Vertical Mounting						
SPDT – on-on	.150-559					
SPDT – on-off-on	.150-560					
DPDT – on-on	.150-562					
DPDT – on-off-on	.150-563					
Right Angle - Horizontal Toggle						
SPDT – on-on	.150-564					
SPDT – on-off-on	.150-565					
DPDT – on-on	.150-567					
DPDT – on-off-on	.286-011					
Right Angle - Vertical Toggle						
SPDT – on-on	.286-023					
SPDT – on-mom	607-344					
DPDT – on-on	.286-047					
DPDT – on-off-on	.607-356					

continued

Can't find it in the Catalogue?

Then contact (65) 788 0200 for contact to 2 million extra products from 350 manufacturers.

Can't find it in the Catalogue?

Then contact (65) 788 0200 for contact to 2 million extra products from 350 manufacturers.

Major International Brands

All the leading brand names from over 1,000 major international manufacturers.