
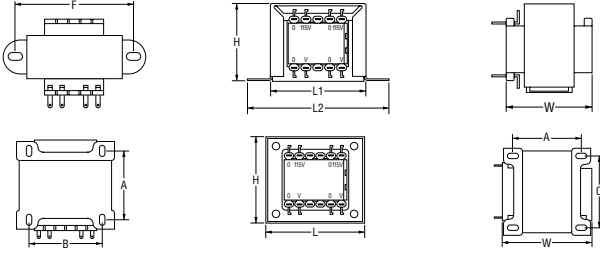


## Single 230V or Dual 115+115V Primary 6VA to 200 VA

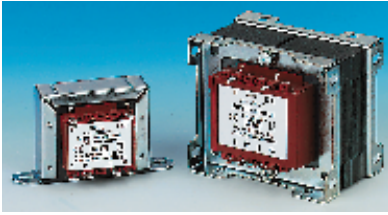

Rated VA	REG %	Dimensions			Fixings			wt. kg
		L1/L2	W.#	H	F	Size		
6	24	45/68	35.5	37.5	55	4BA	0.17	
12	12	60/90	47	50	74	2BA	0.38	
20	12	60/90	52	50	74	2BA	0.53	
50	10	79/106	60	66	93.9	2BA	0.98	

# Excludes Tags

Rated VA	REG %	Dimensions			Fixings			Size	wt. kg
		L	W.#	H	B	C			
75	8	80	71	67	55	54	4BA	1.48	
100	10	89	65	75	44	57	M5	1.55	
200	8	102	85	85	68	72	M5	2.75	

# Excludes Tags

- Harmonised European input voltage in single (230V) or dual (115V) primary winding
- Flame retardant materials to **UL94V-0**
- Terminations suitable for solder or 'push on' connections (6VA solder tag only)
- Double section bobbin construction
- Fully shrouded windings
- Suitable for 50/60Hz operation
- 100% electrical & 4.8kV flash testing
- Two hole fixing wrap-over clamp up to and including 50VA, multi hole frame fixing for 75VA and above
- Optional terminal shroud up to 100VA
- Designed, manufactured and tested in accordance with **BS3535**, **EN60742\*** and **EN60950**

\* Requires additional fuse protection

TR95 TR95A

230V Single Primary	Mfrs. List No.	Order Code	Price Each			
			1+	20+	50+	100+
<b>6VA - 3VA per secondary winding</b>						
0-6V, 0-6V @ 0.5A	D3024	<b>159-554</b>				
0-9V, 0-9V @ 0.33A	D3025	<b>159-566</b>				
0-12V, 0-12V @ 0.25A	D3026	<b>159-578</b>				
0-15V, 0-15V @ 0.2A	D3027	<b>159-580</b>				
Terminal shroud		<b>177-221</b>				
<b>12VA - 6VA per secondary winding</b>						
0-6V, 0-6V @ 1.0A	D3032	<b>159-591</b>				
0-9V, 0-9V @ 0.66A	D3033	<b>159-608</b>				
0-12V, 0-12V @ 0.50A	D3034	<b>159-610</b>				
0-15V, 0-15V @ 0.40A	D3035	<b>159-621</b>				
Terminal shroud		<b>177-222</b>				
<b>20VA - 10VA per secondary winding</b>						
0-6V, 0-6V @ 2.0A	D3040	<b>159-633</b>				
0-9V, 0-9V @ 1.1A	D3041	<b>159-645</b>				
0-12V, 0-12V @ 1.0A	D3042	<b>159-657</b>				
0-15V, 0-15V @ 0.80A	D3043	<b>159-669</b>				
Terminal shroud		<b>177-222</b>				
<b>50VA - 25VA per secondary winding</b>						
0-6V, 0-6V @ 4.17A	D3048	<b>159-670</b>				
0-9V, 0-9V @ 2.78A	D3049	<b>159-682</b>				
0-12V, 0-12V @ 2.0A	D3050	<b>159-694</b>				
0-15V, 0-15V @ 1.6A	D3051	<b>159-700</b>				
Terminal shroud		<b>177-223</b>				
<b>75VA - 37.5VA per secondary winding</b>						
0-6V, 0-6V @ 6.25A	D3056	<b>159-712</b>				
0-9V, 0-9V @ 4.17A	D3057	<b>159-724</b>				
0-12V, 0-12V @ 3.120A	D3058	<b>159-736</b>				
0-15V, 0-15V @ 2.5A	D3059	<b>159-748</b>				
0-50V, 0-50V @ 0.75A	D3060	<b>159-750</b>				
Terminal shroud		<b>177-223</b>				
<b>100VA - 50VA per secondary winding</b>						
0-9V, 0-9V @ 5.55A	D3066	<b>159-761</b>				
0-12V, 0-12V @ 4.17A	D3067	<b>159-773</b>				
0-15V, 0-15V @ 3.33A	D3068	<b>159-785</b>				
0-50V, 0-50V @ 1.0A	D3069	<b>159-797</b>				
Terminal shroud		<b>177-223</b>				

continued

		Price Each			
		1+	20+	50+	100+
<b>200VA - 100VA per secondary winding</b>					
0-9V, 0-9V @ 11.1A	D3074	<b>159-803</b>			
0-12V, 0-12V @ 8.3A	D3075	<b>159-815</b>			
0-15V, 0-15V @ 6.67A	D3076	<b>159-827</b>			
0-50V, 0-50V @ 2.0A	D3077	<b>159-839</b>			
<b>115+115V Primary</b>					
<b>6VA - 3VA per secondary winding</b>					
0-6V, 0-6V @ 0.5A	D3028	<b>159-840</b>			
0-9V, 0-9V @ 0.33A	D3029	<b>159-852</b>			
0-12V, 0-12V @ 0.25A	D3030	<b>159-864</b>			
0-15V, 0-15V @ 0.2A	D3031	<b>159-876</b>			
Terminal shroud		<b>177-221</b>			
<b>12VA - 6VA per secondary winding</b>					
0-6V, 0-6V @ 1.0A	D3036	<b>159-888</b>			
0-9V, 0-9V @ 0.66A	D3037	<b>159-890</b>			
0-12V, 0-12V @ 0.50A	D3038	<b>159-906</b>			
0-15V, 0-15V @ 0.40A	D3039	<b>159-918</b>			
Terminal shroud		<b>177-222</b>			
<b>20VA - 10VA per secondary winding</b>					
0-6V, 0-6V @ 2.0A	D3044	<b>159-920</b>			
0-9V, 0-9V @ 1.1A	D3045	<b>159-931</b>			
0-12V, 0-12V @ 1.0A	D3046	<b>159-943</b>			
0-15V, 0-15V @ 0.80A	D3047	<b>159-955</b>			
Terminal shroud		<b>177-222</b>			
<b>50VA - 25VA per secondary winding</b>					
0-6V, 0-6V @ 4.17A	D3052	<b>159-967</b>			
0-9V, 0-9V @ 2.78A	D3053	<b>159-979</b>			
0-12V, 0-12V @ 2.0A	D3054	<b>159-980</b>			
0-15V, 0-15V @ 1.6A	D3055	<b>159-992</b>			
Terminal shroud		<b>177-223</b>			
<b>75VA - 37.5VA per secondary winding</b>					
0-6V, 0-6V @ 6.25A	D3061	<b>160-003</b>			
0-9V, 0-9V @ 4.17A	D3062	<b>160-015</b>			
0-12V, 0-12V @ 3.120A	D3063	<b>160-027</b>			
0-15V, 0-15V @ 2.5A	D3064	<b>160-039</b>			
0-50V, 0-50V @ 0.75A	D3065	<b>160-040</b>			
Terminal shroud		<b>177-223</b>			
<b>100VA - 50VA per secondary winding</b>					
0-9V, 0-9V @ 5.55A	D3070	<b>160-052</b>			
0-12V, 0-12V @ 4.17A	D3071	<b>160-064</b>			
0-15V, 0-15V @ 3.33A	D3072	<b>186-788</b>			
0-50V, 0-50V @ 1.0A	D3073	<b>186-790</b>			
Terminal shroud		<b>177-223</b>			
<b>200VA - 100VA per secondary winding</b>					
0-9V, 0-9V @ 11.1A	D3078	<b>186-806</b>			
0-12V, 0-12V @ 8.3A	D3079	<b>186-818</b>			
0-15V, 0-15V @ 6.67A	D3080	<b>186-820</b>			
0-50V, 0-50V @ 2.0A	D3081	<b>186-831</b>			

continued

### Call for Latest Pricing

Products on this page may be subject to price changes in line with market trends. Call us for an update on (65) 788 0200.

### Total Customer Care

Our aim is to ensure you are 100% satisfied. If you ever have a query with your order, call us on (65) 788 0200