

Stocked in the following OHMIC Values:

100R = 349-781	2K = 349-811	20K = 349-847	200K = 349-872
500R = 349-793	5K = 349-823	50K = 349-859	500K = 349-884
1K = 349-800	10 = 349-835	100K = 349-860	1M = 349-896

RP78

Order Code	Price Each				
	1+	25+	100+	250+	1000+
.All Values					

Trimming Tools

TrimBeam – Illuminated Trimming Tool




- Trimming tool with a powerful xenon light
- Makes calibration and adjustments easy
- Two interchangeable tip sizes
- Includes red and blue/green colour filters to aid vision



rp243

TrimBeam	Order Code	Price Each		
		1+	3+	5+
	432-817			

POZ Series Trimming Tools

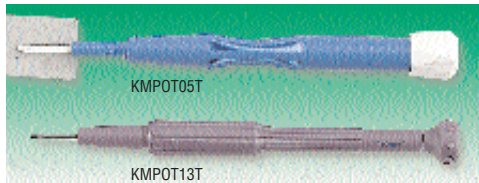

- KMPOT05 – recommended tool for manual adjustment of POZ2 trimmers
- KMPOT13T – recommended tool for manual adjustment of POZ3 trimmers
- Minus type slot
- Also suitable for leaded trimmer pots including Spectrol 76 Series




RP330

Mfrs. List No.	Order Code	Price Each			
		1+	3+	5+	10+
KMPOT05	353-1776				
KMPOT13T	353-1788				

Single

Spectrol

Bourns

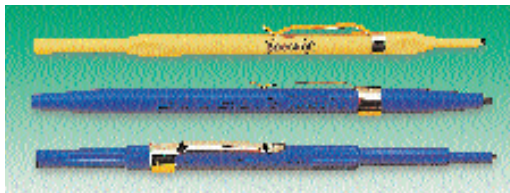

Double ended tools suitable for adjusting most types of single and multi turn trimmers.

H91 for use with 3224 SMD trimmer

rp29

	Order Code	Price Each		
		1+	50+	250+
Spectrol	.145-507.			
Bourns H90	109-151.			
Bourns H91	869-144			

Single Turn Potentiometers

9mm Snap-in



- Compact design horizontal or vertical mounting
- Integral bracket for direct PCB mounting.

Power rating 0.05W (single)
0.03 W (dual)
Voltage rating 50V a.c.
Resistance tolerance $\pm 20\%$
Mechanical rotation 280°

RP188




	Order Code	Price Each			
		1+	10+	25+	50+
Horizontal Logarithmic					
10K single	697-941				
Linear					
10K single	697-965				
Vertical Logarithmic					
10K single	697-977				
Linear					
10K single	697-990				

9mm Snap-In With Collar



- Horizontal mounting snap in design
- Metal collar to support shaft and improve stability
- Enclosed and dust proof

Power rating 0.05W (single)
0.03W (dual)
Voltage rating 50V a.c.
Resistance tolerance $\pm 20\%$
Mechanical rotation 300°




Mfrs. List No. RK09D111 Series

RP209


Value	Taper	Order Code	Price Each			
			1+	10+	50+	100+
6.5mm Mounting Height						
10K	B	918-635				
10K	A	918-647				
10mm Mounting Height						
10K	B	918-660				
10K	A	918-672				

9mm Snap-In



- Horizontal snap in design
- Enclosed and dust proof

Power rating 0.05W (single)
50V ac
Resistance tolerance $\pm 20\%$
Mechanical rotation 300°



Mfrs. List No.: RK09K111 Series

rp203

Value	Taper	Order Code	Price Each			
			1+	10+	50+	100+
10mm Mounting Height						
10K	B	918-805				
10K	A	918-817				
12.5mm Mounting Height						
10K	A	918-842				

continued

Linear Dimensions

All linear dimensions appear in (mm) unless otherwise stated.