

# Technical Data

Issue 11 / November 2007

## AT308 Double Sided Rayon Cloth Tape

### General description


A rayon cloth coated on both sides with an aggressive rubber resin adhesive and interleaved with a white siliconised paper release liner.

- Good low temperature resistance
- Strong

### Technical Details

#### Typical values

Tape thickness (Excluding liner)	0.25mm
Release liner weight	80gsm
Release liner thickness	73µm
Breaking Load	80 N/cm
Elongation	10%
Adhesion to Steel	
Faced Side	6.0 N/cm
Unfaced Side	4.0 N/cm
RoHS compliant	Yes
Service Temperature	-20°C to +70°C
Application Temperature	0°C to +40°C
Storage Temperature	+12°C to +25°C

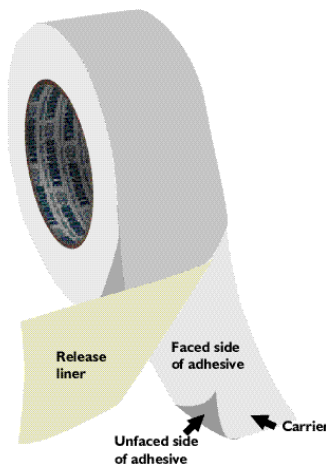

#### NOTE

Except where indicated otherwise, the figures stated are average values and should not be regarded as MAXIMUM or MINIMUM values for specification purposes. The Company reserves the right to improve products and any change in specification will result in a re-issue of the relevant 'Technical Data Sheet'. Customers should satisfy themselves that the tape is suitable for their requirements whether after such modifications or otherwise. Please check that you have the latest issue of the 'Technical Data Sheet'. All slitting and length tolerances are to British Standards. Before use the customer is advised to consult the Health & Safety Data Sheet produced by the company for this product, which is available on request.

#### STORAGE

Tapes stored below the minimum recommended temperature will require warming up to that level before use. Up to 24 hours may be required for this to take place.

**ADVANCE**  
adhesive tapes



INVESTOR IN PEOPLE

Advance Tapes International Limited, PO Box 122,  
Abbey Meadows, Leicester, LE4 5RA.

Tel: 0116 251 0191. Fax: 0116 265 2046. [www.advancetapes.com](http://www.advancetapes.com)

#### AFERA

Association des Fabricants Européens de  
Rubans Auto-Adhésifs.