


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

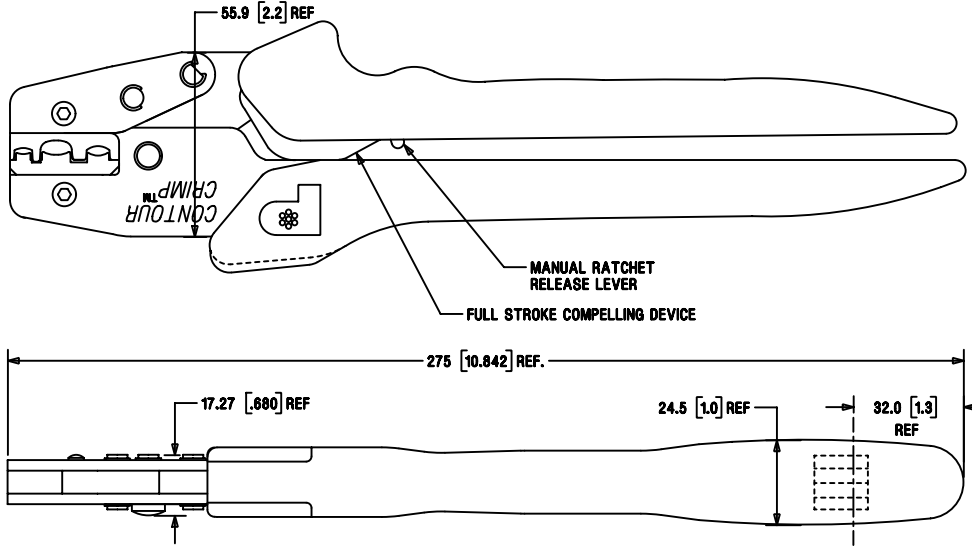

NOTES, UNLESS OTHERWISE SPECIFIED:

TOOL WEIGHT: 1.70 lbs./ 0.77 Kg

ALL DIMENSIONS IN METRIC (mm)
[] DIMENSIONS IN INCHES


HANDLES TO SPRING RETURN FREELY
TO OPEN POSITION AFTER CRIMPING

TOOL FRAME MEMBERS AND FASTENERS
TO INCORPORATE BLACK OXIDE FINISH

RECOMMENDED LUBE FOR FRAME LINKAGE:

MOLYKOTE BR2 PLUS
(SUPPLIER, DOW CORNING)

AWG, mm2 LETTERING AND ALL GUAGE
MARKINGS TO BE OF EQUAL SIZE OF
2.54[0.1] HEIGHT

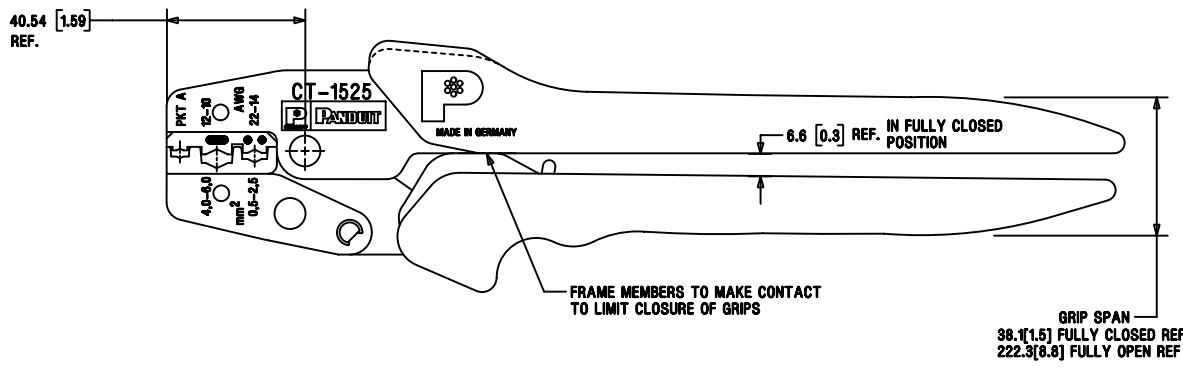

										CD FILE NO. R23624AA_TP23624C01_00			
										PANDUIT CORP. TINLEY PARK, ILLINOIS			
										CD#CT-1525			
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.XX) .XX (1.00X) .2 (1.00X) .25 ANGLES 2			
										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION			
										SCALE 1:1			
00	000	RBC	RLSD FOR PRODUCTION				3788	---	JFL	DATE 6-9-98	SEE NOTES	DWG NO. TP23624C01	REV C
REV	DATE	BY	CHK	DESCRIPTION				ECN	R	CUST	SLP	QMSH	DATE