

		PART NO.		REVISIONS								
		R-FC31G7210200C	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
			-	А	RELEASED	Jagan	18/06/09	Suresh	18/06/09	Farnell	02/07/09	







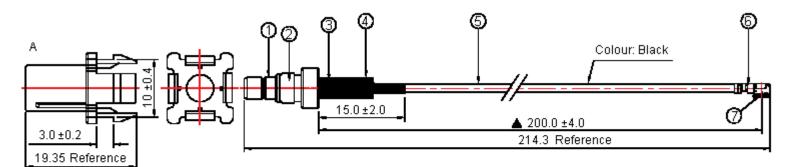

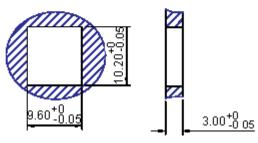

Recommended Mounting Hole

Dimensions : Millimetres

Specification	IS:
---------------	-----

Electrical Performance:	
Impedance	: 50Ω.
Frequency range	: DC to 1.6GHz.
Maximum working voltage	: 60V rms.
Minimum insulation resistance	: 500MΩ.

This data sheet and its contents (the "Information") belong to the Premier Farnell Group	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:			
(the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence	TOLERANCES:		<u> </u>	-			
of any intellectual property rights is granted. The Information is subject to change with-	UNLESS OTHERWISE	Jagan	18/06/09	t	Fakra C - U.FL Cal	ole - 200mm	
out notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this	SPECIFIED,	CHECKED BY:	DATE:	SIZE DWG NO.		ELECTRONIC FILE	REV
data sheet should check for themselves the Information and the suitability of the prod-	DIMENSIONS ARE	Suresh	18/06/09	Δ	M10002253	1714778-TDS DWG	A
use of it (including liability resulting from negligence or where the Group was aware of	FOR REFERENCE PURPOSES ONLY.	APPROVED BY:	DATE:		I		
the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC MULTICOMP is the registered trademark of the Group. © Premier Famel plc 2009.		Farnell	02/07/09	SCALE: NTS	U.O.M.: mm	SHEET: 1 OF	2

	PART NO.		REVISIONS							
	R-FC31G7210200C	ECN #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
		-	А	RELEASED	Jagan	18/06/09	Suresh	18/06/09	Farnell	02/07/09

Specification Table

Item	Description	Part Number
1	Fakra Code C B/H Plug, Crimp Type, For \01.37mm Cable	
2	Insulation for R-FC32201-F	
3	R-FC32201-F Inner Ferrule for ϕ 1.37 Cable	
4	Heat Shrink Tube F32, ¢2.5mm, L = 15.0mm, Colour: Black	R-FC31G7210200C
5	φ1.37mm Cable, Tin Plated, Colour: Black	
6	U.FL-LP-088 Shell for	
7	U.FL-088 Contact for	

http://www.farnell.com

http://www.newark.com

http://www.cpc.co.uk

This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for	TOLERANCES:	DRAWN BY:	DATE:	DRAWING TITLE:				
information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change with- out notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of ithe prod- ucts for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	Jagan	18/06/09] F	nm			
		CHECKED BY:	DATE:	SIZE DWG NO.	M10002253	ELECTRONIC FILE 1714778-TDS DWG		REV
		Suresh	18/06/09					A
		APPROVED BY:	DATE:					
		Farnell	02/07/09	SCALE: NTS	U.O.M.: mm	SHEE	ET: 2 O	F 2