



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG


REVISIONS

DOC. NO. SPC-F005 \* Effective: 7/8/02 \* DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1172	A	RELEASED	HYO	9/19/01	JWM	1/4/02	DJC	1/4/02
1884	B	Update To RoHS Compliant	EO	1/25/06	HO	1/25/06	HO	1/25/06



SPC Type No.	Width (Inches)	Color	Spool Length (Feet)
1631	0.025	Silver	5
1635	0.075	Gold	
1633	0.050	Green	
1637	0.100	Blue	
1639	0.125	Brown	
1632	0.025	Silver	10
1636	0.075	Gold	
1634	0.050	Green	
1638	0.100	Blue	
1640	0.125	Brown	

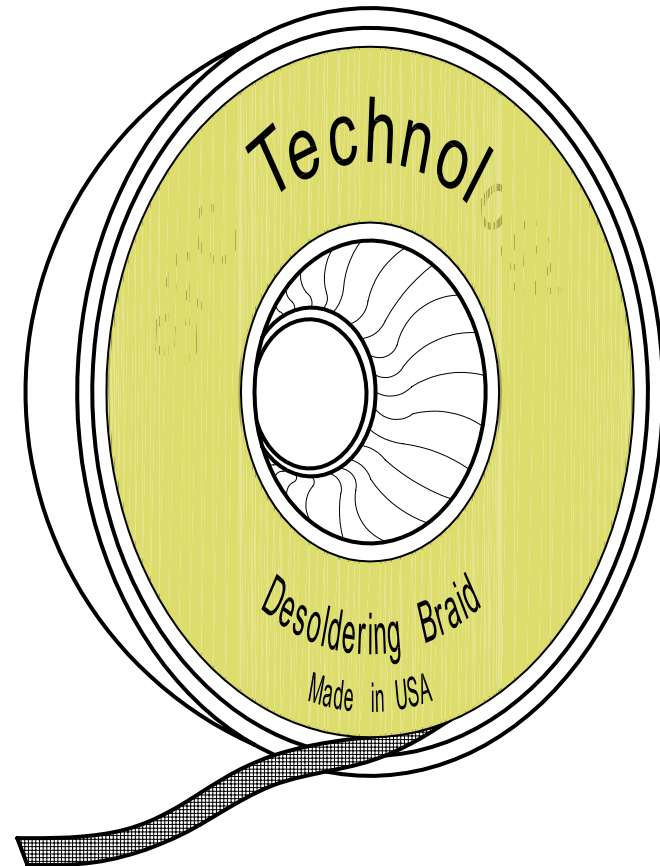

**Specifications:**

- Clean, Fast, Reliable
- Oxide-free clean copper More strands of copper (more surface area) per square inch
- Flux residue remaining on board does not need to be cleaned
- To be used in conjunction with processes using RMA type no-clean fluxes; conforms to the requirements of ANSI/J-STD-004, Type LO
- High SIR-conforming to Bellcore specification GR-78-CORE (TR-TSY-000078), and IPC Test Method III
- Comply with the ESD Association Standard (Mil. Standard 2000 and ANSI/ESD S2020)
- Cleaned and manufactured utilizing the latest technology in environmentally friendly chemicals and processes

DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
HISHAM ODISH	9/19/01
CHECKED BY:	DATE:
JEFF MCVICKER	1/4/02
APPROVED BY:	DATE:
DANIEL CAREY	1/4/02

DRAWING TITLE: RoHS Compliant No Clean, Anti-Static Desoldering Braid			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-413	TA-413.DWG	B
SCALE: NTS	U.O.M.: INCHES	SHEET: 1 OF 1	