


BETADUCT® CABLE TRUNKING

-146.546 | 146.549 -



NORYL® XTRA BETADUCT®


- Limited Fire Hazard (LFP) product
- Self extinguishing Noryl Xtra is UL94 V0 rated
- CSA and UL approved

Noryl Xtra Betaduct is designed for use in confined areas where human life or electronic components could be at risk. The products of combustion are free from toxic halogens. Noryl Xtra is self extinguishing with a UL94 V0 flammability rating. Supplied complete with lid.

In addition to the above properties, Noryl Xtra is a low smoke material approved to BS476 Part 7 Class 1(Y). Service temperature range: -30°C to +120°C. Noryl® is a registered trademark of GE Plastics.

BETADUCT® ACCESSORIES

- Complete range of accessories

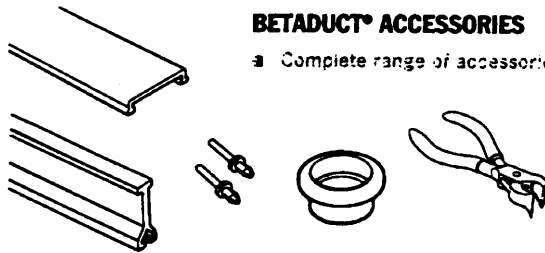


Lid sections are available in packs of either PVC or Noryl Xtra.

Dividers provide separated channels within one duct. Mounted on insulating washers.

Insulation Washers provide location for dividers. Fixed by screws into duct base.

Rivets are applied with hand rivetter for speedy fixing of Betaduct to panels without the need for rear access.

Sidecutters allow clean professional removal of Betaduct slotted sides.



BETADUCT® CABLE TRUNKING Supplied with lid

Norm. size Inner (wxh)	Outer (wxh)	Packed (In 2m lengths) m	Order code Grey RAL 7030 PVC	Order code Black standard PVC	Order code Blue PVC	Order code Black Noryl® Xtra™
CLOSED SLOT BETADUCT						
15/15	17/17	24	146-546	10460011	0900	-
19/50	25/53	24		10460018	0950	-
25/20	29/23	24	146-547	10460021	0901	-
25/35	29/38	24		-	-	23451
25/37.5	29/41	24		10460022	0951	-
25/50	29/54	24	146-548	10460023	0903	-
25/75	29/79	16		10460024	0904	23452
25/100	30/105	16		10460025	0953	23453
37.5/50	41/54	16		10460033	0955	-
37.5/75	39/79	16		10460034	0956	-
37.5/100	43/105	16		10460035	0975	-
50/25	54/28	24		10460051	0938	-
50/37.5	54/41	16		10460052	0959	-
50/50	54/54	16	146-549	10460053	0906	23450300
50/75	55/79	16		10460054	0907	23454
50/100	56/105	8		10460055	0962	23455
75/50	78/54	16		10460073	0964	-
75/75	80/80	16		10460074	0909	23456
75/100	80/105	8		10460075	0966	-
100/50	107/54	8		10460103	0968	-
100/75	107/80	8		10460104	0969	-
100/125	107/130	8		10460106	0971	-
125/75	131/78	8		10460124	0940	-