

PRODUCT NUMBER

54102 - X XX - XX - XXX X LF

LEAD FREE  
NOTE 12 & 13

RETENTION  
R= RETENTIVE LEG, SEE NOTES 5 & 7



POLARIZATION SEE NOTES 7 & 8

BERGSTIK  
POSITIONS PER ROW, 01 to 36  
SEE NOTE 10

BERGSTRIK  
POSITIONS PER REEL, 00=45,000 (BERGSTRIK)  
PIN STYLES 6,8,10,30 & 32 ONLY.

PIN STYLE	POST	TAIL	OAL
05	0.230/5.84	0.095/2.41	0.425/10.80
06	0.230/5.84	0.110/2.79	0.440/11.18
08	0.230/5.84	0.120/3.05	0.450/11.43
10	0.230/5.84	0.150/3.81	0.480/12.19
12	0.230/5.84	0.300/7.62	0.630/16.00
30	0.318/8.08	0.120/3.05	0.538/13.67
32	0.318/8.08	0.150/3.81	0.568/14.43
34	0.318/8.08	0.212/5.38	0.630/16.00

PLATING:  
S=15u"/0.38um GOLD ON CONTACT AREA  
100u"/2.54um TIN ON TAIL (NOTE 16)  
G=30u"/0.76um GOLD ON CONTACT AREA  
100u"/2.54um TIN ON TAIL (NOTE 16)  
T=100-160u"/2.54-4.06um TIN ON CONTACT AREA  
AND ON TAIL (SEE NOTE 11 & 15).

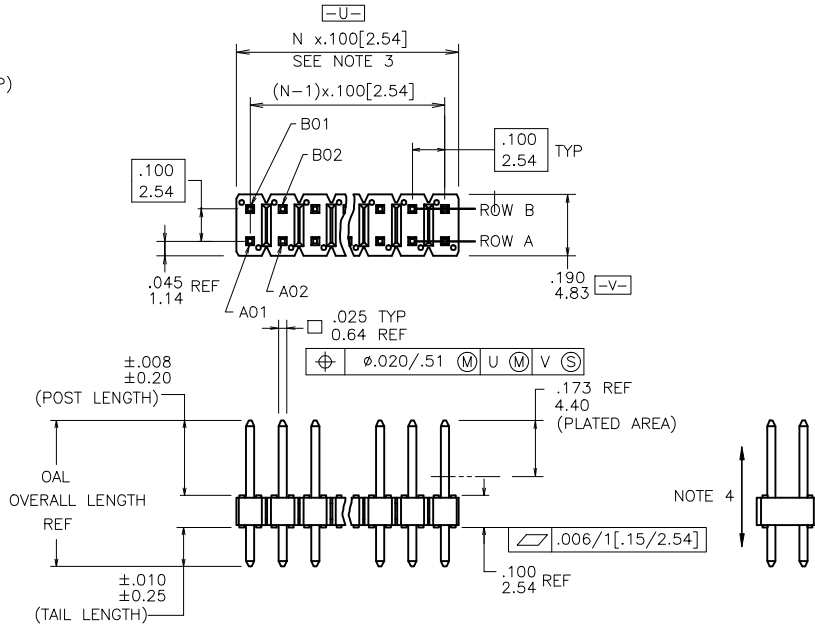

mat'l. code SEE NOTES 1 & 2	surface ISO 1302	tolerance ISO 1101	projection INCH/MM	product family BERGSTIK
ltr	ecn no	dr	date	title .100 UNSHROUDED HDR. D/R THRU HOLE
L	M06-0268	MHT	7/17/06	scale 1:1
M	M06-0346	MHT	9/04/06	sheet 1 of 2 size 54102 A3
N	M07-0247	AGS	5/28/07	type Product Customer Drawing
P	M07-0337	MHT	7/23/07	
R	M08-0237	MHT	8/25/08	
S	M08-0279	MHT	9/30/08	
T	M09-0090	MHT	6/19/09	
sheet	revision	T	T	
index	sheet	1	2	



Copyright FCI

