


REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1272	D	Renamed...was PCG-****	JWM	12/19/01	DJC	12/28/01	DJC	12/28/01
1865	E	RoHS ADDED	DCM	10/17/05	JWM	10/18/05	JWM	10/18/05

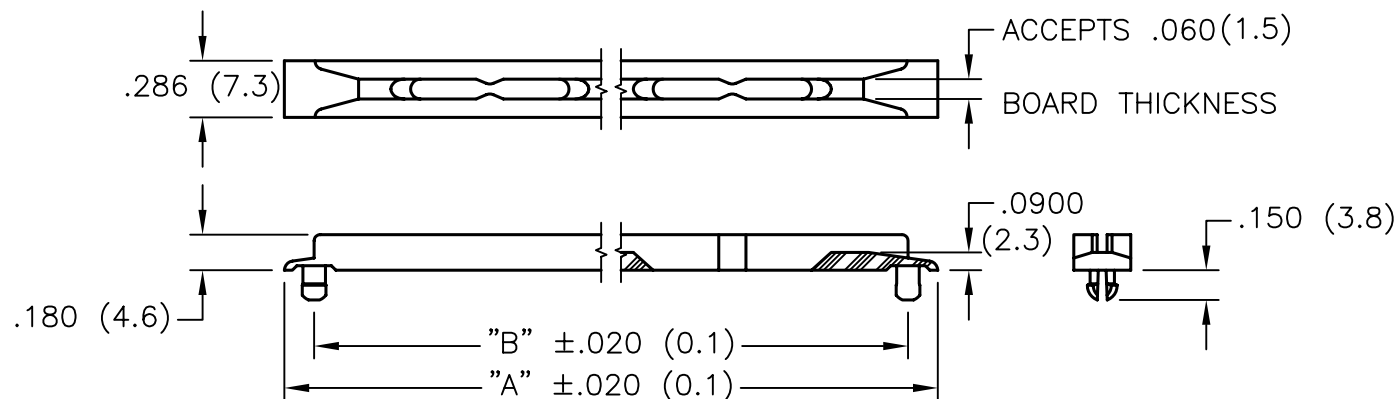


PART NO.	NOM. "A"	NOM. "B"	NO. OF GRIPS
PCG3925	3.925 (99.7)	3.625 (92.1)	2
PCG6675	6.675 (169.5)	6.375 (161.9)	4

NOTES:

1. MATERIAL: POLYCARBONATE
2. COLOR: BLACK
3. FLAMMABILITY RATING: UL94V-0
4. CONTINUOUS USE TEMPERATURE: -40°F [-40°C] to 257°F [125°C]
5. DIELECTRIC STRENGTH: 425 VOLTS/MIL

RECOMMENDED MOUNTING HOLES

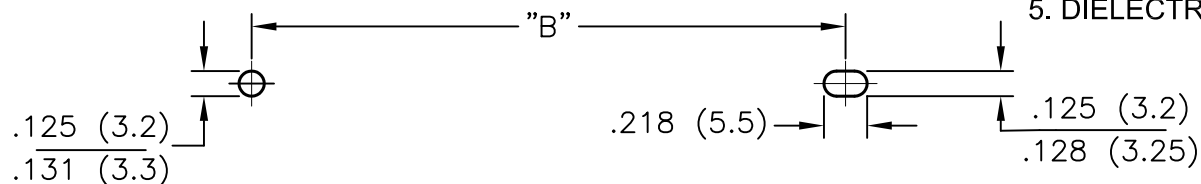

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

TOLERANCES UNLESS OTHERWISE SPECIFIED
.X = ±0.015
.XX = ±0.010
.XXX = ±0.005
Fraction = ±1/64

DRAWN BY:

J.C.

DATE:

9/3/91

CHECKED BY:

J.C.

DATE:

9/3/91

APPROVED BY:

J.C.

DATE:

9/3/91

DRAWING TITLE:

TENSION CARD GUIDE

SIZE DWG. NO.

A

TA-475

ELECTRONIC FILE

TA-475.dwg

REV

E

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1