

222A111 to 196


Right-angled boot




Applications

Use for mechanical protection and connector-cable strain relief. This family of boots has no lip, so a boot can be installed directly onto the connector accessory thread.

As supplied (a)

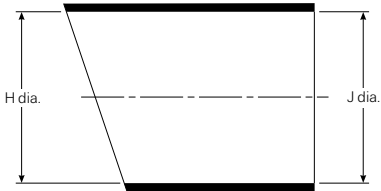

After unrestricted recovery (b)

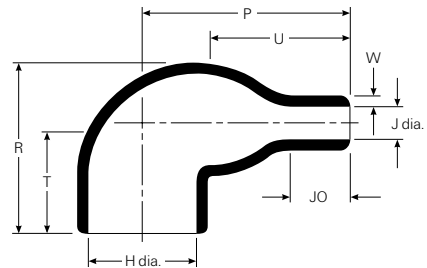

Available in:

Americas

Europe

Asia Pacific



Fax-on-demand

US only (800) 260-9099

Outside US (650) 257-2301

Fax ID

3139

Description

SCD

Visit our website at www.tycoelectronics.com**Materials available**

Material*	Material description	Precoating no.	Adhesive part no.**
-3	Semirigid polyolefin	/42 or /86	S-1017 or S-1048
-4	Flexible polyolefin	/42 or /86	S-1017 or S-1048
-12	Viton	N/A	S-1255-04
-25	Fluid-resistant elastomer	/42 or /86 or /225	S-1017 or S-1048 or S-1125
-100	Polyolefin, Zerohal	/180	S-1030

J end coated only, S1030 tape
supplied in bag for H end

*For more information, please see the appropriate material page in this section.

**For more information, please see Section 5 of this catalog.

Product dimensions (mm/in)

Part Number	H		J			
	Min. a	Max. b	Min. -3, -4, -25 a	Min. -100 a	Min. -12 a	Max. b
222A111	17.8 (.70)	7.9 (.31)	17.8 (.70)	10.9 (.43)	9.9 (.39)	3.8 (.15)
222A121	24.9 (.98)	10.2 (.40)	24.9 (.98)	16.0 (.63)	18.0 (.71)	5.3 (.21)
222A132	30.0 (1.18)	14.2 (.56)	30.0 (1.18)	21.1 (.83)	20.6 (.81)	6.4 (.25)
222A142	32.5 (1.28)	17.3 (.68)	32.5 (1.28)	22.9 (.90)	22.9 (.90)	6.9 (.27)
222A152	36.1 (1.42)	21.8 (.86)	36.1 (1.42)	27.4 (1.08)	26.4 (1.04)	8.4 (.33)
222A163	43.9 (1.73)	27.4 (1.08)	43.9 (1.73)	28.4 (1.12)	27.4 (1.08)	9.4 (.37)
222A174	53.1 (2.09)	33.8 (1.33)	53.1 (2.09)	48.3 (1.90)	46.7 (1.84)	15.0 (.59)
222A185	67.6 (2.66)	44.2 (1.74)	67.6 (2.66)	58.4 (2.30)	54.4 (2.14)	20.3 (.80)
222A196	87.6 (3.45)	55.4 (2.18)	87.6 (3.45)	68.8 (2.71)	63.0 (2.48)	23.4 (.92)

Part Number	P	R	T	U	JO	W
	±10% b	±10% b	±10% b	±10% b	±10% b	±20% b
222A111	17.3 (.68)	20.1 (.79)		11.4 (.45)	4.3 (.17)	1.02 (.04)
222A121	21.3 (.84)	22.6 (.89)		14.7 (.58)	5.8 (.23)	1.27 (.05)
222A132	26.9 (1.06)	26.7 (1.05)	19.1 (.75)	17.8 (.70)	7.1 (.28)	1.52 (.06)
222A142	36.6 (1.44)	30.5 (1.20)	19.1 (.75)	24.9 (.98)	10.2 (.40)	1.78 (.07)
222A152	43.7 (1.72)	35.1 (1.38)	19.1 (.75)	30.0 (1.18)	12.7 (.50)	1.78 (.07)
222A163	53.6 (2.11)	43.9 (1.73)	19.1 (.75)	34.0 (1.34)	17.3 (.68)	2.03 (.08)
222A174	75.7 (2.98)	52.8 (2.08)	25.4 (1.00)	53.3 (2.10)	32.0 (1.26)	3.30 (.13)
222A185	97.5 (3.84)	66.0 (2.60)	25.4 (1.00)	71.1 (2.80)	40.6 (1.60)	3.81 (.15)
222A196	128.0 (5.04)	79.2 (3.12)	25.4 (1.00)	87.6 (3.45)	56.4 (2.22)	4.57 (.18)

Note: Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by 1.5 mm (.06") max.

Users should independently evaluate the suitability of the product for their application.
Before ordering check with factory for most current data.