
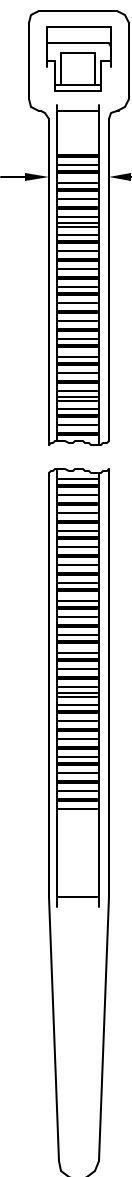


| REVISIONS |     | DDC. NO. SPC-FD05, Total Pages: 2 |        |         |        |          |        |         |
|-----------|-----|-----------------------------------|--------|---------|--------|----------|--------|---------|
| DCP #     | REV | DESCRIPTION                       | DRAWN  | DATE    | CHECKD | DATE     | APPRVD | DATE    |
| 09        | A   | RELEASED                          | J.W.M. | 10/8/97 | J.C.   | 10/24/97 | B.B.   | 11/4/97 |
| 421       | B   | Electronic file name change       | J.W.M. | 2/5/98  | J.C.   | 2/5/98   | J.C.   | 2/5/98  |

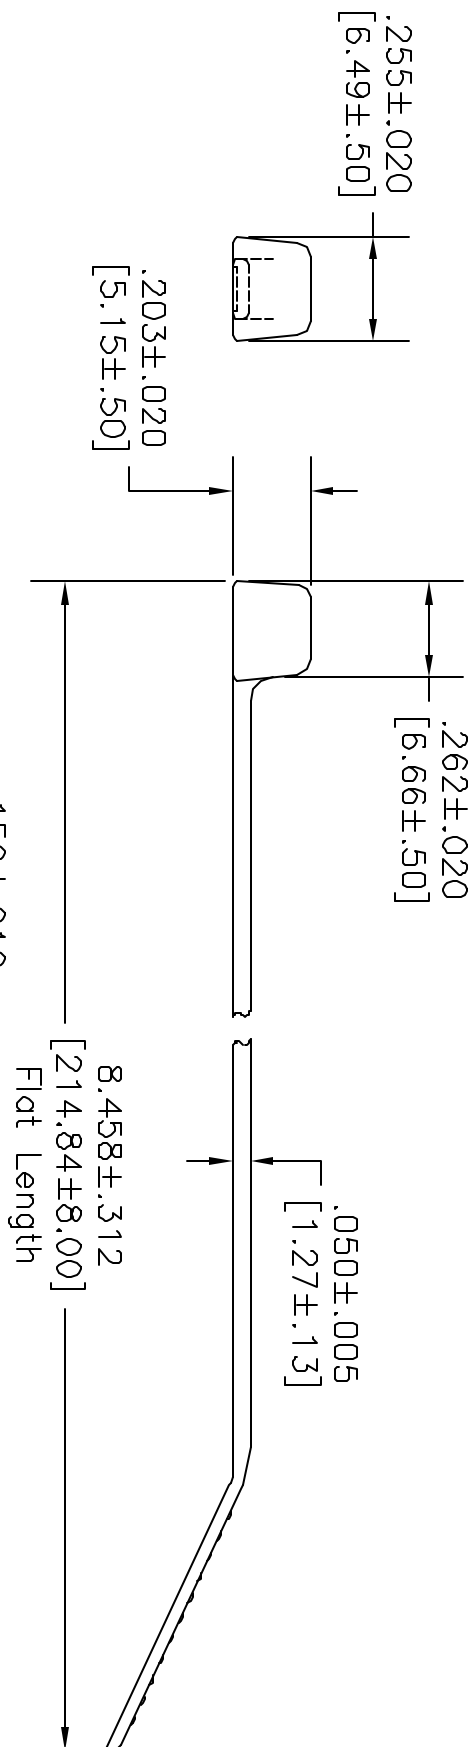

NOTES:  
 Material: Nylon 6/6-HSO  
 Color: Black  
 Packed: 1000 to Bag  
 Max. Bundle Dia: 2.00 [50.80]  
 Min. Bundle Dia: .063 [1.59]  
 Min. Loop Tensile Strength: 40lbs.

**DISCLAIMER**  
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

**Usual Observation Specified Dimensions are shown for reference only! Your own tests will determine the suitability of this product for your application.**

|               |          |
|---------------|----------|
| DRAWN BY:     | DATE:    |
| Jeff McVicker | 10/8/97  |
| CHECKED BY:   | DATE:    |
| JOHN COLE     | 10/24/97 |
| APPROVED BY:  | DATE:    |
| BRETT BRAATZ  | 11/4/97  |

|                             |           |                 |     |        |  |
|-----------------------------|-----------|-----------------|-----|--------|--|
| DRAWING TITLE:              |           | SCALE:          |     | SHEET: |  |
| Cable Tie - Heat Stabilized |           | NTS             |     | 1 OF 1 |  |
| SIZE                        | DWG. NO.  | ELECTRONIC FILE | REV |        |  |
| A                           | 8409-0378 | 16N868.dwg      | B   |        |  |

