

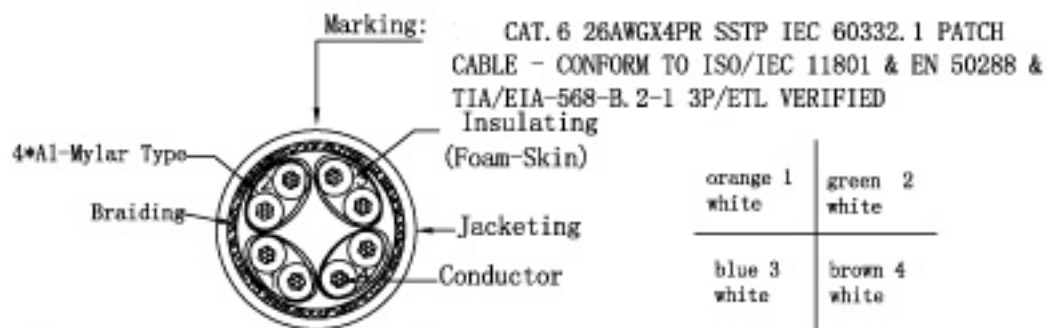


DATE	REV	DESCRIPTION	BY	CHKD

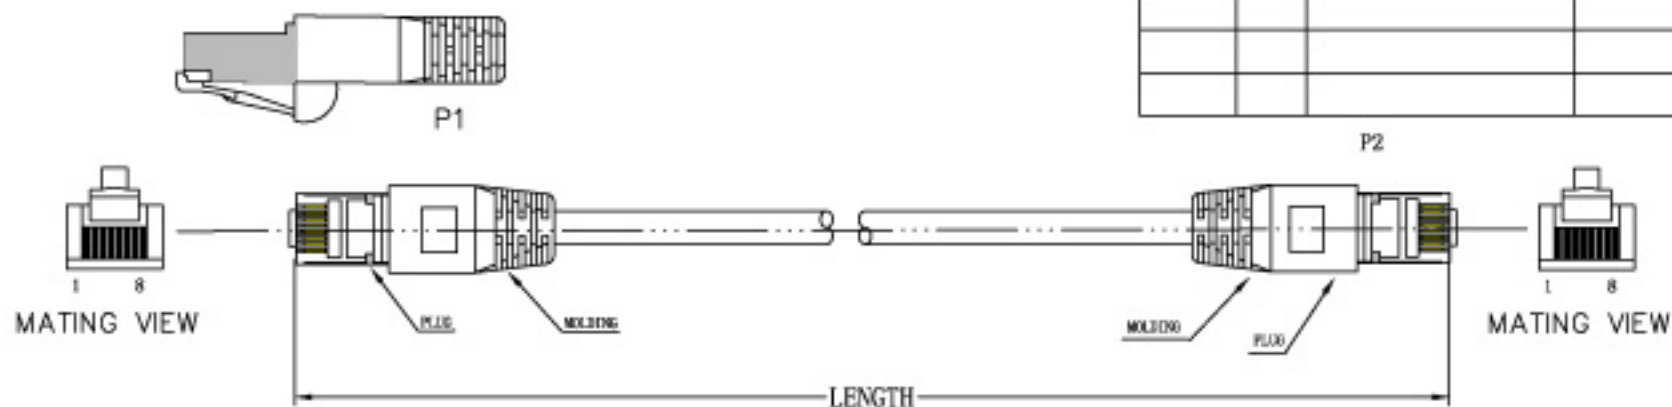

Conductor	Base Copper 26AWG 35.1±0.05mm
Insulation	Thickness:MIN at any point 0.2mm MAX.AVG.0.15mm Diameter: 1.09±0.05mm
Jacketing	PVC Thickness:MIN at any point 0.45mm MAX.AVG.0.55mm Diameter: 1±0.2mm

WIRE	CAT. 6 FIMF STR 26AWG4P
PLUG	YS-02 8PSC 50u
LENGTH	1M
COLOR	GYB25



PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

RoHS Compliant

Unless specified on the drawing, tolerances are per the follows:
 . ± 1
 .X ± 0.2
 .XX ± 0.05



DRAW. NO	YS-02	ITEM	2002-1		
DEPARTMENT		DRAW	ZhaoyangWu	DATE	2007/06/07
SCALE		CHECKER	APPROVAL		
UNIT	MM	SHEET	1	OF	1