


# Size 1/2 AA

206-520

Keyword: Stand-by and Long Life

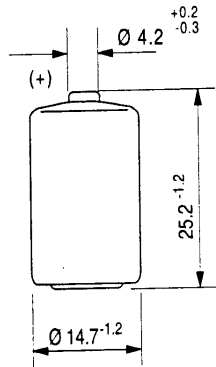

Available Terminations:  
(see page 5)

- SL-350/S Standard
- SL-350/T Tags
- SL-350/P Pins
- SL-350/PR Pins Radial
- SL-350/PT Polarized Tags

Type:

SL-350




**Performance Data**

(Typical values at 25 °C for batteries stored for one year)

System	Li/SOCl <sub>2</sub>
Nominal capacity	0.85 Ah
Nominal voltage	3.6 V
Max. continuous discharge current	10 mA

Anode surface area	6 cm <sup>2</sup>
Weight	10 g
Volume	4.3 cm <sup>3</sup>
Temperature range	-55...+85 °C

**WARNING:** Risk of fire or explosion. Do not recharge, force open, heat, or dispose of in fire.

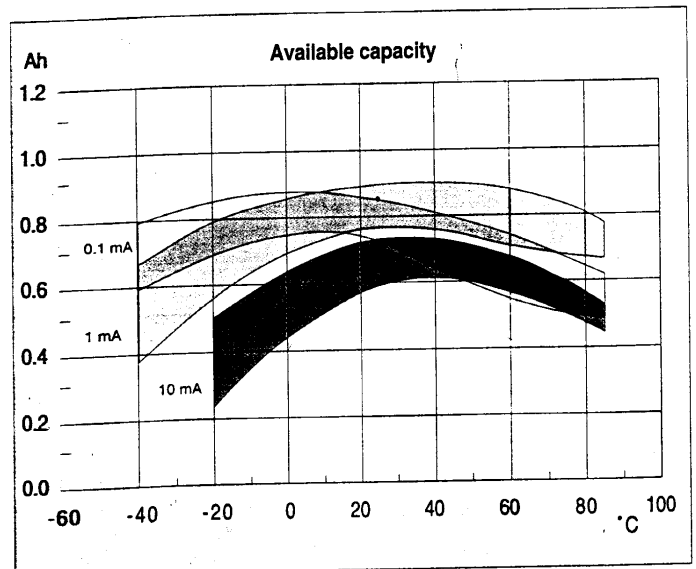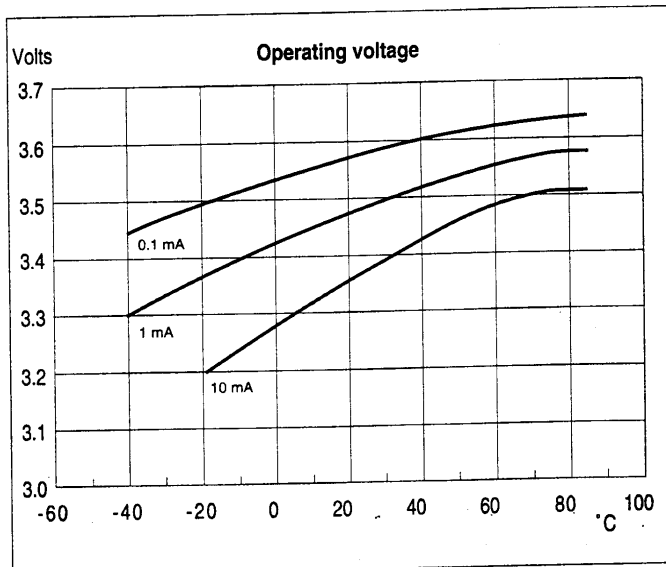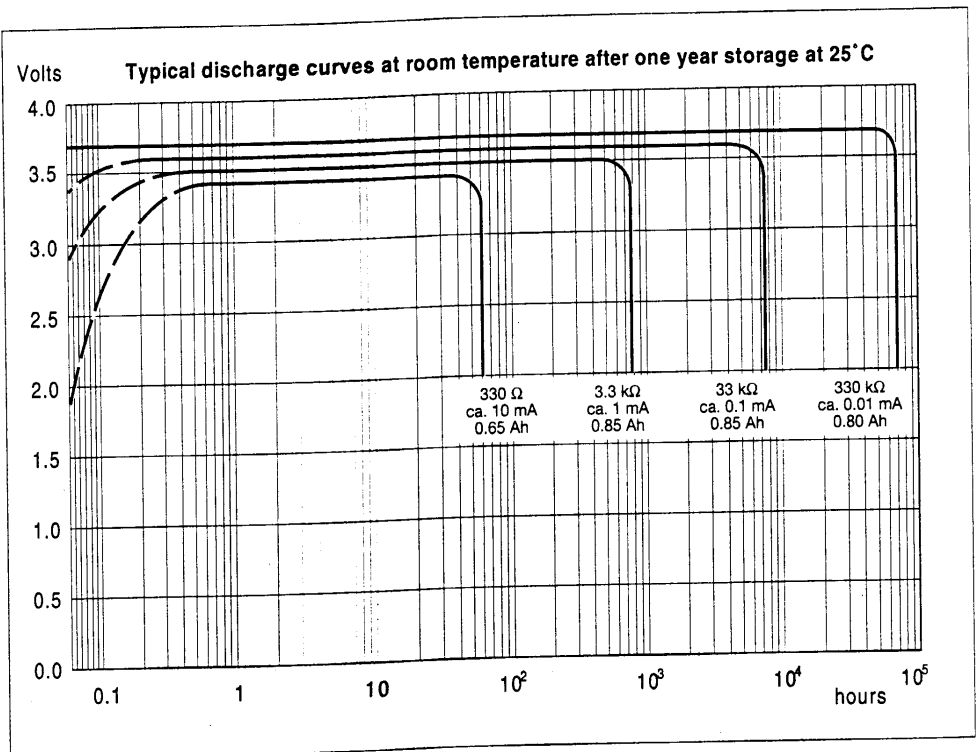

Any values given here are for informational purpose only. They also depend on actual conditions of use and are not warranties of future performance.